



Sample image

Datasheet

Article number: 70019403

Designation: KG10B.T104/01.E

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
690 AC						
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
20	50	55	Ambient temperature +50°C during 24 hours with peaks up to +55°C			
Rated operational current Ie						
Utilization category			Voltage (V)		Current (A)	
AC-15			220 - 240		6	
AC-15			380 - 440		4	
Rated operational power						
Utilization category		Voltage (V)	No. of phases	No. of poles	Power (kW)	
AC-3		220 - 240	3	3	2,20	
AC-3		380 - 440	3	3	3,70	
AC-3		660 - 690	3	3	3,70	
AC-3		220 - 240	1	2	1,10	
AC-3		380 - 440	1	2	1,50	
AC-23A		220 - 240	3	3	3	
AC-23A		380 - 440	3	3	5,50	
AC-23A		660 - 690	3	3	5,50	
AC-23A		220 - 240	1	2	1,50	
AC-23A		380 - 440	1	2	2,20	
Max Fuse Rating IEC						
Fuse characteristic				No. of Fuses	Current (A)	
gG				1	20	
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC						
300 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
300 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C)		Additional Text		
20		0 - 40		--		
20		0 - 40		--		
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL		110 - 220	1	2	0,50	40
DOL		220 - 240	1	2	1	40
DOL		277 - 277	1	2	1	40
DOL		110 - 120	3	3	1	40
DOL		220 - 240	3	3	2	40
Pilot duty rating code						
Duty Code						
A300						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 300V ac max. when protected by Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
60 - 75			– Use copper wire only			
Connecting instructions						
Markings						
Break all lines.						
For use on a flat surface of a type 1 enclosure.						
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	20	1	1	1	

General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	300	20	1	2	1	
AC	300	20	3	3	1	
General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
				Voltage (V) AC / DC		
				300 AC		
Rated insulation voltage Ui						
				Voltage (V) AC / DC		
				300 AC		
Rated thermal current						
		Current (A)			Ambient temperature (°C)	Additional Text
		20			0 - 40	--
		20			0 - 40	--
Horsepower rating						
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]	
DOL	110 - 220	1	2	0,50	40	
DOL	220 - 240	1	2	1	40	
DOL	277 - 277	1	2	1	40	
DOL	110 - 120	3	3	1	40	
DOL	220 - 240	3	3	2	40	
Pilot duty rating code						
Duty Code						
A300						
Temp. rating of wire						
		Temperature rating (°C)			Current (A)	Text
		75			--	--
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	277	20	1	1	1	
AC	277	20	3	3	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			0,60		5	
Stripping length						
			Length (mm) --			
			8 STRIPPINGLENGTH			
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire	
solid wire	Min.	1	0.5mm²		Copper	
solid wire	Min.	2	0.5mm²		Copper	
flexible wire	Min.	1	0.75mm²		Copper	
flexible wire	Min.	2	0.75mm²		Copper	
flexible wire	Max.	1	AWG 12		Copper	
flexible wire	Max.	1	2.5mm²		Copper	
Single-core or stranded wire	Max.	1	AWG 12		Copper	
Single-core or stranded wire	Max.	1	2.5mm²		Copper	
flexible wire with ferrule according to DIN 46228	Max.	1	2.5mm²		Copper	
flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm²		Copper	
flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm²		Copper	
Approbations						
Specification					Marking	
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Recommended screw driver						
Type of screw driver			Value			
Cross Screwdriver			PH1			
Slot screwdriver according to DIN 5264			0,8x4			
General Information						
Text						
- Do not lubricate or treat contacts.						

General Information

Text

- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-E

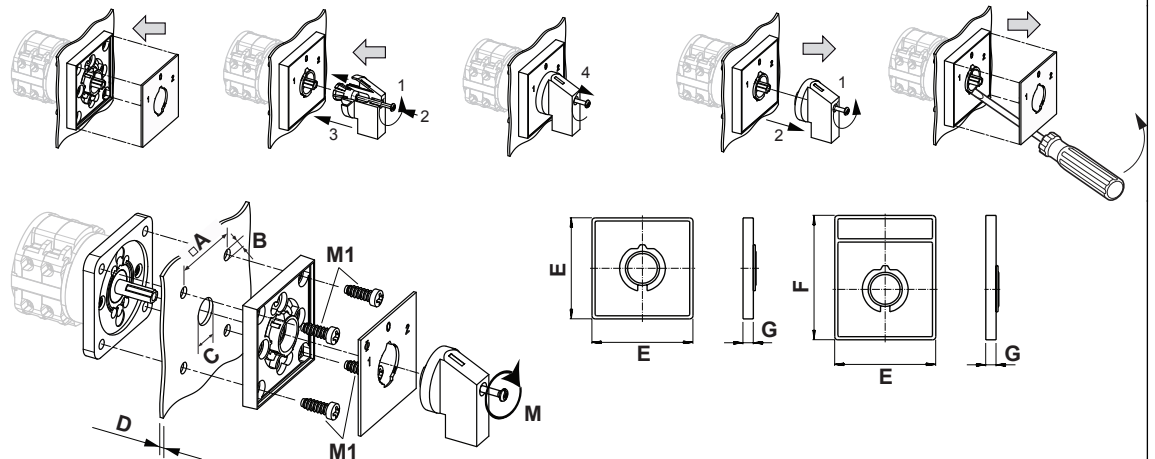


IP - Code front side		IP66, IP67
Stages		1,00 - 12,00
A	□	48,00 mm
B	∅	5,00 mm
C	∅	11,00 - 15,00 mm
D	H	<= 4,00 mm
E	∅	64,00 mm
F	H	78,50 mm
G	H	7,40 mm
M	↺	0,70 Nm
M1	↺	0,90 Nm



Wiring diagram

KG10B.T304.E

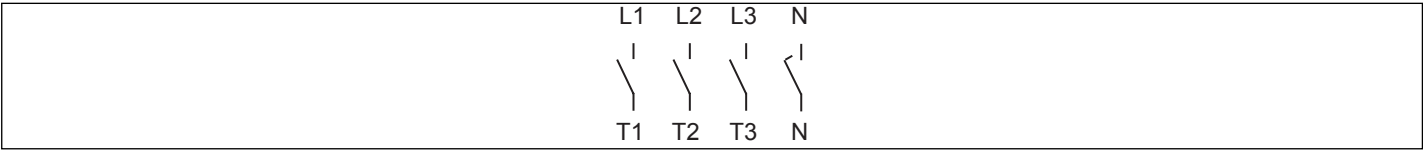

Switch program

KG10B.T304E



Kraus & Naimer

KG10B **T304E** **Page 1 of 1**

Face Plate													
		T3	T1	N	T2								
		1	3	5	7	9	11	13	15	17	19	21	23
		Marking plate: SOD H043 51A											
													
Switching Angle	90	2	4	6	8	10	12	14	16	18	20	22	24
Total switching Angle	90	L3	L1	N	L2								
0	270												
	285												
	300												
	315												
	330												
	345												
1	0												
	15												
	30												
	45												
	60												
	75												
	90												
	105												
	120												
	135												
	150												
	165												
	180												
	195												
	210												
	225												
	240												
	255												

Version: 2

Face plate

S1.F456/C10.V11H





Sample image

PADLOCK DEVICE with F-handle ring

Designation: S1.V840G/A71/A1

Colour of F-handle ring: "A" black

Colour of face ring: "7" electro-grey

Locking position: "1" at 09:00 (1x90°)

Type of mounting: "A" for type of mounting E

Type of mounting: "A" for type of mounting GK (Rose)

Switch type: "1" for C-switches and for KG10.

