



Sample image

Datasheet

Article number: 70024027

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
定格絶縁電圧 Ui					
			電圧 (V) AC / DC		
			690 AC / DC		
定格連続通電電流 Iu/It					
Current (A)	周囲温度 (°C)	ピーク温度 (°C)	追加要求事項		
20	55	60	周囲温度 +55°C、24 時間、ただし 瞬時ピーク温度 +60°C		
定格操作電流 Ie					
負荷種別				電圧 (V)	Current (A)
AC-15				220 - 240	6
AC-15				380 - 440	4
定格操作電力					
負荷種別	電圧 (V)	相数	極数	電力 (kW)	
AC-3	220 - 240	3	3	3	
AC-3	380 - 440	3	3	5,50	
AC-3	660 - 690	3	3	5,50	
AC-3	220 - 240	1	2	2,20	
AC-3	380 - 440	1	2	3	
AC-23A	220 - 240	3	3	3,70	
AC-23A	380 - 440	3	3	7,50	
AC-23A	660 - 690	3	3	7,50	
AC-23A	220 - 240	1	2	2,50	
AC-23A	380 - 440	1	2	3,70	
最大ヒューズ定格 IEC					
ヒューズ特性				ヒューズ数	Current (A)
gG				1	25
UL60947-4-1, UL508					
Nominal Voltage					
			電圧 (V) AC / DC		
			600 AC		
定格絶縁電圧 Ui					
			電圧 (V) AC / DC		
			600 AC		
定格熱電流					
Current (A)		周囲温度 (°C) 備考			
20		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting	電圧 (V)	相数	極数	Power (HP)	Ambient temperature [°C]
Reversing	110 - 120	1	2	0,17	40
Reversing	220 - 240	1	2	0,50	40
Reversing	277 - 277	1	2	0,60	40
Reversing	415 - 415	1	2	1	40
Reversing	440 - 480	1	2	1,50	40
Reversing	550 - 600	1	2	1,50	40
Reversing	110 - 120	3	3	0,50	40
Reversing	220 - 240	3	3	1	40
Reversing	415 - 415	3	3	2	40
Reversing	440 - 480	3	3	3	40
Reversing	550 - 600	3	3	3	40
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	440 - 480	1	2	2	40
DOL	550 - 600	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40
DOL	415 - 415	3	3	5	40
DOL	440 - 480	3	3	5	40
DOL	550 - 600	3	3	5	40

Pilot duty rating code						
Duty Code						
A600						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
60 - 75			-- Use copper wire only			
Connecting instructions						
Markings						
モータ断路器として使用する場合は、装置にはOFF位置でロックする方法を設けなければならない。						
General Use						
AC / DC	電圧 (V)	Current (A)	相数	極数	No. of contacts in series	
AC	600	20	1	2	1	
AC	600	20	3	3	1	
CSA						
Nominal Voltage						
			電圧 (V) AC / DC			
			600 AC			
定格絶縁電圧 Ui						
			電圧 (V) AC / DC			
			600 AC			
定格熱電流						
Current (A)			周囲温度 (°C) 備考			
20			0 - 40 --			
Horsepower rating						
Across-the-Line Motor Starting		電圧 (V)	相数	極数	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	0,50	40
DOL		220 - 240	1	2	1	40
DOL		277 - 277	1	2	2	40
DOL		415 - 415	1	2	2	40
DOL		440 - 480	1	2	2	40
DOL		550 - 600	1	2	2	40
DOL		110 - 120	3	3	1,50	40
DOL		220 - 240	3	3	3	40
DOL		415 - 415	3	3	5	40
DOL		440 - 480	3	3	5	40
DOL		550 - 600	3	3	5	40
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
Temperature rating (°C)			Current (A) Text			
75			-- only			
General Use						
AC / DC	電圧 (V)	Current (A)	相数	極数	No. of contacts in series	
AC	600	20	1	1	1	
GENERAL TECHNICAL INFORMATION						
端子ネジ締付トルク						
			締付トルク (Nm)		締付トルク (lb-in)	
			0,60		5	
Stripping length						
			Length (mm) --			
			8 STRIPPINGLENGTH			
電線サイズ						
電線種別	最小値 / 最大値		1端子当たりの配線数		断面積 (mm²) or (AWG/kcmil)	電線材料
単線	最小		1		0.5mm²	銅
単線	最小		2		0.5mm²	銅
細撚線	最小		1		0.75mm²	銅
細撚線	最小		2		0.75mm²	銅
細撚線	最大		2		2.5mm²	銅
細撚線	最大		2		AWG 14	銅
単線または荒撚線	最大		2		AWG 12	銅
単線または荒撚線	最大		2		2.5mm²	銅
DIN46228規格フェール適用の細撚線	最小		1		0.5mm²	銅
DIN46228規格フェール適用の細撚線	最大		2		2.5mm²	銅
DIN46228規格フェール適用の細撚線	最小		2		0.5mm²	銅
認証						
仕様						
マーキング						
EAC						
CEマーキング						
UK Directives						
UK CA						

認証仕様

マーキング

CSA C.22.2 No.14



Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x4

注意事項

備考

- 接点に潤滑剤を塗布したり、表面処理をしたりしないでください。
- スイッチの取り付け、接続、操作の設定は、技術的に認められた規則に従って、有資格者のみが行うことができます。
- 銅線のみを使用してください。電線を半田付けしないでください。
- ジャンパー線(コモン線)に接続された端子ネジは工場出荷時には仮締め状態となっています。ジャンパー線(コモン線)に接続された端子ネジの締め付けを含む全ての端子ネジが、必ず適切なトルクで締められていることをご確認の上、ご使用ください。
- スイッチの設置後、端子間の間隔は、適用される規格の要件を満たすのに十分なものでなければなりません。

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com


Proposition 65

Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver


Classification Terminal: Screw terminal

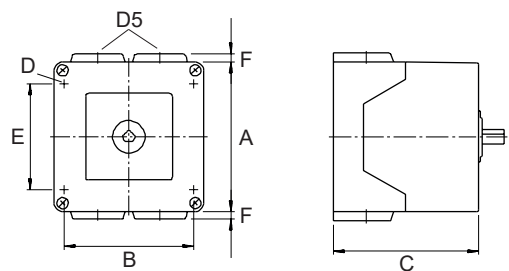Mounting-PF1		
		
IP - Code front side	IP65	
Stages	1,00 - 2,00	
A		82,00 mm
B		68,00 mm
C		64,70 mm
D		4,40 mm
D5		4,00 x M20
E		52,00 mm
F		5,00 mm



Wiring diagram

CA11.A292.PF1




Switch program

CA11.A292.PF1



Kraus & Naimer


CA11
A292
Page 1 of 1

Face Plate													
													
		1	3	5	7	9	11	13	15	17	19	21	23
  													
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16	18	20	22	24
0	270												
	285												
	300												
	315												
	330												
	345												
1	0												
	15												
	30												
	45												
	60												
	75												
	90												
	105												
	120												
	135												
	150												
	165												
	180												
	195												
	210												
	225												
	240												
	255												

Version: 86

Face plate

S1.F456/C10.V11H

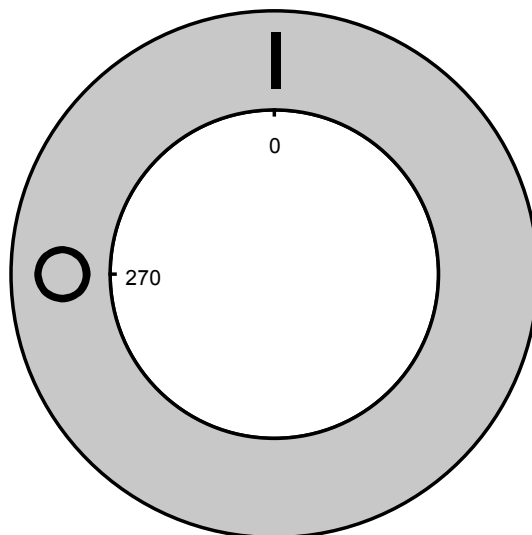



Sample image

PADLOCK DEVICE with F-handle ring

Designation: S1.V840G/D61/C1


Colour of F-handle ring: "D" red

Colour of face ring: "6" yellow

Locking position: "1" at 09:00 (1x90°)

Type of mounting: "C" for type of mounting PN, PF, PFA-PFF

Switch type: "1" for C-switches and for KG10.

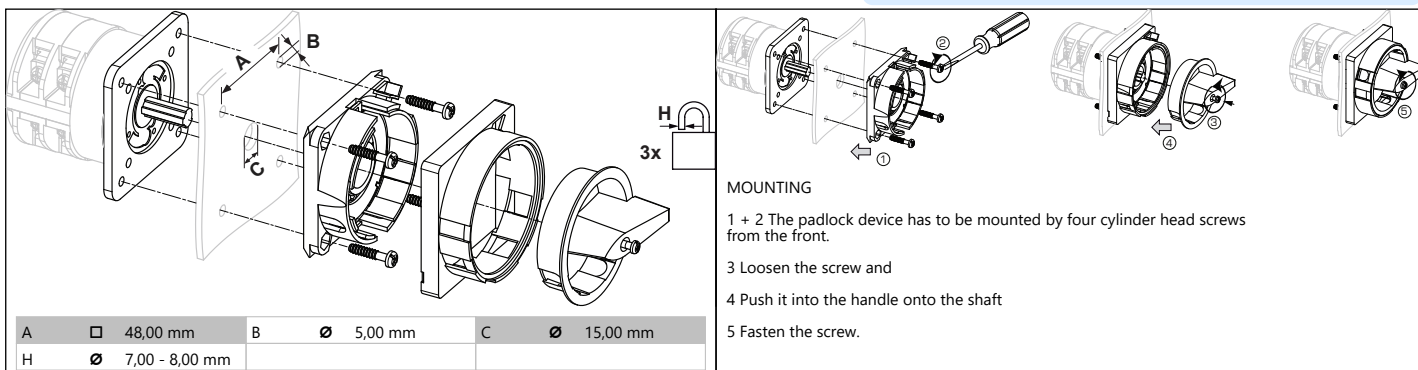


MOUNTING

1 + 2 The padlock device has to be mounted by four cylinder head screws from the front.

3 Loosen the screw and

4 Push it into the handle onto the shaft

5 Fasten the screw.

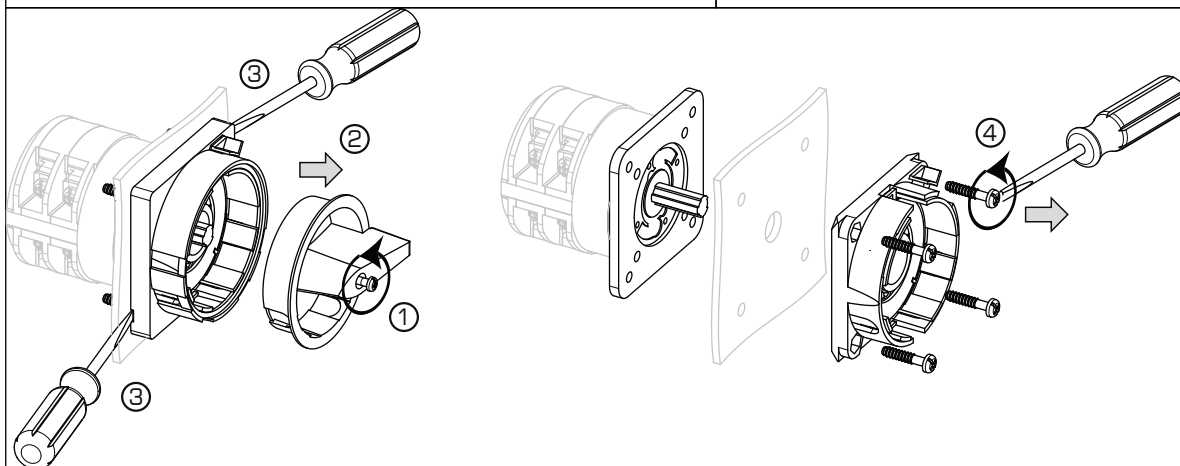

1 Loose handle screw

2 remove handle.

3 Insert a proper auxiliary tool at those points of the frame of the device which are marked by a screw driver on the drawing and remove the frame.

4 Fixing screws can be loosen now.