



Sample image

Datasheet

Article number: 70004791

Designation: CA11.A292.PN1

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
690 AC / DC						
Rated uninterrupted current Iu/Ith						
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements			
20	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C			
Rated operational current Ie						
Utilization category		Voltage (V)		Current (A)		
AC-15		220 - 240		6		
AC-15		380 - 440		4		
Rated operational power						
Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)		
AC-3	220 - 240	3	3	3		
AC-3	380 - 440	3	3	5,50		
AC-3	660 - 690	3	3	5,50		
AC-3	220 - 240	1	2	2,20		
AC-3	380 - 440	1	2	3		
AC-23A	220 - 240	3	3	3,70		
AC-23A	380 - 440	3	3	7,50		
AC-23A	660 - 690	3	3	7,50		
AC-23A	220 - 240	1	2	2,50		
AC-23A	380 - 440	1	2	3,70		
Max Fuse Rating IEC						
Fuse characteristic		No. of Fuses		Current (A)		
gG		1		25		
UL60947-4-1 , UL508						
Nominal Voltage						
Voltage (V) AC / DC						
600 AC						
Rated insulation voltage Ui						
Voltage (V) AC / DC						
600 AC						
Rated thermal current						
Current (A)		Ambient temperature (°C) Additional Text				
20		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
Reversing		110 - 120	1	2	0,17	40
Reversing		220 - 240	1	2	0,50	40
Reversing		277 - 277	1	2	0,60	40
Reversing		415 - 415	1	2	1	40
Reversing		440 - 480	1	2	1,50	40
Reversing		550 - 600	1	2	1,50	40
Reversing		110 - 120	3	3	0,50	40
Reversing		220 - 240	3	3	1	40
Reversing		415 - 415	3	3	2	40
Reversing		440 - 480	3	3	3	40
Reversing		550 - 600	3	3	3	40
DOL		110 - 120	1	2	0,50	40
DOL		220 - 240	1	2	1	40
DOL		277 - 277	1	2	2	40
DOL		440 - 480	1	2	2	40
DOL		550 - 600	1	2	2	40
DOL		110 - 120	3	3	1,50	40
DOL		220 - 240	3	3	3	40
DOL		415 - 415	3	3	5	40
DOL		440 - 480	3	3	5	40
DOL		550 - 600	3	3	5	40

Pilot duty rating code								
<i>Duty Code</i>								
A600								
SCCR / Max. fuse rating								
<i>Conditions of acceptability</i>								
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnect are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.								
Temp. rating of wire								
<i>Temperature rating (°C)</i>			<i>Current (A) Text</i>					
60 - 75			– Use copper wire only					
Connecting instructions								
<i>Markings</i>								
When intended for use as a motor disconnect the device shall be provided with a method of being locked in the OFF-position.								
General Use								
<i>AC / DC</i>	<i>Voltage (V)</i>	<i>Current (A)</i>	<i>No. of phases</i>	<i>No. of poles</i>	<i>No. of contacts in series</i>			
AC	600	20	1	2	1			
AC	600	20	3	3	1			
CSA								
Nominal Voltage								
			<i>Voltage (V) AC / DC</i>					
			600 AC					
Rated insulation voltage Ui								
			<i>Voltage (V) AC / DC</i>					
			600 AC					
Rated thermal current								
		<i>Current (A)</i>	<i>Ambient temperature (°C)</i>		<i>Additional Text</i>			
		20	0 - 40		–			
Horsepower rating								
<i>Across-the-Line Motor Starting</i>				<i>Voltage (V)</i>	<i>No. of phases</i>	<i>No. of poles</i>	<i>Power (HP)</i>	<i>Ambient temperature [°C]</i>
DOL				110 - 120	1	2	0,50	40
DOL				220 - 240	1	2	1	40
DOL				277 - 277	1	2	2	40
DOL				415 - 415	1	2	2	40
DOL				440 - 480	1	2	2	40
DOL				550 - 600	1	2	2	40
DOL				110 - 120	3	3	1,50	40
DOL				220 - 240	3	3	3	40
DOL				415 - 415	3	3	5	40
DOL				440 - 480	3	3	5	40
DOL				550 - 600	3	3	5	40
Pilot duty rating code								
<i>Duty Code</i>								
A600								
Temp. rating of wire								
			<i>Temperature rating (°C)</i>		<i>Current (A) Text</i>			
			75		– only			
General Use								
<i>AC / DC</i>	<i>Voltage (V)</i>	<i>Current (A)</i>	<i>No. of phases</i>	<i>No. of poles</i>	<i>No. of contacts in series</i>			
AC	600	20	1	1	1			
GENERAL TECHNICAL INFORMATION								
Tightening torque of screws								
			<i>tightening torque (Nm)</i>			<i>tightening torque (lb-in)</i>		
			0,60			5		
Stripping length								
			<i>Length (mm) –</i>					
			8 STRIPPINGLENGTH					
Size of conductor								
<i>composition of conductor</i>		<i>Min. / Max. value</i>		<i>No. of conductor per terminal</i>		<i>Cross section (mm²) or (AWG/kcmil)</i>		<i>Material of the wire</i>
solid wire		Min.		1		0.5mm²		Copper
solid wire		Min.		2		0.5mm²		Copper
flexible wire		Min.		1		0.75mm²		Copper
flexible wire		Min.		2		0.75mm²		Copper
flexible wire		Max.		2		2.5mm²		Copper
flexible wire		Max.		2		AWG 14		Copper
Single-core or stranded wire		Max.		2		AWG 12		Copper
Single-core or stranded wire		Max.		2		2.5mm²		Copper
flexible wire with ferrule according to DIN 46228		Min.		1		0.5mm²		Copper
flexible wire with ferrule according to DIN 46228		Max.		2		2.5mm²		Copper
flexible wire with ferrule according to DIN 46228		Min.		2		0.5mm²		Copper
Approbations								
<i>Specification</i>								
<i>Marking</i>								
EAC								
CE marking								

Approbations	
Specification	Marking
UK Directives	UK CA
CSA C.22.2 No.14	CSA®


Recommended screw driver	
Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x4

General Information	
Text	
- Do not lubricate or treat contacts. - Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology. - Use copper wire only. Do not coat the wire end with tin. - Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications. - After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.	

Waste Electrical & Electronic Equipment (WEEE)	
Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65	
Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge
Classification Contact Mat: Silver
Classification Terminal: Screw terminal

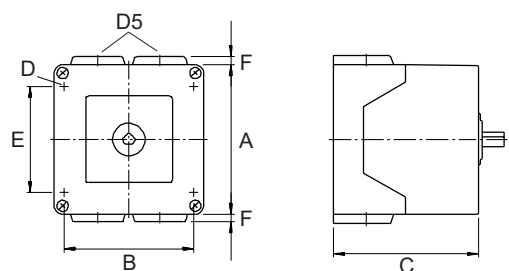Mounting-PN1			
			
IP - Code front side		IP42	
Stages		1,00 - 2,00	
A	□	82,00 mm	
B	H	68,00 mm	
C	H	59,70 mm	
D	Ø	4,40 mm	
D5	Ø	4,00 x M20	
E	H	52,00 mm	
F	H	5,00 mm	



Wiring diagram

CA11.A292.PN1



Switch program

CA11.A292.PN1



Kraus & Naimer


CA11
A292
Page 1 of 1

Face Plate													
													
		1	3	5	7	9	11	13	15	17	19	21	23
  													
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16	18	20	22	24
0	270												
	285												
1	300												
	315												
	330												
	345												
	0												
	15												
	30												
	45												
	60												
	75												
	90												
	105												
120													
135													
150													
165													
180													
195													
210													
225													
240													
255													

Version: 86

Face plate

S1.F056/A10.PNL

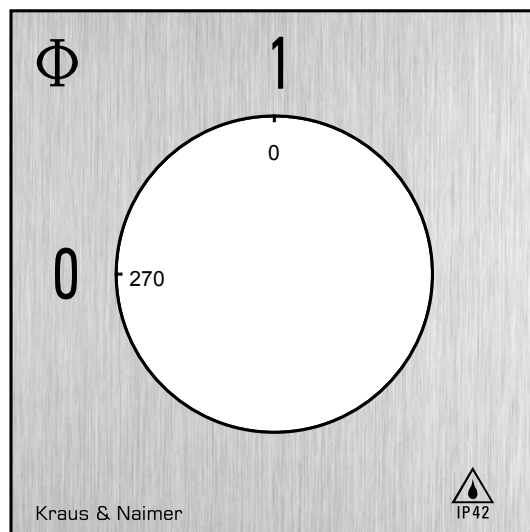

HANDLES

Designation: S1B.G257

Handle colour: "7" electro grey

