

Sample image

Datasheet

Article number: 70012785

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107				
Номинальное напряжение изоляции Ui				
Напряжение (В) Переменный ток/Постоянный ток				
690 AC				
Номинальный длительный ток Iu/Ith				
Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования	
100	50	55	Средняя температура окружающей среды +50°С в течение 24 часов с максимальным значением +55°С	
Номинальный рабочий ток Ie				
Категория применения		Напряжение (диапазон) (В)		Сила тока (А)
AC-32A		20 - 400		100
Номинальная рабочая мощность				
Категория применения	Напряжение (диапазон) (В)		Количество фаз	Количество полюсов
AC-3	220 - 240		3	3
AC-3	380 - 440		3	3
AC-3	660 - 690		3	3
AC-23A	220 - 240		3	3
AC-23A	380 - 440		3	3
AC-23A	660 - 690		3	3
Максимальный номинал предохранителя по IEC				
Характеристика предохранителя		Количество предохранителей		Сила тока (А)
gG		1		100
UL60947-4-1 , UL508				
Nominal Voltage				
Voltage (V) AC / DC				
600 AC				
Номинальное напряжение изоляции Ui				
Напряжение (В) Переменный ток/Постоянный ток				
600 AC				
Rated thermal current				
Current (A)		Ambient temperature (°C)		Additional Text
100		0 - 40		--
Horsepower rating				
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles
DOL		110 - 120	1	2
DOL		220 - 240	1	2
DOL		277 - 277	1	2
DOL		415 - 415	1	2
DOL		440 - 480	1	2
DOL		550 - 600	1	2
DOL		110 - 120	3	3
DOL		220 - 240	3	3
DOL		415 - 415	3	3
DOL		440 - 480	3	3
DOL		550 - 600	3	3
SCCR / Max. fuse rating				
Conditions of acceptability				
These devices are suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses or Circuit Breaker Type SFHA36AT0250, manufactured by General Electric.				
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by Class J fuses, 100A max.				
Temp. rating of wire				
Temperature rating (°C)		Current (A)		Text
75		--		--
Connecting instructions				
Markings				
Break all lines.				
General Use				
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles
AC	277	100	1	1
AC	600	100	1	2
No. of contacts in series				
1				

General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	600	100	3	3	1	
Общая информация						
Текст						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
				Voltage (V)	AC / DC	
				600	AC	
Номинальное напряжение изоляции Ui						
				Напряжение (В)	Переменный ток/Постоянный ток	
				600	AC	
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		100	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting				Voltage (V)	No. of phases	No. of poles
				110 - 120	1	2
				220 - 240	1	2
				277 - 277	1	2
				415 - 415	1	2
				440 - 480	1	2
				550 - 600	1	2
				110 - 120	3	3
				220 - 240	3	3
				415 - 415	3	3
				440 - 480	3	3
				550 - 600	3	3

Общая информация

- Текст**
- Не смазывайте и не разбирайте контакты.
 - Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
 - Используйте только медные провода. Не покрывать конец провода оловом.
 - Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-VE2

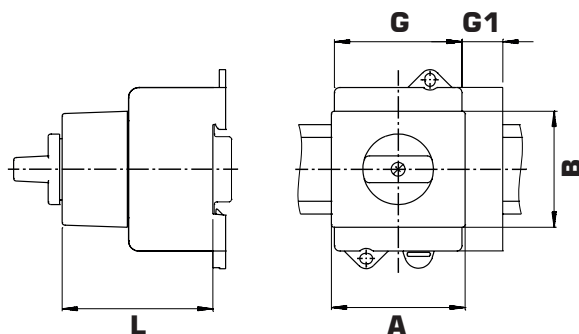

IP - Код лицевая сторона	IP20
Stages	2,00 - 5,00
A	H 70,00 mm
B	H 45,00 mm
G	H 70,00 mm
G1	H 22,00 mm
L	H 65,00 mm



Wiring diagram

KG100.T303.VE2



Switch program

KG100.T303.VE2



Kraus & Naimer


KG100	T303	VE	Page 1 of 1
--------------	-------------	-----------	--------------------

Face Plate									
	1	L1	L2	L3					
	0	1	3	5	7	9	11	13	15
									
Switching Angle	90	2	4	6	8	10	12	14	16
Total switching Angle	90	T1	T2	T3					
0	270								
1	0	■	■	■					
	90								
	180								

Version: 102

Face plate

K2.F456/C10.VE2

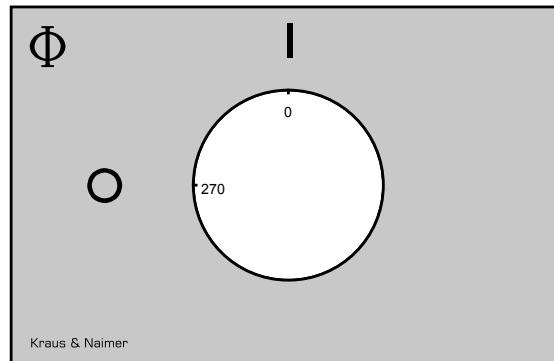

PADLOCK DEVICE

with type F-handle for type of mounting VE2 and VE21

Designation: S0.V840B/E7D

Lock bow diameter: "E" for lock bow diameter 4,5-6mm

Colour of handle: "7" electro-grey, locking bar flag red

Type of mounting: "D" for type of mounting VE2 - for KA40-KA63B, KG20A/KG32A, KG41-KG64B, KG80/KG100 and KH(R)16-KH(R)80

