

# TIMEGUARD®

## 360° Flush Mount PIR Presence Detector With Optional Absence Detection



Model: PDFM361AB  
(1 Channel)



Model: PDFM362AB  
(2 Channel)

Installation & Operating Instructions

# 1. General Information

These instructions should be read carefully and retained for further reference and maintenance.

**Note:** Timeguard reserve the right to alter these instructions at any time. Up to date instructions will always be available for download at [www.timeguard.com](http://www.timeguard.com)

## 2. Safety

- Before installation or maintenance, ensure the mains supply to the PIR is switched off and the circuit supply fuses are removed or the circuit breaker turned off.
- It is recommended that a qualified electrician is consulted or used for the installation of this PIR and install in accordance with the current IEE wiring and Building Regulations.
- Check that the total load on the circuit including when this PIR is fitted does not exceed the rating of the circuit cable, fuse or circuit breaker.
- To clean use a clean dry cloth only. Do not use liquid cleaners.

1

## 3. Technical Specifications

• Mains Supply:	220-240V AC 50Hz
• Class Protection:	Class II
• IP Rating:	IP20
• Operating Temperature:	-20° to 40°C
• PIR Detection Range:	up to 8m at a 2.5m mounting height
• Detection Angle:	360°

2

- Time ON Adjustment: 30sec - 30min  
60 Minutes with optional remote control IR10AB
- (LUX) level adjustment: 10 - 2000
- Manual Override: Yes
- Load 1 for Lighting: 2200W Incandescent  
2200W Halogen  
1200VA/140uF Fluorescent  
800VA/600W LED
- Load 2 for HVAC: Voltage free contacts:  
Max 5A for 230V AC  
or 30V DC (resistive)  
73W Motor

**Note: Only PDFM362AB supports 2 channel.**



**Note: Absence mode can only be triggered via using the IR10AB remote control. (Sold Separately). A push switch is required for absence mode to work on the PIR.**

- Modes: Presence / Absence
- Modes: Presence / Absence
- CE Compliant
- EC Directives: Conforms to the latest directives
- Construction: Polycarbonate
- Dimensions (H x W x D): 105mm x 105mm x 67mm
- PIR Ceiling Projection: 23.5mm

**If a 2 channel surface PIR is required, model number PDSMSB (Surface Mount Box), along with PDFM362AB (2 Channel Flush Mount PIR) can be combined to work as a 2 channel surface mount PIR. The flush and surface base plates are interchangeable. PDSMSB (Sold Separately)**

## 4. Selecting a location

- The PIR has a number of detection zones at various horizontal and vertical angles as shown below.

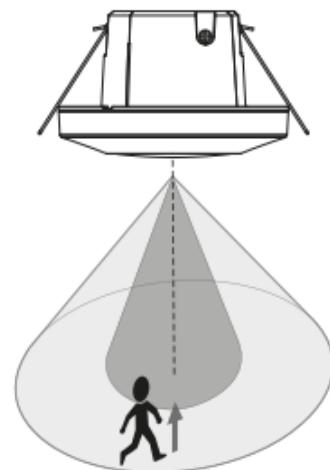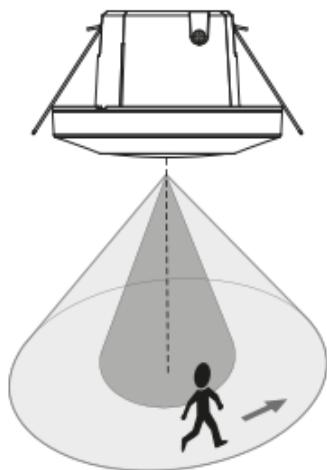


3

- A moving human body or object needs to cross one of these zones to activate the sensor. The optimum height for this is between 2m - 2.5m mounting height. Careful positioning of the luminaire is required to ensure the best performance from the PIR and the appointed approach path.
- Avoid positioning the PIR near any sources of heat in and around the detection area such as extractor fans, tumble dryers or boiler exhausts etc. This would also include other light sources such as security lights.
- Reflective surfaces (i.e. pools of water, white painted walls, overhanging branches and other types of foliage) may cause false activation under heightened weather conditions.


- During extreme weather conditions the PIR may exhibit unusual behaviour if placed in sight of a window. Once normal weather resumes, the PIR will carryout normal operations.

## 5. Installation

- Ensure the mains supply is switched off and the circuit supply fuses are removed or the circuit breaker turned off.
- An isolating switch should be installed to enable the power to be switched ON and OFF to the PIR. This allows the unit to be easily switched OFF for maintenance purposes.

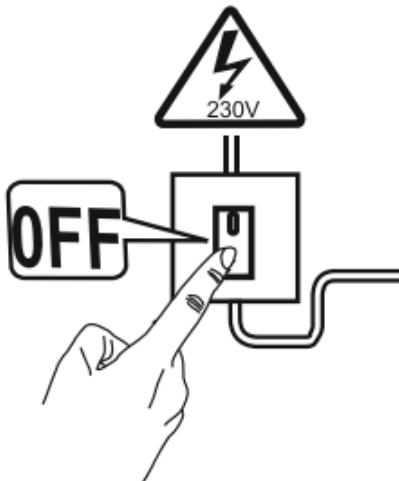


- Mark the position of the 68mm diameter hole cut out, taking care to avoid ceiling joists and other obstructions within the position the hole cut out will be placed.
- Drill a pilot hole to take the centre shaft of the hole cutter.
- Use the hole cutter to cut the required hole.
- Pass the 230V 50Hz mains supply and load cables through the hole and prepare for termination

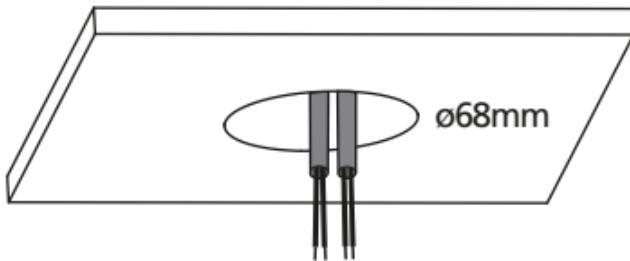

- Unscrew the side on door entry access points on the base plate of the PIR and open it. Locate the terminal connections and terminate the cables into the terminal block ensuring that the correct polarity is observed and that all bare conductors are sleeved. (See Section 6. Connection Diagram)
- When wiring is complete, close the door entry access points to clamp the cable securely into place. Tighten the screws to the door entry points and ensure not to over tighten.


5

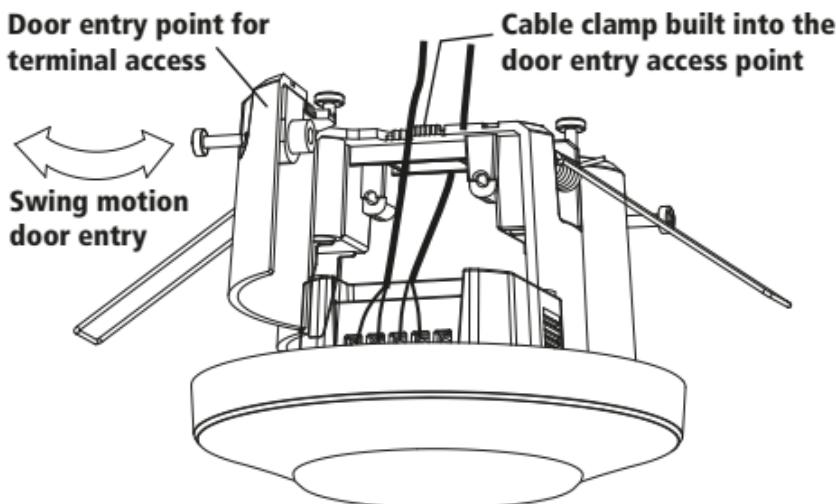


- Fit the PIR into the hole cut out previously cut until the springs flick out and secure the body to the ceiling.

# 6. Connection Diagram

## PDFM362AB

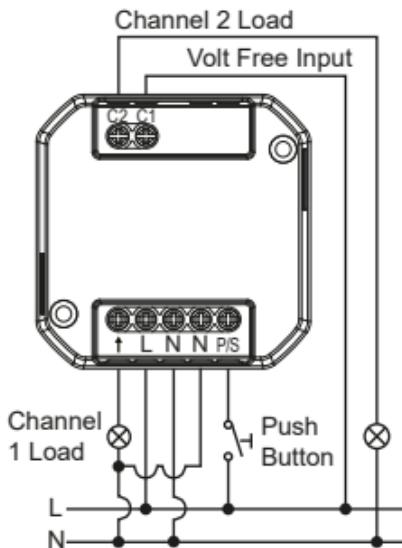

## PDFM361AB

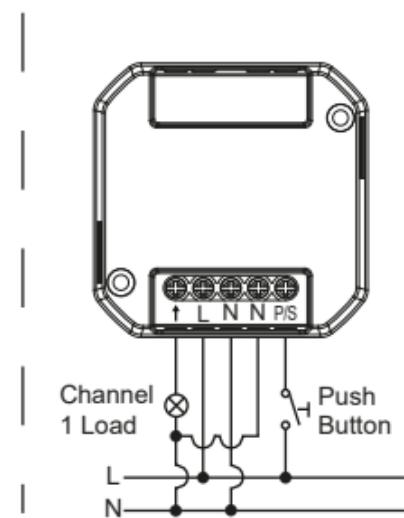

6

### PDFM361AB: Wiring Configuration

#### 230V AC 50Hz Mains Supply

Live (Brown or Red) to L

Neutral (Blue or Black to N

#### Load

Switched Live

(Brown or Red) to ↑

Neutral (Blue or Black to N

### PDFM362AB: Wiring Configuration

#### Supply (Mains + Volt Free)

Channel 1: 230V AC 50Hz Only

Live (Brown or Red) to L

Neutral (Blue or Black to N

Channel 2: Volt Free Input to C1

(5-230V AC 50Hz or 5-30V DC  
5A MAX) or 73W Motor

#### Load

Switched Live Channel 1  
(Brown or Red) to ↑

Switched Live Channel 2

Volt Free Output to C2

(Terminal C2 will reflect the  
supply from terminal C1)

## 7.Commissioning and Operation

- Restore the power from the mains supply breaker or isolating switch and test for the correct operation.

### Walk Test Procedure

- Adjust the time dial (fully anti-clockwise), and the Lux dial should be set to the sun symbol for daylight/night operation for the purpose of the walk test.
- Allow the PIR to settle down if the attached load is switched on. This is called warm up mode and can take several minutes to switch off as long as there is nothing detected in the pickup area.
- Once the unit is in the OFF position walk across the detection area, when the PIR is triggered and the load will turn ON for the minimum set amount of time.
- Once you are happy with the pickup area of the PIR you can set the Lux dial in the anticlockwise direction to trigger when dusk is approaching. (This may be best performed in real time in the evening subject to the users preference).
- You can also adjust the time dial which will vary the timeout periods of the PIR once the pickup area is vacated of any movement.

7

## 8.Switching from Presence to to Absence mode

- The PIR will come pre-set to presence mode as standard, if you require an absence detector continue following this section. Note that a IR10AB remote will be required to change modes. Otherwise you can skip to section 9.

## Switching From Presence To Absence Mode:

- To switch the PIR from presence to absence mode, press the **lock/unlock** button and you will see 2 flashes from the LED receiver of the PIR, this indicates that the PIR is unlocked and ready to receive further instructions from the remote control. Next press the **Semi Auto** button on the **IR10AB** remote control. The LED receiver light will flash once for up to 2 seconds and disappear, this indicates that the PIR is now in **Semi Auto** (absence mode).
- When the PIR set to absence mode, the unit will not switch on automatically when someone walks in the detection area.
- The person in the room must press the retractable push button for the light to switch on. From this point onwards as long as detection in the area has constant movement, the PIR will continue to keep the luminaire or attached load switched on, until the subject has moved out of the detection area and the time delay function takes over.
- For example if set to 10 minutes the PIR will begin to countdown from this value once nothing is in the detection area. If a subject is detected the time delay will reset.

## Switching From Absence To Presence Mode:

- To switch the PIR from absence to presence mode, press the **lock/unlock** button and you will see 2 flashes from the LED receiver of the PIR. Next press the **Auto** button on the **IR10AB** remote control. The LED receiver light will flash twice and disappear, this indicates that the PIR is now in **Auto** (presence mode). There will be up to a 1 minute delay in changing modes where the PIR will not switch.

## 9. Optional Remote Control

- The IR10AB is an optional remote control that is sold separately. If absence detection is required the IR10AB will be needed to change modes over.



- LUX control adjustment.  
(Auto mode only).
- Time delay adjustment  
(up to 60 minutes  
Auto mode only).
- Independent channel control  
(PDFM362AB only).
- Sensitivity control.
- Manual override ON/OFF  
(10 hours).
- Learn mode: Set for a specific Lux level.
- Lock/Unlock PIR settings.
- Semi Auto mode: Absence
- Auto mode: Presence
- Pulse mode

## 10. Troubleshooting Guide

Problem	Cause/Solution
The luminaire does not switch on when in the detection area.	Bulb faulty or missing. Nearby light sources causing interference. Redirect the PIR or light source if possible.

Problem	Cause/Solution
False activation. (Luminaire switches on for no apparent reason)	Heat sources as described in section 4. Reflective surfaces described in section 4. Moving pedestrians, cars or animals in the area. Check the detection area. Nearby electromagnetic disturbance from a neighbouring circuit (CCTV interference).
Luminaire remains switched on	Continuous false activation resetting the delay time when an object is detected.
Luminaire switches on during daylight hours	Shadow casting over the PIR sensor Clouds creating a dark presence. Ensure the luminaire receives adequate daylight from all angles (not covered).

If you experience problems, do not immediately  
return the unit to the store.

Telephone the Timeguard Customer Helpline:

**HELPLINE**  
**01582 544 548**

or email [helpline@timeguard.com](mailto:helpline@timeguard.com)

Qualified Customer Support Coordinators will be online  
to assist in resolving your query.



**Deta Electrical Co Ltd**  
Panattoni Park, Luton Road,  
Chalton, Bedfordshire, LU4 9TT  
Sales Office: 020 8452 1112  
or email [csc@timeguard.com](mailto:csc@timeguard.com)

**[www.timeguard.com](http://www.timeguard.com)**