
# LEV71930

Microwave Sensor Remote Control for LEV71929
ToughLED™ Pro Microwave on/off Sensor

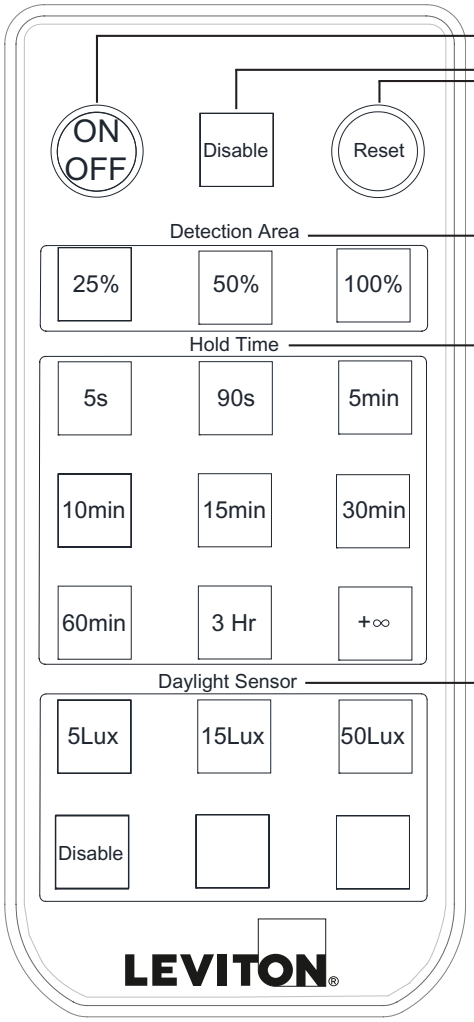


**ON/OFF button**
OFF mode : Turns the light off.
ON mode: Turns the light on, sensor starts work and the settings go to the last program setting.

**Disable button**
Disable mode : Turns off the sensor, light becomes a standard fitting. To reset, press ON/OFF button or switch off/on using wall switch

**Reset button**
Reset mode : Press once to reset the sensor back to DIP switch settings

**Detection Area**
Set up detection area: 25%/ 50%/ 100%

**Hold Time**
Set up hold time: 5sec/90sec/5min/10min/15min or 30min/60min/3Hr/+ ∞(infinity)
(Refers to the time period the luminaire remains at 100% illumination after no motion detected)

**Daylight Sensor**
Set up daylight threshold: 5lux/15lux/50lux/disable
(When set to 'Disable' mode, the sensor will switch on the luminaire when motion is detected regardless of ambient light levels.
The daylight sensor will only operate when the luminaire is off.)

## Sensor factory default settings:

DIP settings are: (Detection area:100%, Hold time: 5 secs, Daylight Sensor: Disabled)

Battery: 1 x 3V CR2025L

RoHS Compliant IP20 jcc.co.uk

V1_May_2022_RS

ISO9001 - 2015 - Registered Firm Certificate No. GB 1552
JCC Lighting Products Ltd. Lux Park, Chichester Business Park, City Fields Way, Tangmere, Chichester, West Sussex, PO20 2FT
**Technical Support: +44(0)1243 838986 Customer Services: +44(0)1243 838999**