

Ring Pendant Range

Installation guide for LED ring pendant

Important information

- It is recommended that luminaires are installed by a qualified electrician to ensure the installation complies with the local current wiring regulations.
- Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for claims arising from sub-standard installations.
- These products are designed for connection to a 200-240V~ 50Hz supply.
- The light source of this luminaire is not replaceable: When the light source reaches the end of its life, the whole of the luminaire must be replaced.
- It may be necessary to upgrade your MCBs to allow for increased inrush current.

INSTALLATION

ENGLISH


Specifications Ra: 80

Product code	Wattage	Colour Temp	Lumens	LpcW
JC96400	25W	4000K	2190	88
JC96401	25W	3000K	2130	85
JC96402	35W	4000K	3160	90
JC96403	35W	3000K	2900	83

Available finishes: Black only

200-240V~ 50Hz / Class I

Fig 4a.

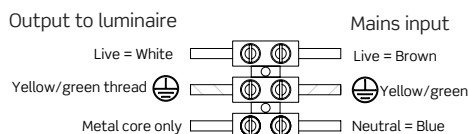

- Read instructions and check that you have all of the tools and accessories required to complete the installation correctly. Isolate power supply before starting the installation.
- Loosen screws to remove back plate and use as a template for fixing see Fig 1.
 - Adjust length of suspension cables to suit application. Remove excess suspension cable in mounting plate. (Do not coil excess and leave inside mounting plate).
 - Loosen cable retention screw and feed power cable through, ensuring power cable is clipped to adjacent suspension cable as shown in Fig 2.
 - When removing excess cable and re-connecting to terminal block note polarity as follows:
Live - White thread in inner core
Neutral - No thread (metal core only)
Earth - Yellow/green thread in inner core
 - Tighten cable clamp, see Fig 3 for reference.
 - Connect mains supply as per Fig 4a & 4b.
 - Fit mounting plate to mounting bracket as shown in Fig 5.
 - Turn on supply and test for operation.

Fig 1.

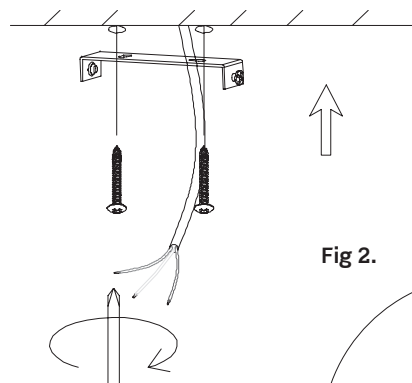


Fig 2.




Fig 3.

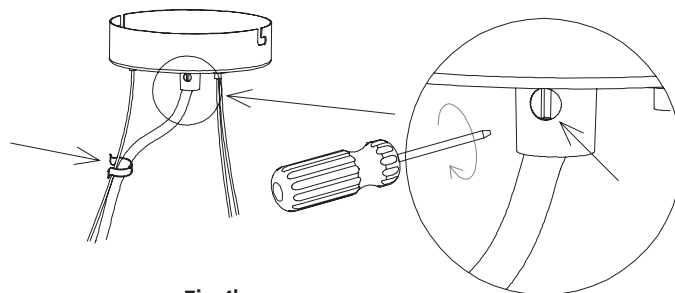


Fig 4b.









Fig 5.

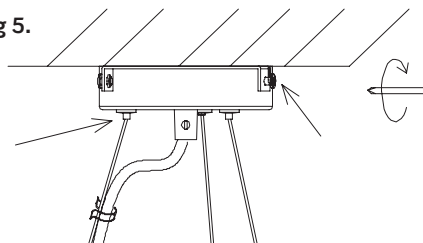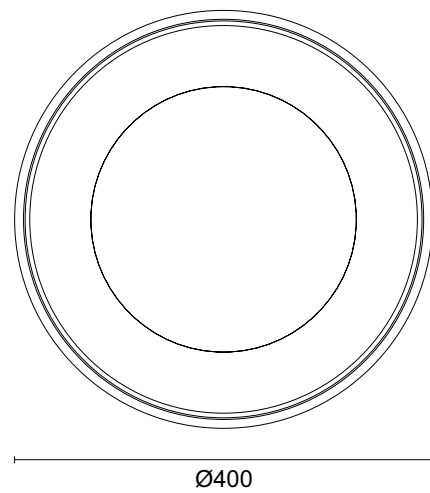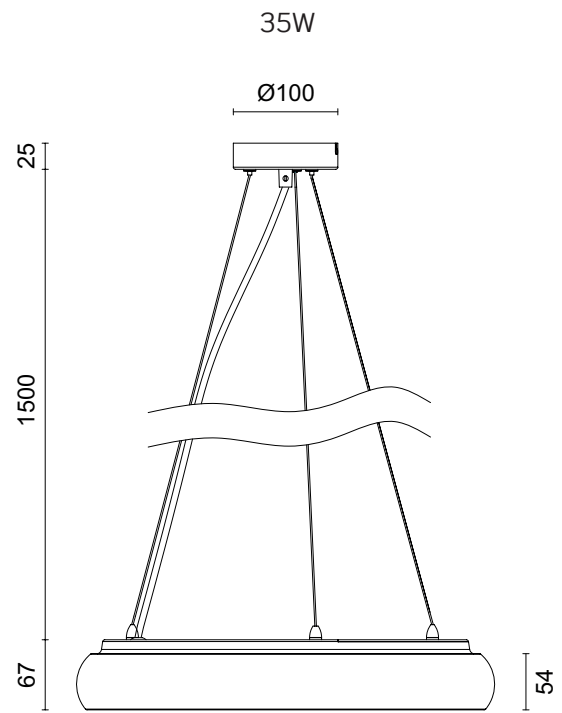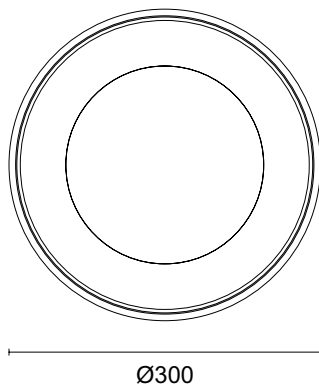

Profile & Dimensions

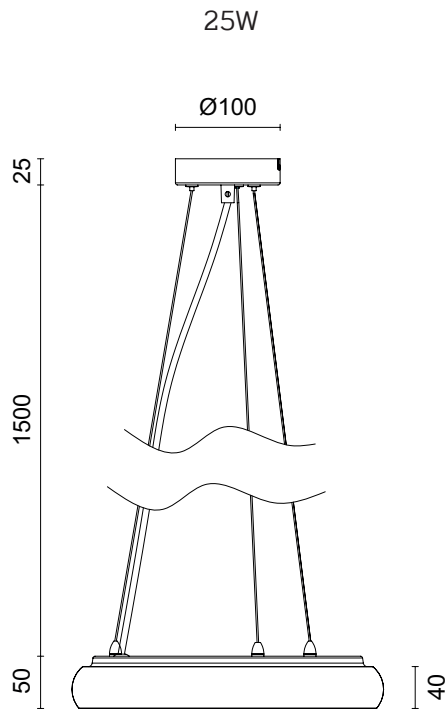

All dimensions in millimetres

Important warranty information

These luminaires are supported by a 5 year warranty; which must be registered online at jcc.co.uk/warranty.

The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis: Product Code/Batch Code.