

Please read these instructions before installation and retain for future reference

MAINLINE TRACK RANGE

JC14012

Pre-wired Track Adaptor

Available in: Black or White

240V 50Hz
5 Amp max

Maximum Weight
Loading: 0.5kg

Fig.1a


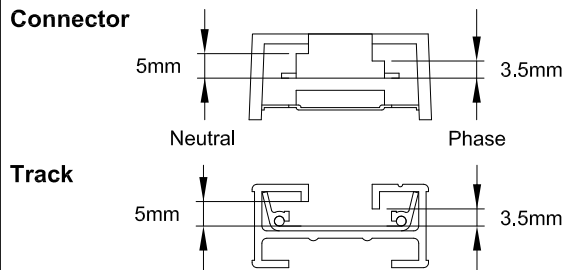


Fig.1b

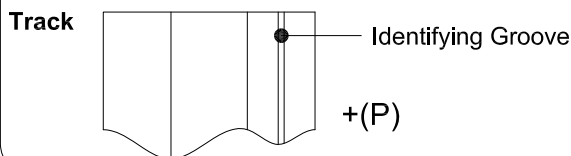

BS EN ISO9001 - 2008
Registered Firm Certificate No. GB 1552

Drg No. JC14012-IS Issue: B - 15.06.16 - KB

Important Information

It is recommended that luminaires are installed by a qualified electrician who should ensure that the installation complies with the current IEE wiring regulations BS7671: 2008. Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for any claims arising from a sub-standard installation. **Always switch off mains supply before fitting or servicing.**

Installation


Please note that both the internal profile of the track sections and the external profile of the connectors are asymmetrical: this feature has been incorporated to ensure the overall polarity of the system, i.e. phase can only be connected to phase and neutral will only connect to neutral (see Fig.1a.)

If you should experience any difficulties connecting Mainline components please check that they are correctly orientated. The phase side of the track can also be identified by the shallow groove running along its outer surface. This groove is a reference for the correct insertion of luminaires into the track during installation (see Fig.1b).


1. Connect the pendant to the cable on the Pre-wired adaptor ensuring the correct wires are connected to the Live(brown) Neutral(blue) and Earth(green) as illustrated in Fig.2.
3. Make sure the cable retaining screw is tightened (do not over tighten).
5. Ensure the pendant weighs no more than 0.5Kg as this is the maximum weight the adaptor can hold.
6. Fit the pendant into the track ensuring that the phase(+) indicated by the letter "P" on the track adaptor is aligned correctly with the phase side of the track.

The JC14012 is supplied as a Pre-wired Track Adaptor only.

Fig.2

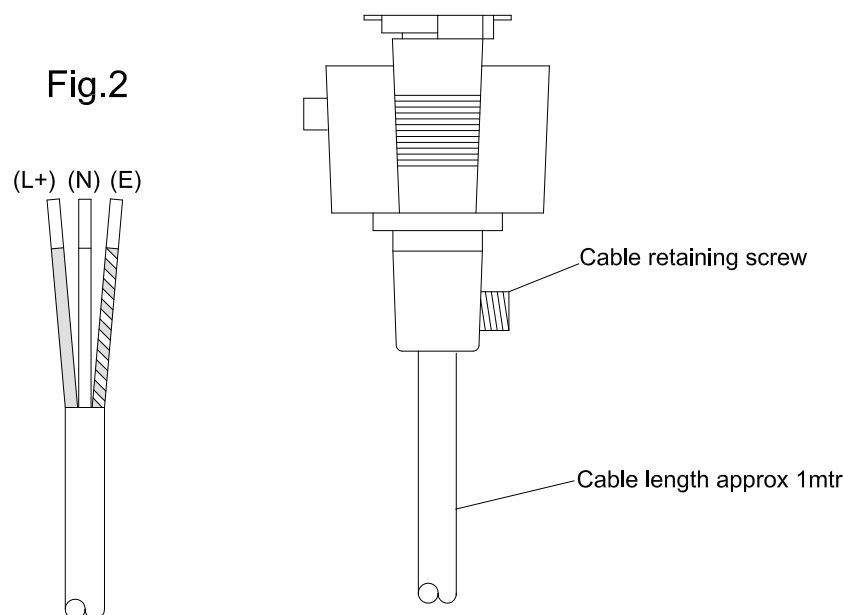

Profile & Dimensions

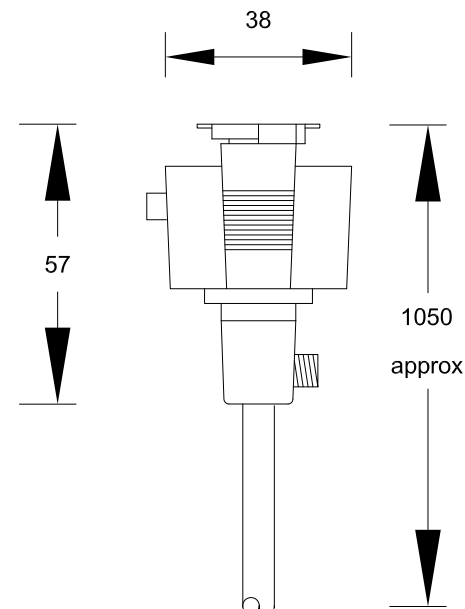

All dimensions in millimeters.

jcc.co.uk