


VIERPOLIGE VERDEELBLOK MET GETAPTE RAIL, 125 A

CATALOG NUMBER

TR-125A



CERTIFICATIONS



FEATURES

Easily clips onto DIN rail or mounts to panel with screws

Equipped with a current input plug

Bolts included for output connections

Transparent protection cover

Easy accessibility for wiring

Na uitpakken direct klaar voor gebruik, installatietijd en arbeid besparend

RoHS compliant

PRODUCTKENMERKEN

Article Number: 563150

Material: Copper;Glass Fibre Reinforced Polyamide;Plexiglass

Max Working Voltage, IEC (Ui): 1000

Peak Short Circuit Current (I_{pk}): 40kA

Short Term Withstand Current (I_{cw}) 1s: 8.4kA

Line Side Number of Connections: 1

Load Side Number of Connections: 5

Thread Size 1 (TS1): M5

Thread Size 2 (TS2): M6

Depth (D): 117 mm

Height (H): 126 mm

Width (W): 150 mm

Unit Weight: 0,68 kg

Flammability Rating: UL® 94V-0


Complies With: IEC® 60439.1; IEC® 61439.1; IEC® 60695-2-11 (Glow Wire Test 960 °C)

ADDITIONAL PRODUCT DETAILS

Thread Size 2 represents input plug.

Line side and load side number of connections are per pole.

DIAGRAMS

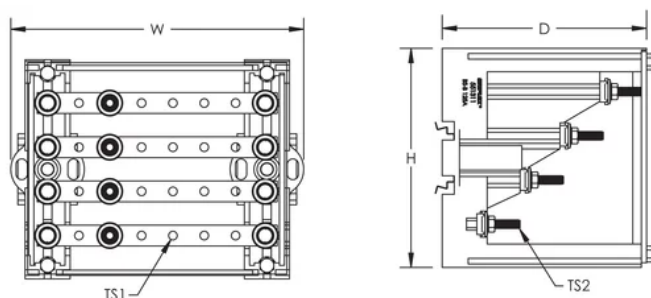

WAARSCHUWING

Producten van nVent moeten worden geïnstalleerd en gebruikt op de manier zoals is aangegeven in de nVent productinformatiebladen en trainingsmaterialen. U kunt de productinformatiebladen downloaden van www.nvent.com of opvragen bij uw nVent-klantenservice. Door onjuist installeren, verkeerd gebruik, verkeerde toepassing of enige andere handeling in strijd met de instructies en waarschuwingen van nVent kan het product mogelijk niet correct werken, ernstig of fataal letsel en materiële schade veroorzaken en/of uw garantie ongeldig maken.

Noord-Amerika

+1.800.753.9221

Option 1 – Customer Care

Option 2 – Technical Support

Europa

Netherlands:

+31 800-0200135

France:

+33 800 901 793

Europa

Germany:

800 1890272

Other Countries:

+31 13 5835404

APAC

Shanghai:

+ 86 21 2412 1618/19

Sydney:

+61 2 9751 8500



nVent.com

TRACER

Our powerful portfolio of brands:

CADDY ERICO HOFFMAN RAYCHEM SCHROFF