

# Product End of Life Instructions

## Plug-in kit, Compact NSX 100/160/250, 3 poles





## Potential disassembly risks

### **⚡ ⚠ DANGER**

#### HAZARD OF ELECTRIC SHOCK, EXPLOSION, OR ARC FLASH



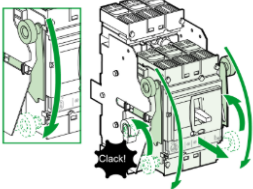
- Apply appropriate personal protective equipment (PPE) and follow safe electrical work practices. See NFPA 70E, CSA Z462, NOM-029-STPS, or local equivalent.
- This equipment must only be installed and serviced by qualified electrical personnel.
- The circuit breaker must be in the **O (OFF)** position.
- Do not use tools to disconnect or connect the circuit breaker.

**Failure to follow these instructions will result in death or serious injury.**






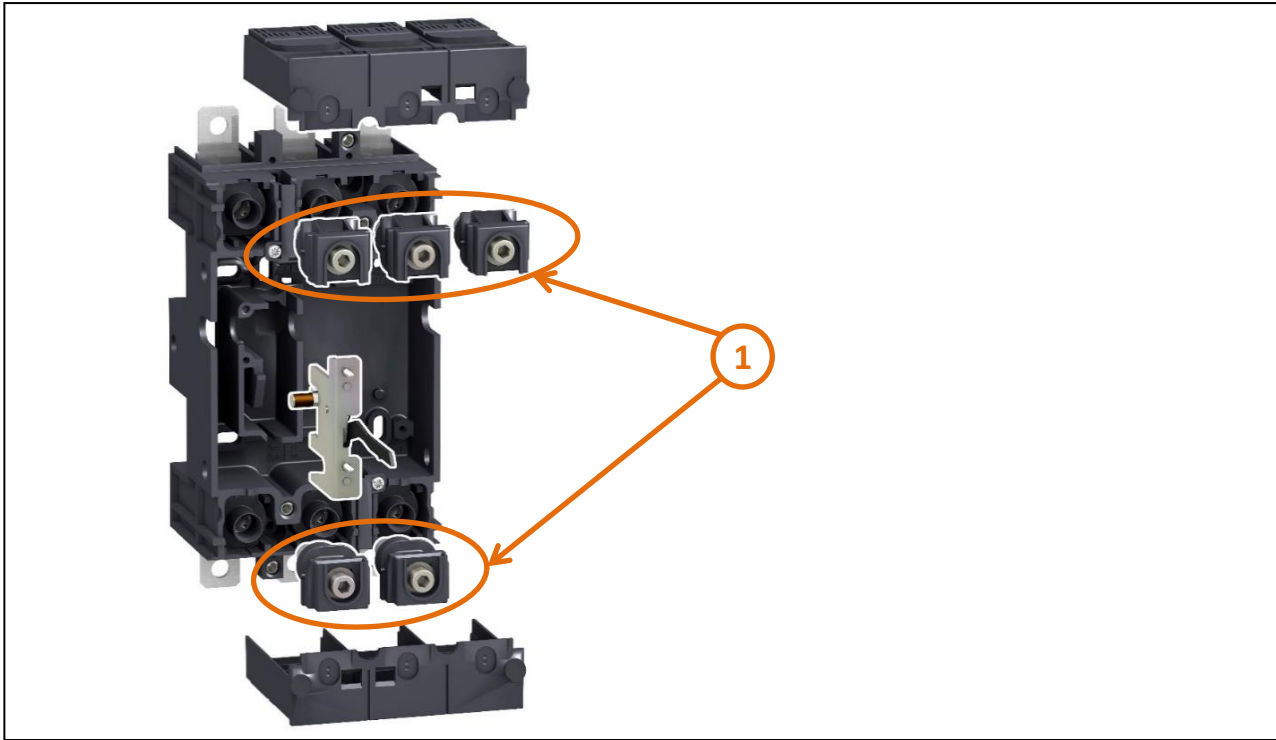
## End of Life Instructions

Follow this procedure to disconnect the circuit breaker:

Step	Action
1	 <p>Switch the circuit breaker to the <b>O (OFF)</b> position.</p>
2	 <p>Move both locking levers down as far as they can go.</p>
3	 <p>Push down both operating handles at the same time until you hear a double-click from the locking levers (as the locking levers return to their original position). The circuit breaker is disconnected.</p>

Follow this procedure to remove the circuit breaker:

Step	Action
1	 <p>Move both locking levers down.</p>
2	 <p>Push down both operating handles as far as the next notch.</p>
3	 <p>Remove the circuit breaker, keeping it horizontal.</p>



Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Plastic Part with Brominated Flame Retardant x 6	6 x 8,62	REAR CONNECTION SUPPORT

## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	This is a connection kit for 3P Compact NSX 100/160/250 fixed circuit breakers. A plug-in configuration is achieved by adding a plug-in kit to a fixed Compact NSX device. This kit includes a plug-in base (LV429266), 3 power connections (LV429268), 2 short terminal covers (LV429515) and a safety trip lock (LV429270). A plug-in configuration allows the circuit breaker to be quickly and easily installed or removed from its base. This operation can be carried out without connecting or disconnecting the power circuit.
Product reference	LV429289
Additional similar product references	LV429289 LV429290 LV429288 LV429291 LV429292 LV429306 LV429307
Total representative product mass	1528 g
Representative product dimensions	45mm x 80mm x 120mm
Accessories	No
Date of information release	06/2024

## Additional information

<p><b>Legal information</b></p>	<p>This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.</p>	
<p><b>In case of special transportation: transportation method</b></p>	<p>No</p>	
<p><b>Recyclability potential</b></p>	<p><b>68%</b></p>	<p>Recyclability rate has been calculated based on REEECY'LAB tool developed by Ecosystem, for components/materials not covered by the tool, data from the "ECO'DEEE recyclability and recoverability calculation method" was taken. If no data was found a conservative assumption was used (0% recyclability).</p>

Schneider Electric Industries SAS

Country Customer Care Center  
<http://www.se.com/contact>

35, rue Joseph Monier  
 CS 30323  
 F- 92500 Rueil Malmaison Cedex  
 RCS Nanterre 954 503 439  
 Capital social 928 298 512 €

[www.se.com](http://www.se.com)

ENVEOLI2405019

Published by Schneider Electric

© 2023 - Schneider Electric – All rights reserved

06/2024