



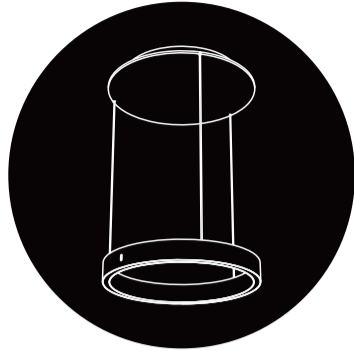

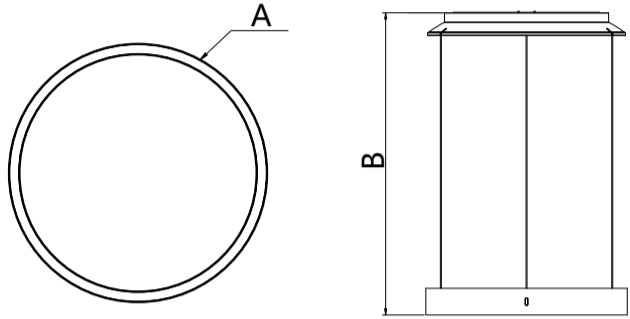

Item Code	Luminaire Description	CCT	kg
521026005900	LEDRingo SDL-S Sd-Rd600-75W-BLE2-BL	1200K-18000K	8.8kg
521026006000	LEDRingo SDL-S Sd-Rd400-53W-BLE2-BL	1200K-18000K	5.3kg


Model	A (mm)	B (mm)
LEDRingo Sd-Rd600-75W-BLE2-BL	φ600	600
LEDRingo Sd-Rd400-53W-BLE2-BL	φ400	600

Light Source


Product Code	Product Description	N	Light source code	QR Code	Energy Label
521026005900	LEDRingo SDL-S Sd-Rd600-75W-BLE2-BL	1	LS129007535-03		
521026006000	LEDRingo SDL-S Sd-Rd400-53W-BLE2-BL	1	LS129005335-03		

Installation


①

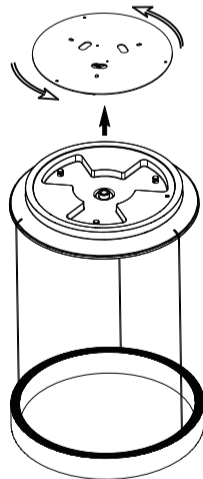


②

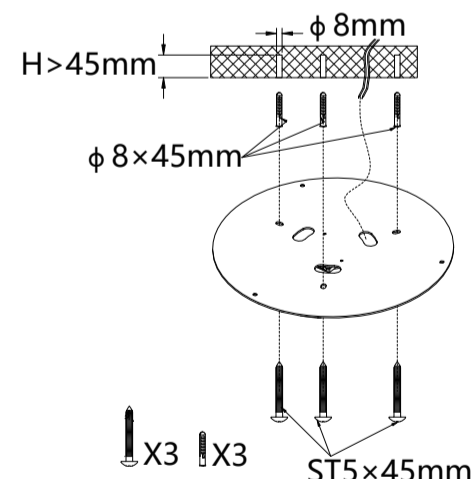


③

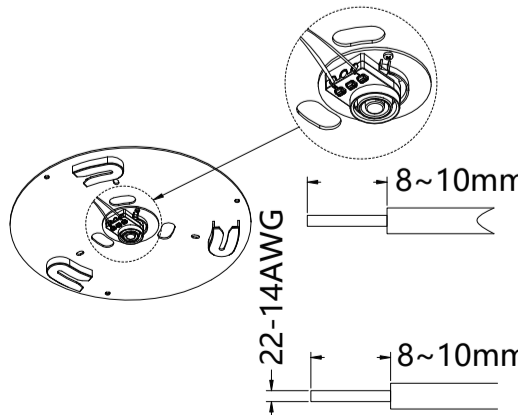


④

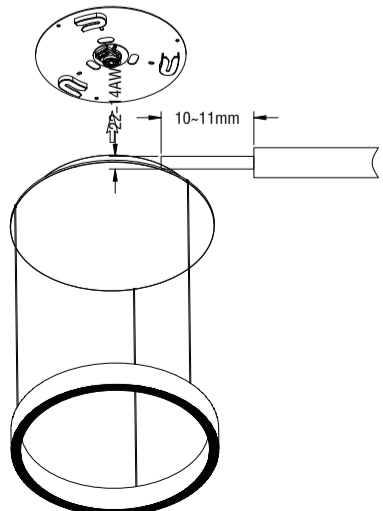


⑤

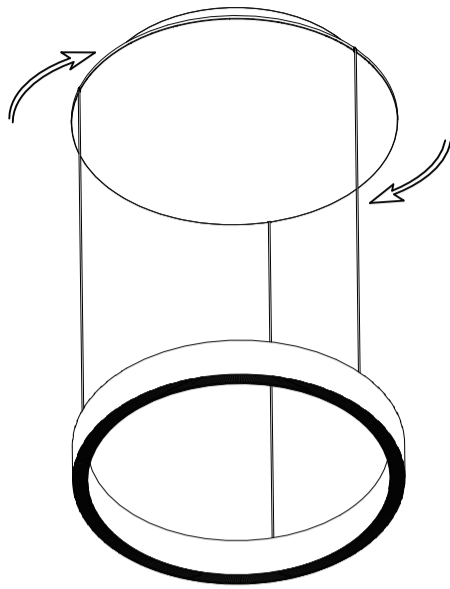

⑥

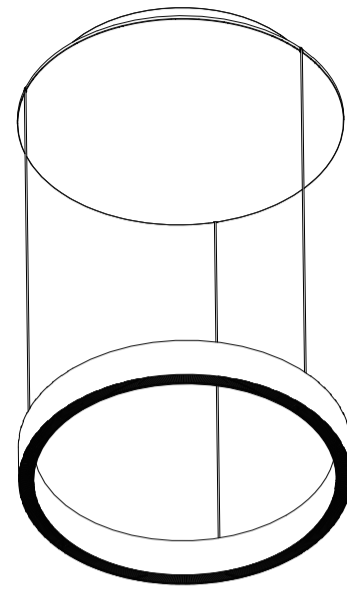


⑦

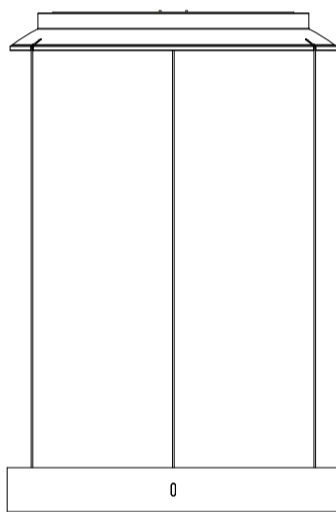

Gesture Control


Gesture control is enabled by default in supported fixtures but can be disabled in the Smart APP or Smart Web UI.

① Sensing Distance

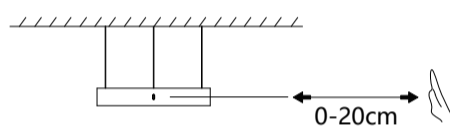


The gesture sensor works within 0-20 cm from the light.

② Lighting Mode

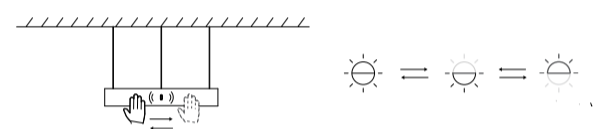


Wave your hand twice within 2 seconds to switch between direct or indirect light modes.

③ Turn On/Off

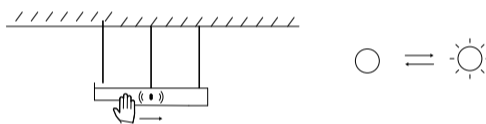


Wave your hand once to turn the light on or off.

④ Adjust Brightness

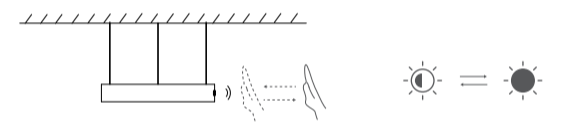


Move your hand closer to the light to dim it or farther away to brighten it. Stop moving your hand to maintain the brightness level.

⑤ Adjust Color Temperature(CCT)

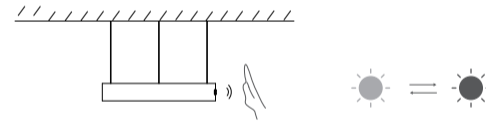

Hover your hand over the sensor to change the light's color temperature. Remove your hand to lock the current setting.

⑥ Adjust Suspended Height

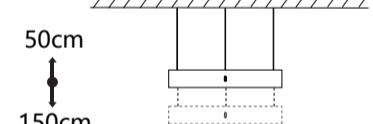

Hold the light with both hands and pull up or down to adjust its height. Adjustable range: 50cm to 150cm.




The light source in this luminaire is not user-replaceable. It must only be replaced by the manufacturer, an authorized service agent, or a similarly qualified professional.

Caution : Any operation is forbidden while power is on.

Indoor use only.

Ensure the luminaire is fully ceiling-mounted onto a solid, fire-resistant, and insulating surface. Avoid installing it on hollow or grid-like surfaces.

Ceiling luminaires, chandeliers, or other products exceeding 10 kg in weight must be installed on solid concrete ceilings. Use the provided screw accessory package for secure mounting.



Data subject to change
Les données sont sujettes à modifications
Änderungen vorbehalten

OPPLE Lighting Co., Ltd.
Room 411, Building 1 No. 6111,
Longdong Avenue, Pudong New District,
Shanghai City 201201, P. R. China
www.opple.com

Oppl Lighting B.V.
Meerenakkerweg 1-07
5652 AR Eindhoven
The Netherlands
service@opple.com