



Feature

- Touch sensitive
- Glass interface(White & Black)
- Control 4 zones synchronously and separately



Parameter


Remote

Part No.	Operation Voltage	Operation Frequency	DIMENSIONS ø/h (mm)	Remarks
860558	12-24VDC	434MHz/868MHz	86x86x29.1	Touch Sensor


Receiver

Part No.	Input Voltage	Current	Output	Remarks
860510	12-36VDC	4x5A	4x(60-180)W	Constant voltage
860500	12-36VDC	4x350mA	4x(4.2-12.6)W	Constant current
860505	12-36VDC	4x700mA	4x(8.4-25.2)W	Constant current


Product Size

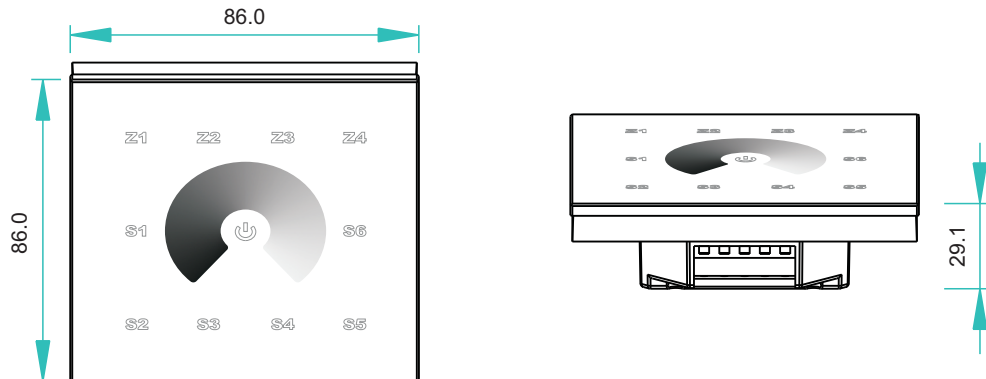

Installation

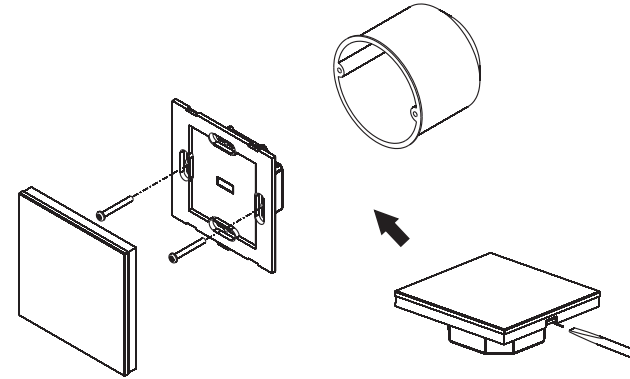


Button introduction

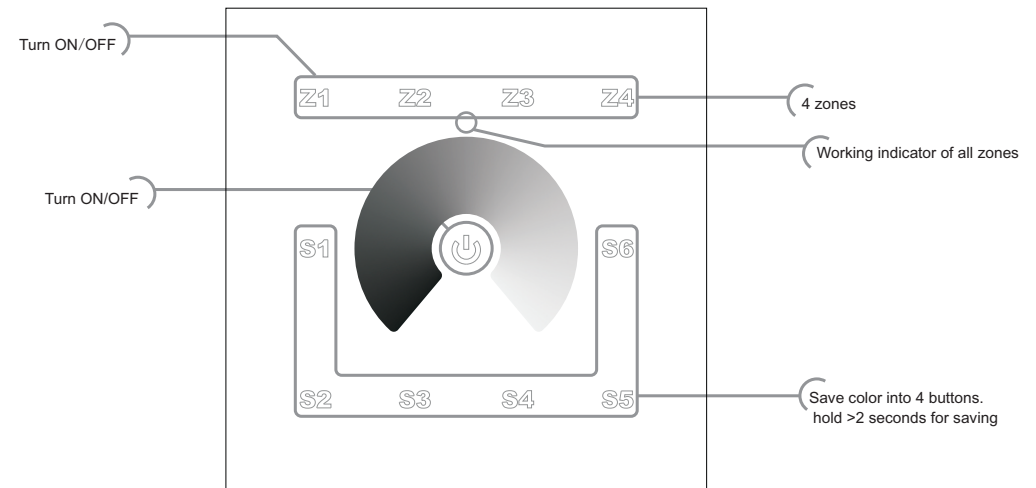


Note: All indicators are blue colors

Wiring diagram


1)Sender Connection Diagram

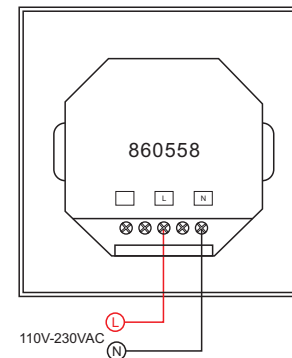

2)Receiver Connection Diagram for Single Unit

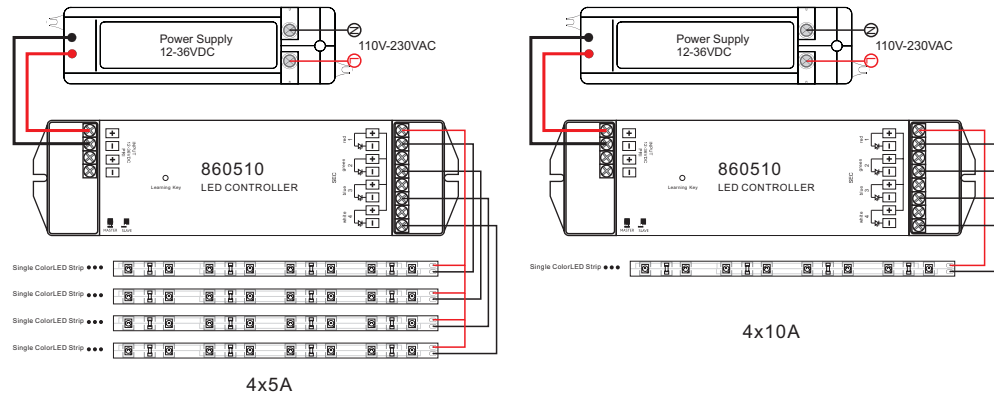

3)Receiver Connection Diagram for Multiple Units

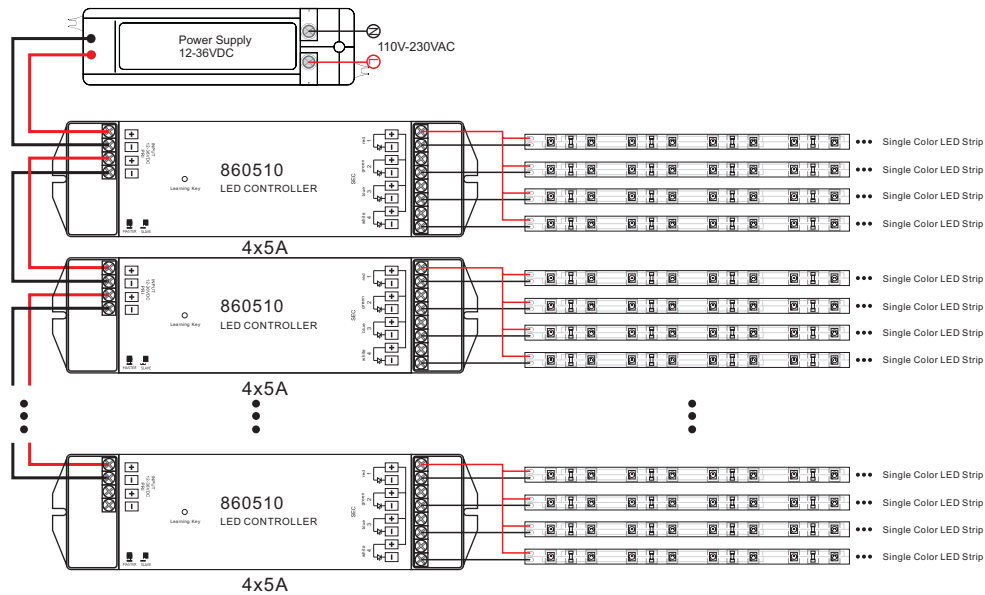

Operation

1. Learning:

- Click learning button on RF receiver→
- Short Touch a zone button 1, 2, 3 or 4 (sender)→
- Touch color wheel

Notice: Each sender can control 4 different zones separately, each zone can be learned endless receivers, so one sender can control as many receivers as you can.

2. Save:

- Long press a save button (S1, S2, S3, S4, S5 or S6) more than 2 sec to save all zones previous brightness.

Short press a save button to recall the brightness saved before.

Safety & Warnings

- 1) The product shall be installed and serviced by a qualified person.
- 2) IP20. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- 3) Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- 4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- 5) Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- 6) Please ensure that the cable is secured tightly in the connector
- 7) For update information please consult your supplier.

Warranty Agreement

- 1) We provide lifelong technical assistance with this product:

- 3-year warranty. We print date on every products, for example :1125 means year 2011, week 25. The warranty is for free repair or replacement and covers manufacturing faults only.

- For faults beyond the 3-year warranty we reserve the right to charge for time and parts.

- 2) Limited Warranty

- Any defects caused by wrong operation.
- Any damages caused by unauthorized removal, maintenance, modifying, incorrect connection and replacement of chips.
- Any damages due to transportation, vibration etc. after purchase.
- Any damages caused by earthquake, fire, lightning, pollution and abnormal voltage.
- Any damages caused by negligence, inappropriate storing at high temperatures and humidity or near harmful chemicals.
- Product has been updated

- 3) Repair or replacement as provided under this warranty is the exclusive remedy to the customer.