


KNX interfaces



Computer interface

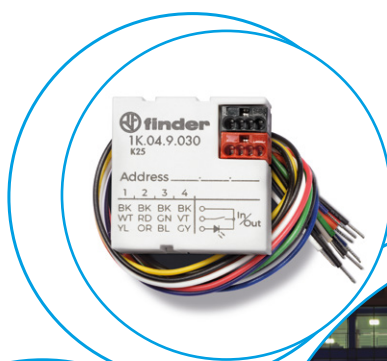

Dry contacts interface



Logic functions



Programming through ETS



KNX Universal interface

1K.02 - 2 input – 2 LEDs

1K.04 - 4 input – 4 LEDs

- Available with 2 or 4 inputs
- 8 advanced logic functions
- Compact size
- Status LED managing

1K.02 / 1K.04
KNX terminal



NEW 1K.02/04



Includes 2 digital inputs for dry contacts and 2 outputs for LEDs.

Device 1K.04.9030 includes 4 digital inputs for dry contacts and 4 outputs for LEDs.

These devices (only 34 x 34 x 11 mm) can also be used in installations where the inwall space available is reduced.

The digital inputs can interface sensors, traditional buttons, etc.

The low voltage output channels can drive LEDs for synoptic panels or switches

For outline drawing see page 6

Supply specification

Type of BUS

KNX

Supply voltage

V DC

30

Technical data

Logic functions

AND, OR, NOT, XOR, NOR, NAND, XNOR,
Byte to bit and bit to byte conversions,
1, 2 and 4 bytes threshold

Software compatibility

ETS 5 (or above)

Ambient temperature range

°C

–5...+45

Protection category

IP 40

Approvals (according to type)

—

KNX USB interface

1K.UB - USB interface for KNX BUS

- Standard KNX TP backbone
- USB type-B connector
- Compact size, one module wide
- LED indicating BUS status

1K.UB

KNX terminal



The modular USB Finder interface has 1 module DIN BAR-mounting size.

Thanks to it you can connect the PC through the USB port in order to manage your KNX system through the ETS software taking up the least possible space.

For outline drawing see page 6

Supply specification

Type of BUS		KNX
Supply voltage	V DC	30
Technical data		
Software compatibility		ETS 3 (or above)
Ambient temperature range	°C	-5...+45
Protection category		IP 40
Approvals (according to type)		—

Ordering information

Example: 1K Series, KNX universal interfaces with 2 IN / 2 OUT, in-wall mounting.

1

K

.

0

2

.

9

.

0

3

0

Series

Type

0 = Universal interface
U = Configuration interface

Nuber of inputs

2 = 2 IN / 2 OUT
4 = 4 IN / 4 OUT
B = USB

Supply version


9 = DC

Supply voltage


030 = KNX Bus

Wiring diagram

Type 1K.02




Type 1K.04



Wired cable

Type 1K.02 and 1K.04

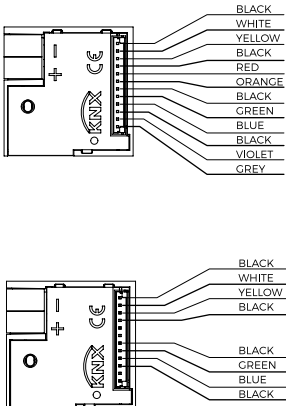


Wired cable for 1K.02.9030		
1.	BLACK	COM
2.	WHITE	INPUT 1
3.	YELLOW	OUTPUT 1
4.	BLACK	COM
5.	NOT CONNECTED	
6.	NOT CONNECTED	
7.	BLACK	COM
8.	GREEN	INPUT 3
9.	BLUE	OUTPUT 3
10.	BLACK	COM
11.	NOT CONNECTED	
12.	NOT CONNECTED	

Wired cable for 1K.04.9030		
1.	BLACK	COM
2.	WHITE	INPUT 1
3.	YELLOW	OUTPUT 1
4.	BLACK	COM
5.	RED	INPUT 2
6.	ORANGE	OUTPUT 2
7.	BLACK	COM
8.	GREEN	INPUT 3
9.	BLUE	OUTPUT 3
10.	BLACK	COM
11.	VIOLET	INPUT 4
12.	GRAY	OUTPUT 4

Outline drawings

Types 1K.02 / 04
KNX terminal



Type 1K.UB
KNX terminal

