# **SIEMENS**

Data sheet 3RU2116-1EJ0



Overload relay 2.8...4.0 A Thermal For motor protection Size S00, Class 10 Contactor mounting Main circuit: Ring cable lug Auxiliary circuit: ring cable lug Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S00
size of contactor can be combined company-specific	S00
power loss [W] for rated value of the current at AC in hot operating state	5.7 W
• per pole	1.9 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-40 +70 °C
<ul> <li>during storage</li> </ul>	-55 +80 °C
<ul> <li>during transport</li> </ul>	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current-dependent overload release	2.8 4 A
operating voltage	
rated value	690 V
<ul> <li>at AC-3e rated value maximum</li> </ul>	690 V
operating frequency rated value	50 60 Hz
operational current rated value	4 A
operational current at AC-3e at 400 V rated value	4 A

operating power	
• at AC-3	
— at 400 V rated value	1.5 kW
— at 500 V rated value	2.2 kW
— at 690 V rated value	3 kW
• at AC-3e	
— at 400 V rated value	1.5 kW
— at 500 V rated value	2.2 kW
— at 690 V rated value	3 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
● at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
● at 230 V	2 A
• at 400 V	1 A
operational current of auxiliary contacts at DC-13	
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
• at 125 V	0.22 A
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal
UL/CSA ratings	
full-load current (FLA) for 3-phase AC motor	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value	4 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	4 A 4 A
full-load current (FLA) for 3-phase AC motor • at 480 V rated value	
full-load current (FLA) for 3-phase AC motor • at 480 V rated value • at 600 V rated value	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch	
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required	4 A
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch	4 A
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required	4 A
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	4 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height	4 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth	4 A  fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals product component removable terminal for auxiliary	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring terminal lug connection
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit arrangement of electrical connectors for main current circuit tightening torque	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring terminal lug connection Top and bottom
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  arrangement of electrical connectors for main current circuit tightening torque  • for main contacts for ring cable lug	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring terminal lug connection Top and bottom  1.2 0.8 N·m
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit  • for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque  • for main contacts for ring cable lug • for auxiliary contacts for ring cable lug	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring terminal lug connection Top and bottom  1.2 0.8 N·m 0.8 1.2 N·m
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque  • for main contacts for ring cable lug • for auxiliary contacts for ring cable lug outer diameter of the usable ring cable lug maximum	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring terminal lug connection Top and bottom  1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit tightening torque  • for main contacts for ring cable lug outer diameter of the usable ring cable lug maximum design of screwdriver shaft	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring terminal lug connection Top and bottom  1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit • for auxiliary and control circuit arrangement of electrical connectors for main current circuit tightening torque  • for main contacts for ring cable lug • for auxiliary contacts for ring cable lug outer diameter of the usable ring cable lug maximum design of screwdriver shaft size of the screwdriver tip	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring terminal lug connection Top and bottom  1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm
full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position fastening method height width depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit type of electrical connection  • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit tightening torque  • for main contacts for ring cable lug outer diameter of the usable ring cable lug maximum design of screwdriver shaft	fuse gG: 6 A, quick: 10 A  any Contactor mounting 76 mm 45 mm 70 mm  No  Ring cable lug connection ring terminal lug connection Top and bottom  1.2 0.8 N·m 0.8 1.2 N·m 7.5 mm Diameter 5 6 mm

<ul> <li>of the auxiliary and control contacts</li> </ul>	M3
Safety related data	
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
MTTF with high demand rate	2 280 y
T1 value for proof test interval or service life according to IEC 61508	20 y
protection class IP on the front according to IEC 60529	IP00
Display	
display version for switching status	Slide switch

### Certificates/ approvals

#### **General Product Approval**

For use in hazardous locations





Confirmation







For use in hazardous locations

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping







Type Test Certificates/Test Report Special Test Certificate



## Marine / Shipping













other

Railway

Confirmation

Vibration and Shock

#### **Further information**

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2116-1EJ0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2116-1EJ0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1EJ0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax">http://www.automation.siemens.com/bilddb/cax</a> de.aspx?mlfb=3RU2116-1EJ0&lang=en


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RU2116-1EJ0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2116-1EJ0&objecttype=14&gridview=view1

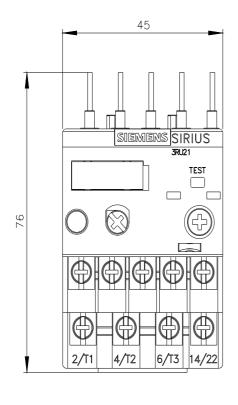

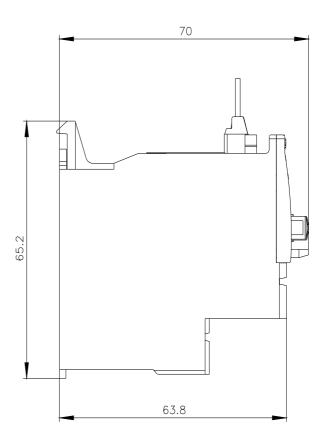

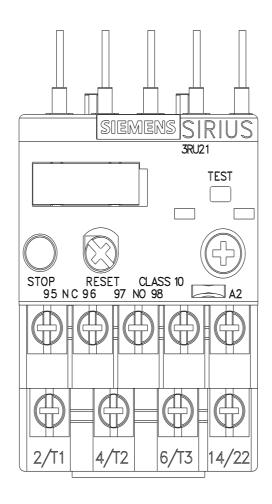

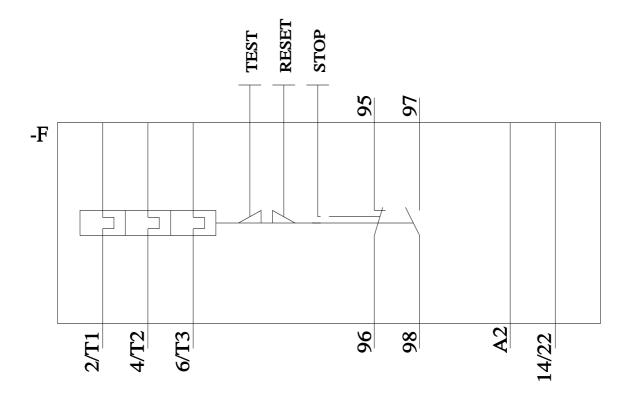

last modified: 3/8/2022 🖸