



Sample image

Datasheet

Article number: 70002296

Designation: CA10.A213.FT2

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			690 AC / DC			
Rated impulse withstand voltage Uimp						
Voltage (kV)		Overvoltage category	Pollution degree	Supply system		Function
4 III			3	Valid for lines with grounded common neutral termination		Switch disconnecter
Rated uninterrupted current Iu/Ith						
Current (A)		Ambient temperature (°C)	Peak temperature (°C) additional requirements			
20		55	60 Ambient temperature +55°C during 24 hours with peaks up to +60°C			
Rated operational current Ie						
Utilization category			Voltage (V)			Current (A)
AC-15			220 - 240			6
AC-15			380 - 440			4
Rated operational power						
Utilization category		Voltage (V)	No. of phases	No. of poles	Power (kW)	
AC-3		220 - 240	3	3	3	
AC-3		380 - 440	3	3	5,50	
AC-3		660 - 690	3	3	5,50	
AC-3		220 - 240	1	2	2,20	
AC-3		380 - 440	1	2	3	
AC-23A		220 - 240	3	3	3,70	
AC-23A		380 - 440	3	3	7,50	
AC-23A		660 - 690	3	3	7,50	
AC-23A		220 - 240	1	2	2,50	
AC-23A		380 - 440	1	2	3,70	
Max Fuse Rating IEC						
Fuse characteristic			No. of Fuses			Current (A)
gG			1			25
UL60947-4-1 , UL508						
Nominal Voltage						
			Voltage (V) AC / DC			
			300 AC / DC			
Rated insulation voltage Ui						
			Voltage (V) AC / DC			
			300 AC			
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		20	0 - 40		–	
Horsepower rating						
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles	Power (HP)
Reversing			110 - 120	1	2	0,17
Reversing			220 - 240	1	2	0,50
Reversing			277 - 277	1	2	0,60
Reversing			110 - 120	3	3	0,50
Reversing			220 - 240	3	3	1
DOL			110 - 120	1	2	0,50
DOL			220 - 240	1	2	1
DOL			277 - 277	1	2	2
DOL			110 - 120	3	3	1,50
DOL			220 - 240	3	3	3
Pilot duty rating code						
Duty Code						
A300						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.						
Temp. rating of wire						
			Temperature rating (°C)		Current (A) Text	
			60 - 75		– Use copper wire only	

Connecting instructions						
Markings						
When intended for use as a motor disconnector the device shall be provided with a method of being locked in the OFF-position.						
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	300	20	1	2	1	
AC	300	20	3	3	1	
CSA						
Nominal Voltage						
				Voltage (V)	AC / DC	
				300	AC	
Rated insulation voltage Ui						
				Voltage (V)	AC / DC	
				300	AC	
Rated thermal current						
		Current (A)	Ambient temperature (°C)		Additional Text	
		20	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting				Voltage (V)	No. of phases	No. of poles
DOL				110 - 120	1	2
DOL				220 - 240	1	2
DOL				277 - 277	1	2
DOL				110 - 120	3	3
DOL				220 - 240	3	3
						Power (HP)
						0,50
						1
						2
						1,50
						3
						Ambient temperature [°C]
						40
						40
						40
						40
						40
Pilot duty rating code						
Duty Code						
A300						
Temp. rating of wire						
			Temperature rating (°C)	Current (A) Text		
			75	-- only		
General Use						
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series	
AC	300	20	1	1	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
				tightening torque (Nm)	tightening torque (lb-in)	
				0,60	5	
Stripping length						
				Length (mm) --		
				8	STRIPPINGLENGTH	
Size of conductor						
composition of conductor	Min. / Max. value		No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire
solid wire	Min.		1	0.5mm²		Copper
solid wire	Min.		2	0.5mm²		Copper
flexible wire	Min.		1	0.75mm²		Copper
flexible wire	Min.		2	0.75mm²		Copper
flexible wire	Max.		2	2.5mm²		Copper
flexible wire	Max.		2	AWG 14		Copper
Single-core or stranded wire	Max.		2	AWG 12		Copper
Single-core or stranded wire	Max.		2	2.5mm²		Copper
flexible wire with ferrule according to DIN 46228	Min.		1	0.5mm²		Copper
flexible wire with ferrule according to DIN 46228	Max.		2	2.5mm²		Copper
flexible wire with ferrule according to DIN 46228	Min.		2	0.5mm²		Copper
Approbations						
Specification						Marking
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Recommended screw driver						
Type of screw driver				Value		
Cross Screwdriver				PH1		
Slot screwdriver according to DIN 5264				0,8x4		
General Information						
Text						
- Do not lubricate or treat contacts.						
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.						

General Information

Text

- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal


Mounting-FT2

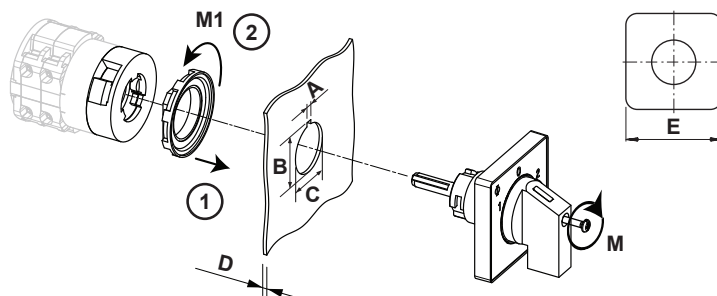

IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	H	3,20 mm
A+_tol.	H	0,20 mm
A-_tol.	H	0,00 mm
B	H	24,10 mm
B+_tol.	H	0,40 mm
B-_tol.	H	0,00 mm
C	Ø	22,30 mm
C+_tol.	Ø	0,40 mm
C-_tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	↺	0,50 Nm
M1	↺	1,80 Nm

Wiring diagram

CA10.A213.FT2





Switch program

CA10.A213.FT2



Kraus & Naimer


CA10
A213
Page 1 of 1

Face Plate																									
		1		3		5		7		9		11		13		15		17		19		21		23	
																									
Switching Angle 60 Total switching Angle 120		2		4		6		8		10		12		14		16		18		20		22		24	
1		300																							
		315																							
		330																							
		345																							
0		0																							
		15																							
		30																							
		45																							
2		60																							
		75																							
		90																							
		105																							
		120																							
		135																							
		150																							
		165																							
		180																							
		195																							
		210																							
		225																							
		240																							
		255																							
		270																							
		285																							

Version: 93

Face plate

S0.F071/A10.E1L

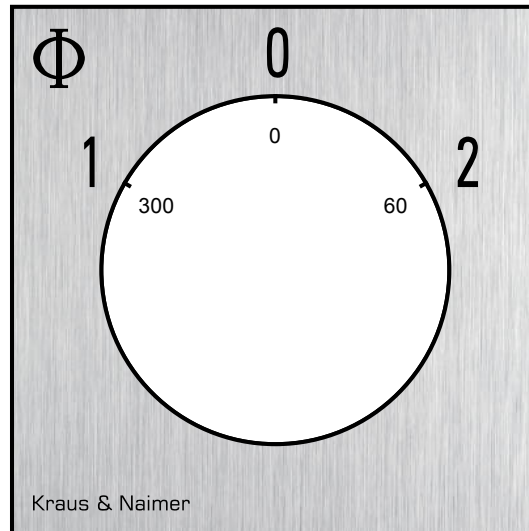

HANDLES

Designation: S0C.G251

Handle colour: "1" black

