



Sample image

Datasheet

Article number: 70005788

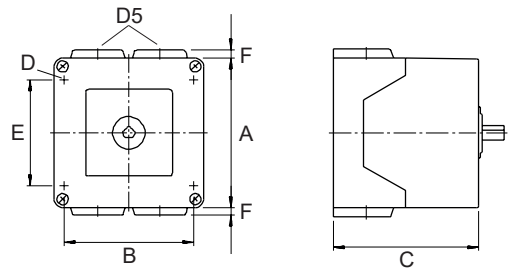

Designation: CA20.A410.PF1

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Tension assignée d'isolement Ui					
			Tension (V) AC / DC		
			690 AC / DC		
Courant Ininterrompu et thermique conventionnel Iu/Ith					
Intensité (A)	Température Ambiante (°)	Température Maxi (°)	Spécification complémentaire		
25	55	60	Température ambiante +55°C durant 24 heures avec point à +60°C		
Courant assigné d'emploi Ie					
Catégorie d'emploi			Tension (V)	Intensité (A)	
AC-15			220 - 240	8	
AC-15			380 - 440	5	
Puissance assignée d'emploi					
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)	
AC-3	220 - 240	3	3	4	
AC-3	380 - 440	3	3	7,50	
AC-3	660 - 690	3	3	7,50	
AC-3	220 - 240	1	2	3	
AC-3	380 - 440	1	2	3,70	
AC-23A	220 - 240	3	3	5,50	
AC-23A	380 - 440	3	3	11	
AC-23A	660 - 690	3	3	11	
AC-23A	220 - 240	1	2	3	
AC-23A	380 - 440	1	2	5,50	
Protection par fusible (IEC)					
Caractéri			Nombre de fusible	Intensité (A)	
gG			1	35	
UL60947-4-1 , UL508					
Nominal Voltage					
			Tension (V) AC / DC		
			600 AC		
Tension assignée d'isolement Ui					
			Tension (V) AC / DC		
			600 AC		
Rated thermal current					
Intensité (A)		Température Ambiante (°) Additional Text			
30		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
Reversing	110 - 120	1	2	0,33	40
Reversing	220 - 240	1	2	0,75	40
Reversing	277 - 277	1	2	1	40
Reversing	415 - 415	1	2	1,50	40
Reversing	440 - 480	1	2	2	40
Reversing	550 - 600	1	2	2	40
Reversing	110 - 120	3	3	1	40
Reversing	220 - 240	3	3	2	40
Reversing	415 - 415	3	3	3	40
Reversing	440 - 480	3	3	5	40
Reversing	550 - 600	3	3	5	40
DOL	110 - 120	1	2	1,50	40
DOL	220 - 240	1	2	3	40
DOL	277 - 277	1	2	3	40
DOL	415 - 415	1	2	3	40
DOL	440 - 480	1	2	5	40
DOL	550 - 600	1	2	5	40
DOL	110 - 120	3	3	3	40
DOL	220 - 240	3	3	7,50	40
DOL	415 - 415	3	3	7,50	40
DOL	440 - 480	3	3	10	40

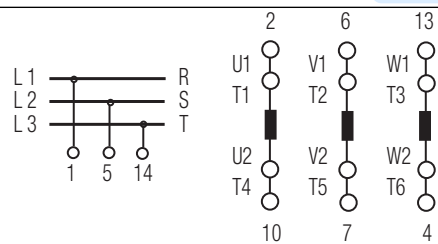
Horsepower rating						
Across-the-Line Motor Starting		Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL		550 - 600	3	3	10	40
Pilot duty rating code						
Duty Code						
A600						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnect are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.						
Temp. rating of wire						
Temperature rating (°C)			Intensité (A) Text			
75			– Use copper wire only			
Connecting instructions						
Markings						
When intended for use as a motor disconnect the device shall be provided with a method of being locked in the OFF-position.						
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	600	30	1	2	1	
AC	600	30	3	3	1	
CSA						
Nominal Voltage						
Tension (V) AC / DC						
600 AC						
Tension assignée d'isolement Ui						
Tension (V) AC / DC						
600 AC						
Rated thermal current						
Intensité (A)			Température Ambiante (°) Additional Text			
30			0 - 40 –			
Horsepower rating						
Across-the-Line Motor Starting		Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL		110 - 120	1	2	1,50	40
DOL		220 - 240	1	2	3	40
DOL		277 - 277	1	2	3	40
DOL		415 - 415	1	2	5	40
DOL		440 - 480	1	2	5	40
DOL		550 - 600	1	2	5	40
DOL		110 - 120	3	3	3	40
DOL		220 - 240	3	3	7,50	40
DOL		415 - 415	3	3	10	40
DOL		440 - 480	3	3	10	40
DOL		550 - 600	3	3	10	40
Pilot duty rating code						
Duty Code						
A600						
Temp. rating of wire						
Temperature rating (°C)			Intensité (A) Text			
75			– only			
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	600	30	1	1	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
tightening torque (Nm)			tightening torque (lb-in)			
1			9			
Stripping length						
Length (mm) –						
9 STRIPPINGLENGTH						
Size of conductor						
composition of conductor	Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)		Material of the wire
solid wire	Min.	1		0,75mm²		Copper
solid wire	Min.	2		0,75mm²		Copper
flexible wire	Min.	1		1,5mm²		Copper
flexible wire	Max.	2		AWG 12		Copper
flexible wire	Max.	2		4mm²		Copper
flexible wire	Min.	2		1,5mm²		Copper
Single-core or stranded wire	Max.	2		AWG 10		Copper
Single-core or stranded wire	Max.	2		4mm²		Copper
flexible wire with ferrule according to DIN 46228	Min.	1		1mm²		Copper
flexible wire with ferrule according to DIN 46228	Max.	2		2,5mm²		Copper
flexible wire with ferrule according to DIN 46228	Min.	2		1mm²		Copper
Approbations						
Specification					Marking	
EAC					EAC	

Approbations	
Specification	Marking
CE marking	
UK Directives	
CSA C.22.2 No.14	
GB/T14048.3	
Recommandations concernant le tournevis	
Type	Value
Tournevis cruciforme	PH1
Slot screwdriver according to DIN 5264	0,8x5,5
General Information	
Text	
- Ne jamais lubrifier ou traiter les contacts. - Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur. - Use copper wire only. Do not coat the wire end with tin. - Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées. - Après mise en place des les commutateurs l'espace entre bornes doit être suffisant pour répondre aux exigences des normes en vigueur.	
Waste Electrical & Electronic Equipment (WEEE)	
Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com
Proposition 65	
Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .
Type de contacts: Rigid contact bridge	
Revêtement des Contacts: Silver	
Types de raccordement: Screw terminal	

Mounting-PF1			
			
IP - Code front side		IP65	
Stages		3,00 - 4,00	
A	□	82,00 mm	
B	H	68,00 mm	
C	H	90,10 mm	
D	Ø	4,40 mm	
D5	Ø	4,00 x M20	
E	H	52,00 mm	
F	H	5,00 mm	


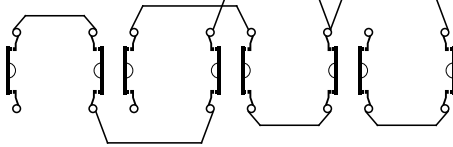
Wiring diagram

CA20.A410.PF1



Switch program

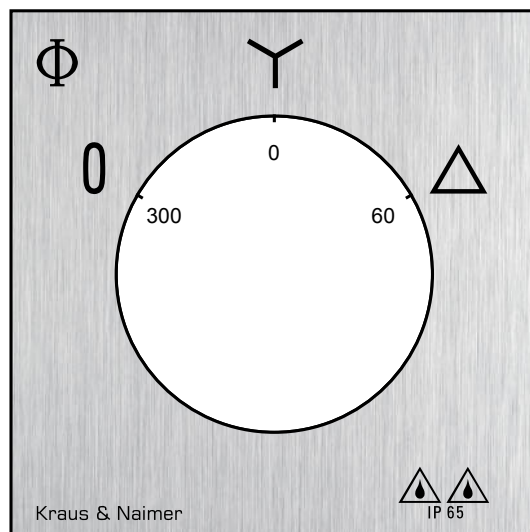
CA20.A410.PF1

 Kraus & Naimer		CA20		A410		Page 1 of 1							
Face Plate													
		1	3	5	7	9	11	13	15	17	19	21	23
													
Switching Angle 60 Total switching Angle 120		2	4	6	8	10	12	14	16	18	20	22	24
0													
315													
330													
345													
Y 0													
15													
30													
45													
Δ 60													
75													
90													
105													
120													
135													
150													
165													
180													
195													
210													
225													
240													
255													
270													
285													

Version: 55

Face plate

S1.F080/A10.PFL



HANDLES

Designation: S1B.G257

Handle colour: "7" electro grey

