

Sample image

Datasheet

Article number: 70008894

Designation: KG10B.T202/01.E

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Tension assignée d'isolement Ui						
Tension (V) AC / DC						
690 AC						
Courant Ininterrompu et thermique conventionnel Iu/Ith						
Intensité (A)	Température Ambiante (*)	Température Maxi (*)	Spécification complémentaire			
20	50	55	Température ambiante +50°C durant 24 heures avec point à +55°C			
Courant assigné d'emploi Ie						
Catégorie d'emploi		Tension (V)		Intensité (A)		
AC-15		220 - 240		6		
AC-15		380 - 440		4		
Puissance assignée d'emploi						
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)		
AC-3	220 - 240	3	3	2,20		
AC-3	380 - 440	3	3	3,70		
AC-3	660 - 690	3	3	3,70		
AC-3	220 - 240	1	2	1,10		
AC-3	380 - 440	1	2	1,50		
AC-23A	220 - 240	3	3	3		
AC-23A	380 - 440	3	3	5,50		
AC-23A	660 - 690	3	3	5,50		
AC-23A	220 - 240	1	2	1,50		
AC-23A	380 - 440	1	2	2,20		
Protection par fusible (IEC)						
Caractéristique		Nombre de fusible		Intensité (A)		
gG		1		20		
UL60947-4-1 , UL508						
Nominal Voltage						
Tension (V) AC / DC						
300 AC						
Tension assignée d'isolement Ui						
Tension (V) AC / DC						
300 AC						
Rated thermal current						
Intensité (A)		Température Ambiante (*)		Additional Text		
20		0 - 40		--		
20		0 - 40		--		
Horsepower rating						
Across-the-Line Motor Starting		Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL		110 - 220	1	2	0,50	40
DOL		220 - 240	1	2	1	40
DOL		277 - 277	1	2	1	40
DOL		110 - 120	3	3	1	40
DOL		220 - 240	3	3	2	40
Pilot duty rating code						
Duty Code						
A300						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 300V ac max. when protected by Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)		Intensité (A)		Text		
60 - 75				-- Use copper wire only		
Connecting instructions						
Markings						
Break all lines.						
For use on a flat surface of a type 1 enclosure.						
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	277	20	1	1	1	

General Use							
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series		
AC	300	20	1	2	1		
AC	300	20	3	3	1		
General Information							
Text							
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.							
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.							
CSA							
Nominal Voltage							
			Tension (V) AC / DC				
			300 AC				
Tension assignée d'isolement Ui							
			Tension (V) AC / DC				
			300 AC				
Rated thermal current							
		Intensité (A)	Température Ambiante (°)		Additional Text		
		20	0 - 40		--		
		20	0 - 40		--		
Horsepower rating							
Across-the-Line Motor Starting			Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL			110 - 220	1	2	0,50	40
DOL			220 - 240	1	2	1	40
DOL			277 - 277	1	2	1	40
DOL			110 - 120	3	3	1	40
DOL			220 - 240	3	3	2	40
Pilot duty rating code							
Duty Code							
A300							
Temp. rating of wire							
		Temperature rating (°C)		Intensité (A) Text			
		75		-- --			
General Use							
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series		
AC	277	20	1	1	1		
AC	277	20	3	3	1		
GENERAL TECHNICAL INFORMATION							
Size of conductor							
composition of conductor	Min. / Max. value		No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire	
solid wire	Min.		1	0,5mm²		Copper	
solid wire	Min.		2	0,5mm²		Copper	
flexible wire	Min.		1	0,75mm²		Copper	
flexible wire	Min.		2	0,75mm²		Copper	
flexible wire	Max.		1	AWG 12		Copper	
flexible wire	Max.		1	2,5mm²		Copper	
Single-core or stranded wire	Max.		1	AWG 12		Copper	
Single-core or stranded wire	Max.		1	2,5mm²		Copper	
flexible wire with ferrule according to DIN 46228	Max.		1	2,5mm²		Copper	
flexible wire with ferrule according to DIN 46228	Min.		1	0,5mm²		Copper	
flexible wire with ferrule according to DIN 46228	Min.		2	0,5mm²		Copper	
Stripping length							
			Length (mm) --				
							
			8				
Recommandations concernant le tournevis							
Type	Value						
Tournevis cruciforme	PH1						
Slot screwdriver according to DIN 5264	0,8x4						
Tightening torque of screws							
			tightening torque (Nm)		tightening torque (lb-in)		
			0,60		5		
Approbations							
Specification						Marking	
EAC							
CE marking							
UK Directives							
CSA C.22.2 No.14							
GB/T14048.3							

General Information

Text

- Ne jamais lubrifier ou traiter les contacts.
- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.
- Use copper wire only. Do not coat the wire end with tin.
- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.
- Après mise en place des les commutateurs l'espace entre bornes doit être suffisant pour répondre aux exigences des normes en vigueur.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal

Fixation-E

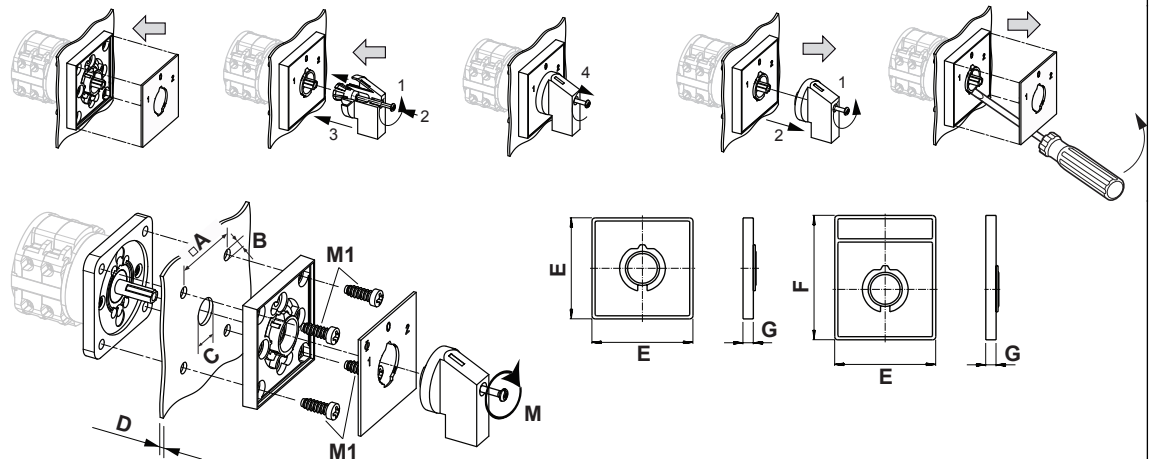


IP - Code front side		IP66, IP67
Stages		1,00 - 12,00
A	□	48,00 mm
B	∅	5,00 mm
C	∅	11,00 - 15,00 mm
D	H	<= 4,00 mm
E	∅	64,00 mm
F	H	78,00 mm
G	H	7,40 mm
M	M̄	0,70 Nm
M1	M̄1	0,90 Nm



Wiring diagram

KG10B.T302.E

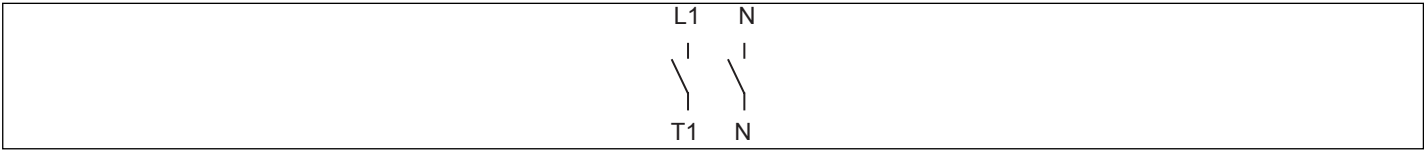

Switch program

KG10B.T302.E



Kraus & Naimer

KG10B	T302E	E	Page 1 of 1
--------------	--------------	----------	--------------------

Face Plate



Marking plate: S0D H043 51F



Switching Angle

Total switching Angle

2	4	6	8	10	12	14	16	18	20	22	24
N	L1										

0	270										
	285										
	300										
	315										
	330										
	345										
1	0										
	15										
	30										
	45										
	60										
	75										
	90										
	105										
	120										
	135										
	150										
	165										
	180										
	195										
	210										
	225										
	240										
	255										

Version: 2

06.14.2023 02:13 PM v3.21

<https://www.krausnaimer.com>

Page 5 of 8

Face plate

S1.F456/C10.V11H





Sample image

PADLOCK DEVICE

with F-handle ring

Designation: S1.V840G/D61/A1

Colour of F-handle ring: "D" red


Colour of face ring: "6" yellow

Locking position: "1" at 270° (1x90°)

Type of mounting: "A" for type of mounting E

Type of mounting: "A" for type of mounting GK (Rose)

Switch type: "1" for C-switches and for KG10.

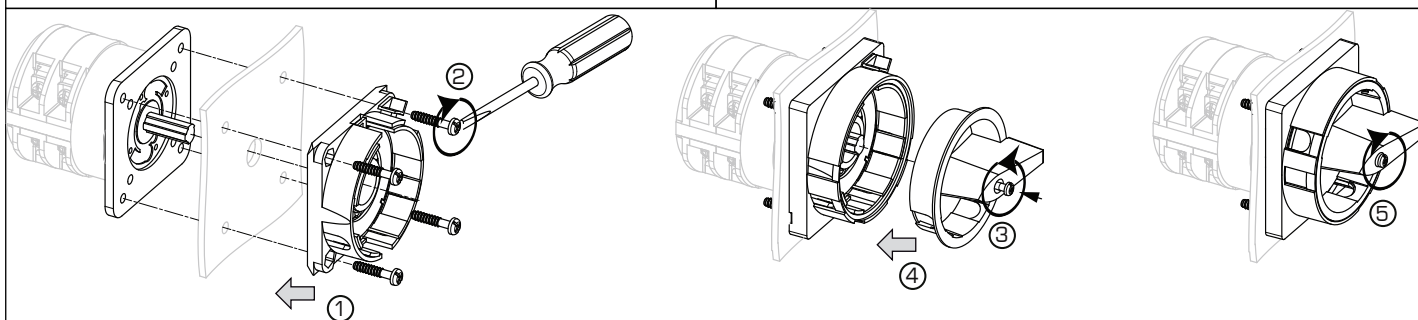

MOUNTING

1 + 2 The padlock device has to be mounted by four cylinder head screws from the front.

3 Loosen the screw and

4 Push it into the handle onto the shaft

5 Fasten the screw.



1 Loose handle screw

2 remove handle.

3 Insert a proper auxiliary tool at those points of the frame of the device which are marked by a screw driver on the drawing and remove the frame.

4 Fixing screws can be loosen now.