

Sample image

Datasheet

Article number: 70009609

Designation: KG10A.T203/03.FT2

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Tension assignée d'isolement Ui					
Tension (V) AC / DC					
690 AC					
Courant Ininterrompu et thermique conventionnel Iu/Ith					
Intensité (A)	Température Ambiante (°)	Température Maxi (°)	Spécification complémentaire		
20	50	55	Température ambiante +50°C durant 24 heures avec point à +55°C		
Courant assigné d'emploi Ie					
Catégorie d'emploi			Tension (V)		Intensité (A)
AC-15			220 - 240		6
AC-15			380 - 440		4
Puissance assignée d'emploi					
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)	
AC-3	220 - 240	3	3	2,20	
AC-3	380 - 440	3	3	3,70	
AC-3	660 - 690	3	3	3,70	
AC-3	220 - 240	1	2	1,10	
AC-3	380 - 440	1	2	1,50	
AC-23A	220 - 240	3	3	3	
AC-23A	380 - 440	3	3	5,50	
AC-23A	660 - 690	3	3	5,50	
AC-23A	220 - 240	1	2	1,50	
AC-23A	380 - 440	1	2	2,20	
Protection par fusible (IEC)					
Caractéri			Nombre de fusible		Intensité (A)
gG			1		20
UL60947-4-1 , UL508					
Nominal Voltage					
Tension (V) AC / DC					
300 AC					
Tension assignée d'isolement Ui					
Tension (V) AC / DC					
300 AC					
Rated thermal current					
Intensité (A)		Température Ambiante (°) Additional Text			
20		0 - 40 --			
Horsepower rating					
Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL	110 - 220	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	1	40
DOL	110 - 120	3	3	1	40
DOL	220 - 240	3	3	2	40
Pilot duty rating code					
Duty Code					
A300					
SCCR / Max. fuse rating					
Conditions of acceptability					
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 300V ac max. when protected by Class J fuses.					
Temp. rating of wire					
Temperature rating (°C)		Intensité (A) Text			
60 - 75		-- Use copper wire only			
Connecting instructions					
Markings					
Break all lines.					
For use on a flat surface of a type 1 enclosure.					
General Use					
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series
AC	277	20	1	1	1
AC	300	20	1	2	1

General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	300	20	1	2	1	
AC	300	20	3	3	1	
General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
				Tension (V) AC / DC		
				300 AC		
Tension assignée d'isolement Ui						
				Tension (V) AC / DC		
				300 AC		
Rated thermal current						
		Intensité (A)			Température Ambiante (°)	Additional Text
		20			0 - 40	--
Horsepower rating						
Across-the-Line Motor Starting				Tension (V)	Nb de phases	Nb de pôles
DOL				110 - 220	1	2
DOL				220 - 240	1	2
DOL				277 - 277	1	2
DOL				110 - 120	3	3
DOL				220 - 240	3	3
Pilot duty rating code						
Duty Code						
A300						
Temp. rating of wire						
		Temperature rating (°C)			Intensité (A)	Text
		75			--	--
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	277	20	1	1	1	
AC	277	20	3	3	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
				tightening torque (Nm)	tightening torque (lb-in)	
				0,60	5	
Stripping length						
				Length (mm)	--	
				8	STRIPPINGLENGTH	
Size of conductor						
composition of conductor		Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire		Min.	1		0,5mm²	Copper
solid wire		Min.	2		0,5mm²	Copper
flexible wire		Min.	1		0,75mm²	Copper
flexible wire		Min.	2		0,75mm²	Copper
flexible wire		Max.	1		AWG 12	Copper
flexible wire		Max.	1		2,5mm²	Copper
Single-core or stranded wire		Max.	1		AWG 12	Copper
Single-core or stranded wire		Max.	1		2,5mm²	Copper
flexible wire with ferrule according to DIN 46228		Max.	1		2,5mm²	Copper
flexible wire with ferrule according to DIN 46228		Min.	1		0,5mm²	Copper
flexible wire with ferrule according to DIN 46228		Min.	2		0,5mm²	Copper
Approbations						
Specification						Marking
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Recommandations concernant le tournevis						
Type	Value					
Tournevis cruciforme	PH1					
Slot screwdriver according to DIN 5264	0,8x4					
General Information						
Text						
- Ne jamais lubrifier ou traiter les contacts.						

General Information

Text

- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.
- Use copper wire only. Do not coat the wire end with tin.
- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.
- Après mise en place des les commutateurs l'espace entre bornes doit être suffisant pour répondre aux exigences des normes en vigueur.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal


Fixation-FT2

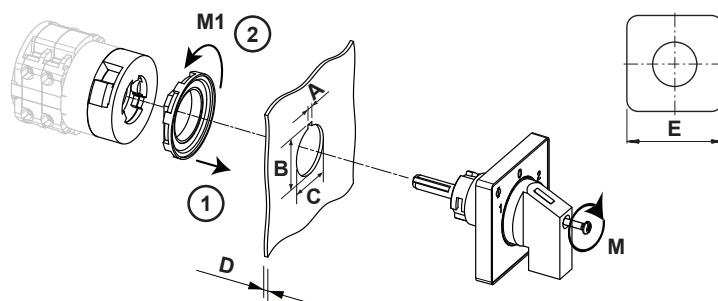

IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	H	3,20 mm
A+_tol.	H	0,20 mm
A-_tol.	H	0,00 mm
B	H	24,10 mm
B+_tol.	H	0,40 mm
B-_tol.	H	0,00 mm
C	Ø	22,30 mm
C+_tol.	Ø	0,40 mm
C-_tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	M̃	0,50 Nm
M1	M̃	1,80 Nm

Wiring diagram

KG10A.T303.FT2

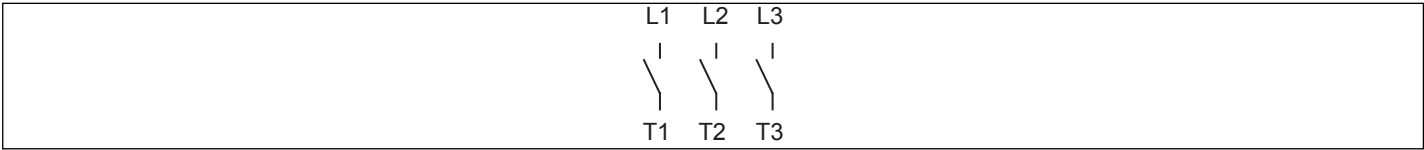


Switch program

KG10A.T303.FT2



Kraus & Naimer


KG10A **T303E** **Page 1 of 1**

Face Plate													
		T3	T1		T2								
		1	3	5	7	9	11	13	15	17	19	21	23
		Marking plate: S0D H043 51A 											
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16	18	20	22	24
		L3	L1		L2								
0	270												
	285												
	300												
	315												
	330												
	345												
1	0												
	15												
	30												
	45												
	60												
	75												
	90												
	105												
	120												
	135												
	150												
	165												
	180												
	195												
	210												
	225												
	240												
	255												

Version: 2

Face plate

S0.F456/E10.E1L

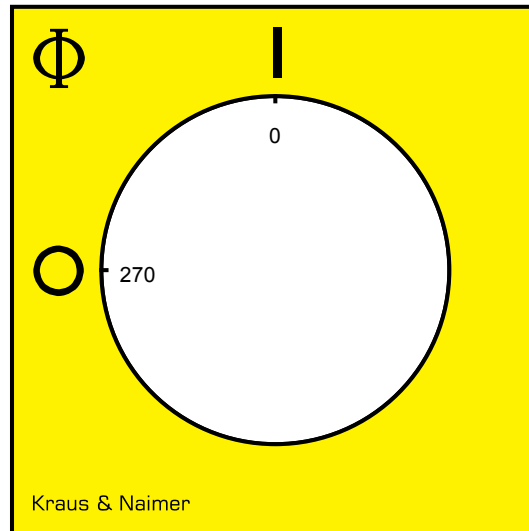



Sample image

PADLOCK DEVICE with type F-handle (locking direction at right angle to the shaft) for type of mounting FT, *FT1, *FT2 und *FT6

Designation: S0.V840A/A2B1-FT2

Lock bow diameter: "A" for lock bow diameter 4,5-5,0mm

Colour of handle: "2" red, locking bar flag yellow

Locking program: "B" 09:00, knockouts every 90°

Colour of face plate frame: "1" black

Type of mounting: "-FT2" for type of mounting *FT2/*FT2-V

