

Sample image

Datasheet

Article number: 70010087

Designation: KG100.T203/01.E

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107				
Tension assignée d'isolement Ui				
Tension (V) AC / DC				
690 AC				
Courant Ininterrompu et thermique conventionnel Iu/Ith				
Intensité (A)	Température Ambiante (°)	Température Maxi (°)	Spécification complémentaire	
100	50	55	Température ambiante +50°C durant 24 heures avec point à +55°C	
Courant assigné d'emploi Ie				
Catégorie d'emploi		Tension (V)		Intensité (A)
AC-32A		20 - 400		100
Puissance assignée d'emploi				
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)
AC-3	220 - 240	3	3	18,50
AC-3	380 - 440	3	3	30
AC-3	660 - 690	3	3	22
AC-23A	220 - 240	3	3	22
AC-23A	380 - 440	3	3	37
AC-23A	660 - 690	3	3	30
Protection par fusible (IEC)				
Caractéri		Nombre de fusible		Intensité (A)
gG		1		100
UL60947-4-1 , UL508				
Nominal Voltage				
Tension (V) AC / DC				
600 AC				
Tension assignée d'isolement Ui				
Tension (V) AC / DC				
600 AC				
Rated thermal current				
Intensité (A)		Température Ambiante (°) Additional Text		
100		0 - 40 --		
Horsepower rating				
Across-the-Line Motor Starting	Tension (V)	Nb de phases	Nb de pôles	Power (HP) Ambient temperature [°C]
DOL	110 - 120	1	2	5 40
DOL	220 - 240	1	2	15 40
DOL	277 - 277	1	2	15 40
DOL	415 - 415	1	2	25 40
DOL	440 - 480	1	2	30 40
DOL	550 - 600	1	2	30 40
DOL	110 - 120	3	3	10 40
DOL	220 - 240	3	3	25 40
DOL	415 - 415	3	3	40 40
DOL	440 - 480	3	3	50 40
DOL	550 - 600	3	3	50 40
SCCR / Max. fuse rating				
Conditions of acceptability				
These devices are suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses or Circuit Breaker Type SFHA36AT0250, manufactured by General Electric.				
Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by Class J fuses, 100A max.				
Temp. rating of wire				
Temperature rating (°C)		Intensité (A) Text		
75		-- --		
Connecting instructions				
Markings				
Break all lines.				
General Use				
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles No. of contacts in series
AC	277	100	1	1 1
AC	600	100	1	2 1
AC	600	100	3	3 1

General Information
Text

- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.

- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

CSA
Nominal Voltage
Tension (V) AC / DC

600 AC

Tension assignée d'isolement Ui
Tension (V) AC / DC

600 AC

Rated thermal current
Intensité (A)

100

Température Ambiante (°) Additional Text

0 - 40 -

Horsepower rating
Across-the-Line Motor Starting

	<i>Tension (V)</i>	<i>Nb de phases</i>	<i>Nb de pôles</i>	<i>Power (HP)</i>	<i>Ambient temperature [°C]</i>
DOL	110 - 120	1	2	5	40
DOL	220 - 240	1	2	15	40
DOL	277 - 277	1	2	15	40
DOL	415 - 415	1	2	25	40
DOL	440 - 480	1	2	30	40
DOL	550 - 600	1	2	30	40
DOL	110 - 120	3	3	10	40
DOL	220 - 240	3	3	25	40
DOL	415 - 415	3	3	40	40
DOL	440 - 480	3	3	50	40
DOL	550 - 600	3	3	50	40

Temp. rating of wire
Temperature rating (°C)

75

Intensité (A) Text

-- --

General Use

<i>AC / DC</i>	<i>Tension (V)</i>	<i>Intensité (A)</i>	<i>Nb de phases</i>	<i>Nb de pôles</i>	<i>No. of contacts in series</i>
AC	277	100	1	1	1
AC	600	100	1	2	1
AC	600	100	3	3	1

GENERAL TECHNICAL INFORMATION
Size of conductor

<i>composition of conductor</i>	<i>Min. / Max. value</i>	<i>No. of conductor per terminal</i>	<i>Cross section (mm²) or (AWG/kcmil)</i>	<i>Material of the wire</i>
solid wire	Min.	1	2,5mm²	Copper
flexible wire	Min.	1	4mm²	Copper
flexible wire	Max.	1	35mm²	Copper
flexible wire	Max.	1	AWG 2	Copper
Single-core or stranded wire	Max.	1	AWG 1/0	Copper
Single-core or stranded wire	Max.	1	50mm²	Copper
flexible wire with sleeve	Max.	1	35mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	2,5mm²	Copper

Stripping length
Length (mm) --

14

Recommandations concernant le tournevis

<i>Type</i>	<i>Value</i>
Tournevis cruciforme	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Tightening torque of screws
tightening torque (Nm)

3

tightening torque (lb-in)

27

Approbations
Specification

EAC

CE marking

UK Directives

CSA C.22.2 No.14

GB/T14048.3

General Information
Text

- Ne jamais lubrifier ou traiter les contacts.

Marking


General Information

Text

- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.
- Use copper wire only. Do not coat the wire end with tin.
- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.

Waste Electrical & Electronic Equipment (WEEE)

Picture name

Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name

Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal

Fixation-E

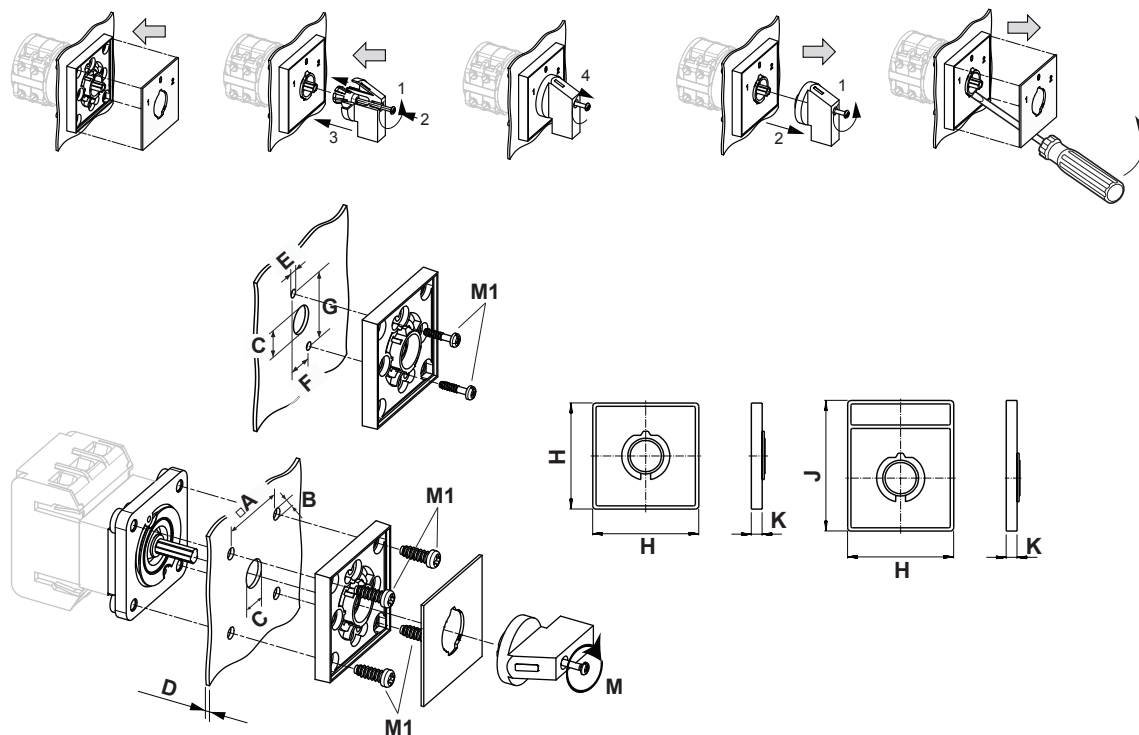

IP - Code front side		IP66, IP67
Stages		1,00 - 12,00
A	□	48,00 mm
B	∅	5,00 mm
C	∅	10,00 - 15,00 mm
D	H	<= 4,00 mm
E	∅	4,50 mm
F	H	14,00 mm
G	H	37,00 mm
H	H	64,00 mm
J	H	78,50 mm
K	H	7,40 mm
M	↺	0,70 Nm
M1	↺	0,90 Nm



Wiring diagram

KG100.T303.E



Switch program

KG100.T303.E



Kraus & Naimer

KG100
T303
E

Page 1 of 1

Face Plate									
		L1	L2	L3					
		1	3	5	7	9	11	13	15
  									
Switching Angle 90 Total switching Angle 90		2	4	6	8	10	12	14	16
		T1	T2	T3					
0	270								
1	0								
	90								
	180								

Version: 102

Face plate

S1.F456/C10.V11H





Sample image

PADLOCK DEVICE

with F-handle ring

Designation: S1.V840G/D61/A2

Colour of F-handle ring: "D" red


Colour of face ring: "6" yellow

Locking position: "1" at 270° (1x90°)

Type of mounting: "A" for type of mounting E

Type of mounting: "A" for type of mounting GK (Rose)

Switch type: "2" for KA-, KG- and KH(R)-switches

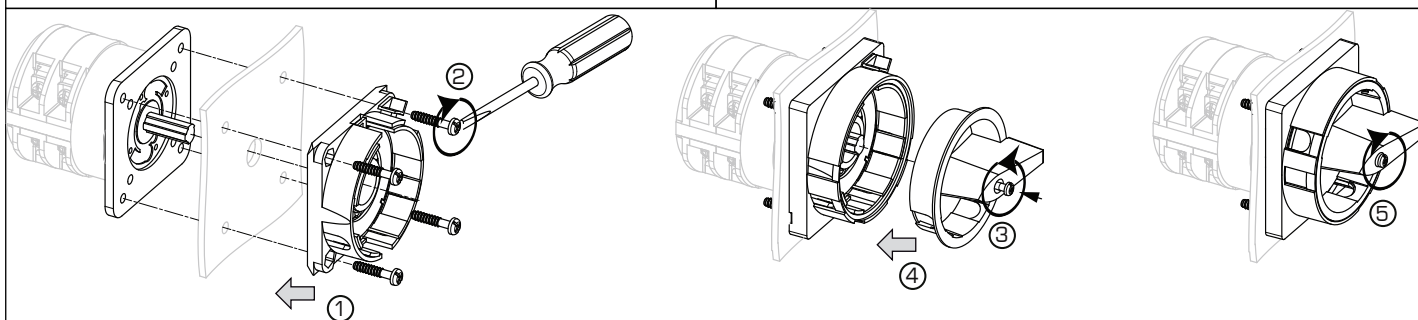

MOUNTING

1 + 2 The padlock device has to be mounted by four cylinder head screws from the front.

3 Loosen the screw and

4 Push it into the handle onto the shaft

5 Fasten the screw.



1 Loose handle screw

2 remove handle.

3 Insert a proper auxiliary tool at those points of the frame of the device which are marked by a screw driver on the drawing and remove the frame.

4 Fixing screws can be loosen now.