



Sample image

Datasheet

Article number: 70003498

Designation: CA10.A401.PN1

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
690 AC / DC					
Rated impulse withstand voltage Uimp					
Voltage (kV)		Overvoltage category	Pollution degree	Supply system	Function
4 III			3	Valid for lines with grounded common neutral termination	Switch disconnecter
Rated uninterrupted current Iu/Ith					
Current (A)		Ambient temperature (°C)	Peak temperature (°C)	additional requirements	
20		55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C	
Rated operational current Ie					
Utilization category			Voltage (V)		Current (A)
AC-15			220 - 240		6
AC-15			380 - 440		4
Rated operational power					
Utilization category		Voltage (V)	No. of phases	No. of poles	Power (kW)
AC-3		220 - 240	3	3	3
AC-3		380 - 440	3	3	5,50
AC-3		660 - 690	3	3	5,50
AC-3		220 - 240	1	2	2,20
AC-3		380 - 440	1	2	3
AC-23A		220 - 240	3	3	3,70
AC-23A		380 - 440	3	3	7,50
AC-23A		660 - 690	3	3	7,50
AC-23A		220 - 240	1	2	2,50
AC-23A		380 - 440	1	2	3,70
Max Fuse Rating IEC					
Fuse characteristic			No. of Fuses		Current (A)
gG			1		25
UL60947-4-1 , UL508					
Nominal Voltage					
Voltage (V) AC / DC					
300 AC / DC					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
300 AC					
Rated thermal current					
Current (A)		Ambient temperature (°C)		Additional Text	
20		0 - 40		--	
Horsepower rating					
Across-the-Line Motor Starting			Voltage (V)	No. of phases	No. of poles
Reversing			110 - 120	1	2
Reversing			220 - 240	1	2
Reversing			277 - 277	1	2
Reversing			110 - 120	3	3
Reversing			220 - 240	3	3
DOL			110 - 120	1	2
DOL			220 - 240	1	2
DOL			277 - 277	1	2
DOL			110 - 120	3	3
DOL			220 - 240	3	3
Pilot duty rating code					
Duty Code					
A300					
SCCR / Max. fuse rating					
Conditions of acceptability					
These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.					
Temp. rating of wire					
Temperature rating (°C)			Current (A) Text		
60 - 75			-- Use copper wire only		

Markings

When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

AC / DC

CSA

Nomin	
-------	--

--	--

Rated insulation voltage Ui	
	Voltage (V) AC / DC

--

Rated thermal current			
	Current (A)	Ambient temperature (°C)	Additional Text

--

Horsepower rating						
Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]	

Across-the-Line Mo

Pilot duty rating code
Duty Code

Duty Code

<i>Duty Code</i>

A300

[illegible]

General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series

AC / DC

GENERAL TECHNICAL INFORMATION

Size of conductor

--	--

Stripping length	Length (mm)
------------------	-------------

[illegible]

Recommended screw driver	
Type of screw driver	Value

Type of screw driver

Tightening torque of screws		
	<i>tightening torque (Nm)</i>	<i>tightening torque (lb·in)</i>

[illegible]

Approbations	
Specification	Marking

Specification

General Information
Text

Text

- Do not lubricate or t

- Do

General Information

Text

- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-PN1

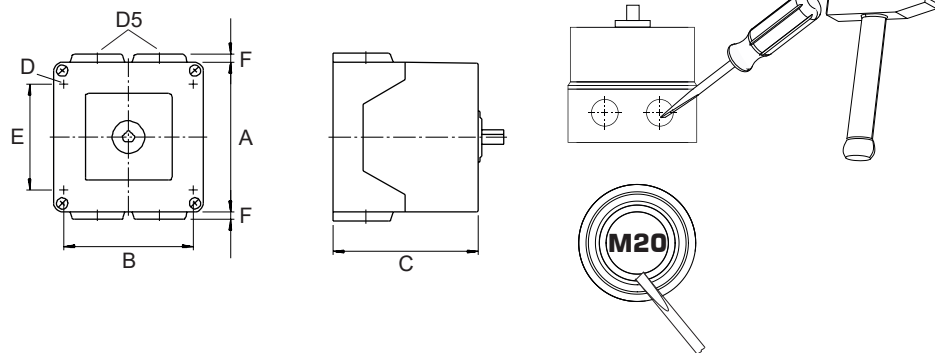

IP - Code front side		IP42
Stages		3,00 - 3,00
A	□	64,00 mm
B	H	50,00 mm
C	H	55,30 mm
D	Ø	4,40 mm
D5	Ø	4,00 x M20
E	H	36,00 mm
F	H	4,00 mm

Wiring diagram

CA10.A401.PN1




Switch program

CA10.A401.PN1



Kraus & Naimer


CA10
A401
Page 1 of 1

Face Plate													
													
		1	3	5	7	9	11	13	15	17	19	21	23
Switching Angle 60 Total switching Angle 120		2	4	6	8	10	12	14	16	18	20	22	24
1	300												
	315												
0	330												
	345												
2	0												
	15												
2	30												
	45												
2	60												
	75												
2	90												
	105												
2	120												
	135												
2	150												
	165												
2	180												
	195												
2	210												
	225												
2	240												
	255												
2	270												
	285												

Version: 60

Face plate

S0.F071/A10.PNL

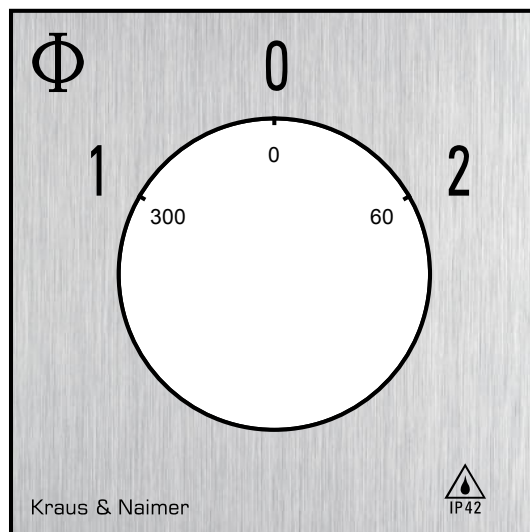

HANDLES

Designation: S0C.G257

Handle colour: "7" electro grey

