



Sample image

Datasheet

Article number: 70019054

Description: Other Component

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Номинальное напряжение изоляции Ui

Напряжение (В) Переменный ток/Постоянный ток
690 AC

Номинальный длительный ток Iu/Ith

Сила тока (А)	Температура окружающей среды (°C)	Пиковое значение температуры (°C)	Дополнительные требования
100	50	55	Средняя температура окружающей среды +50°C в течение 24 часов с максимальным значением +55°C

Номинальный рабочий ток Ie

Категория применения	Напряжение (диапазон) (В)	Сила тока (А)
AC-32A	20 - 400	100

Номинальная рабочая мощность

Категория применения	Напряжение (диапазон) (В)	Количество фаз	Количество полюсов	Мощность (кВт)
AC-3	220 - 240	3	3	18,50
AC-3	380 - 440	3	3	30
AC-3	660 - 690	3	3	22
AC-23A	220 - 240	3	3	22
AC-23A	380 - 440	3	3	37
AC-23A	660 - 690	3	3	30

Максимальный номинал предохранителя по IEC

Характеристика предохранителя	Количество предохранителей	Сила тока (А)
gG	1	100

UL60947-4-1, UL508

Nominal Voltage

Voltage (V) AC / DC
600 AC

Номинальное напряжение изоляции Ui

Напряжение (В) Переменный ток/Постоянный ток
600 AC

Rated thermal current

Current (A)	Ambient temperature (°C)	Additional Text
100	0 - 40	--

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	5	40
DOL	220 - 240	1	2	15	40
DOL	277 - 277	1	2	15	40
DOL	415 - 415	1	2	25	40
DOL	440 - 480	1	2	30	40
DOL	550 - 600	1	2	30	40
DOL	110 - 120	3	3	10	40
DOL	220 - 240	3	3	25	40
DOL	415 - 415	3	3	40	40
DOL	440 - 480	3	3	50	40
DOL	550 - 600	3	3	50	40

SCCR / Max. fuse rating

Conditions of acceptability

These devices are suitable for use on circuits capable of delivering not more than 10kA rms symmetrical amperes, 600V ac max. when protected by Type RK1 fuses or Circuit Breaker Type SFHA36AT0250, manufactured by General Electric.

Suitable for use on a circuit capable of delivering not more than 65000 rms symmetrical amperes 600V max., when protected by Class J fuses, 100A max.

Temp. rating of wire

Temperature rating (°C)	Current (A)	Text
75	--	--

Connecting instructions

Markings

Break all lines.

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	100	1	1	1

General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	600	100	1	2	1
AC	600	100	3	3	1

Общая информация

Текст

- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.

- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

CSA

Nominal Voltage

Voltage (V) AC / DC
600 AC

Номинальное напряжение изоляции Ui

Напряжение (В) Переменный ток/Постоянный ток
600 AC

Rated thermal current

Current (A) Ambient temperature (°C) Additional Text
100 0 - 40 -

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	5	40
DOL	220 - 240	1	2	15	40
DOL	277 - 277	1	2	15	40
DOL	415 - 415	1	2	25	40
DOL	440 - 480	1	2	30	40
DOL	550 - 600	1	2	30	40
DOL	110 - 120	3	3	10	40
DOL	220 - 240	3	3	25	40
DOL	415 - 415	3	3	40	40
DOL	440 - 480	3	3	50	40
DOL	550 - 600	3	3	50	40

Temp. rating of wire

Temperature rating (°C) Current (A) Text
75 -- --

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	100	1	1	1
AC	600	100	1	2	1
AC	600	100	3	3	1

ОСНОВНАЯ ТЕХНИЧЕСКАЯ ИНФОРМАЦИЯ

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm ²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	2,5mm ²	Copper
flexible wire	Min.	1	4mm ²	Copper
flexible wire	Max.	1	35mm ²	Copper
flexible wire	Max.	1	AWG 2	Copper
Single-core or stranded wire	Max.	1	AWG 1/0	Copper
Single-core or stranded wire	Max.	1	50mm ²	Copper
flexible wire with sleeve	Max.	1	35mm ²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	2,5mm ²	Copper

Stripping length

Length (mm) --



Рекомендуемая отвертка

Тип отвертки	Value
Крестовая отвёртка	PH2
Slot screwdriver according to DIN 5264	1,2x6,5

Момент затяжки винтов

Момент затяжки (Нм) Момент затяжки (фунт-дюйм)
3 27

Approbations

Specification	Marking
EAC	
CE marking	
UK Directives	
CSA C.22.2 No.14	
GB/T14048.3	

Общая информация

Текст

- Не смазывайте и не разбирайте контакты.
- Переключатели могут быть установлены, подключены и введены в эксплуатацию только квалифицированным персоналом в соответствии с принятыми техническими правилами.
- Используйте только медные провода. Не покрывать конец провода оловом.
- Клеммы с заводскими перемычками затянуты в процессе производства. Во время откручивания скреплённых перемычками клемм проследите, что бы перемычки не потерялись. После подключения все винты клемм должны быть затянуты с рекомендуемым моментом затяжки винта.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company, return to the supplier for disposal, or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-VE

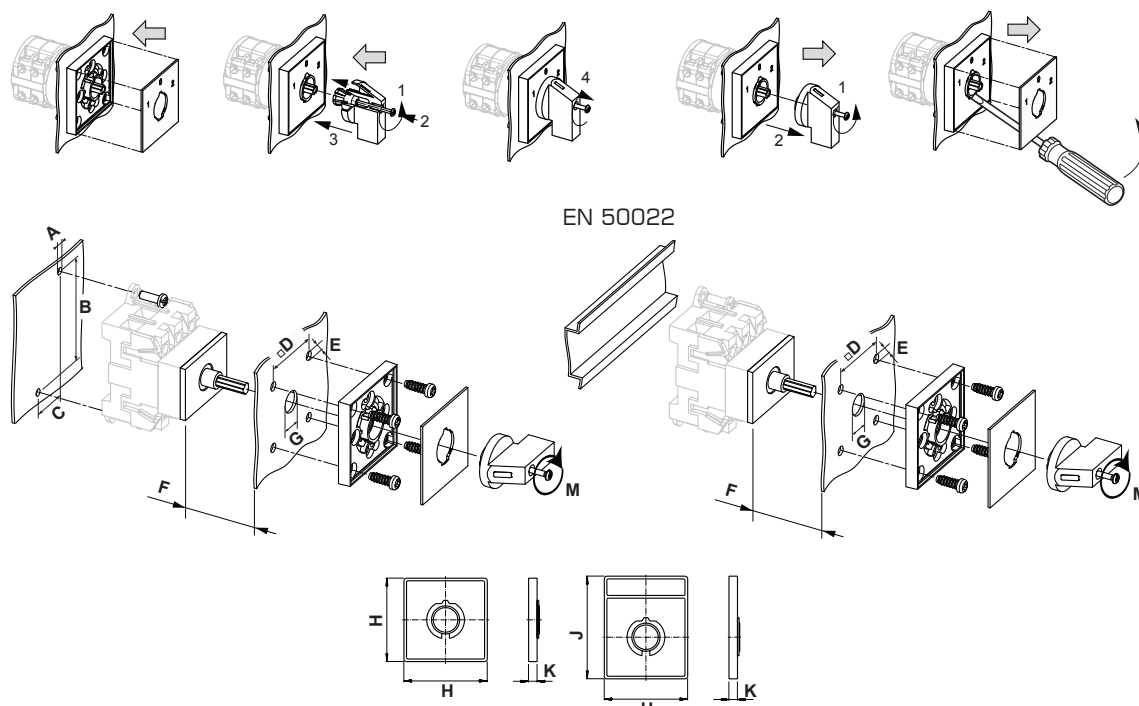

IP - Код лицевая сторона		IP40
Stages		1,00 - 5,00
A	Ø	5,20 mm
B	H	90,00 mm
B-tol.	H	± 1,00 mm
C	H	25,00 mm
C-tol.	H	± 0,50 mm
D	□	48,00 mm
E	Ø	5,00 mm
F	H	<= 13,50 mm
G	Ø	10,00 - 15,00 mm
H	H	64,00 mm
J	H	78,00 mm
K	H	7,40 mm
M	⌘	0,70 Nm



Wiring diagram

KG100.T304.VE



Switch program

KG100.T304.VE

 Kraus & Naimer		KG100 T304 VE Page 1 of 1							
Face Plate									
		L1 1	L2 3	L3 5	N 7	9	11	13	15
									
Switching Angle 90 Total switching Angle 90		2 T1	4 T2	6 T3	8 N	10	12	14	16
0	270								
1	0								
	90								
	180								

Version: 94

Face plate

S1.F456/C10.V11H





Sample image

PADLOCK DEVICE

with F-handle ring

Designation: S1.V840G/A71/B2

Colour of F-handle ring: "A" black

Colour of face ring: "7" electro-grey

Locking position: "1" at 270° (1x90°)

Type of mounting: "B" for type of mounting VE

Switch type: "2" for KA-, KG- and KH(R)-switches



MOUNTING

1 + 2 The padlock device has to be mounted by four cylinder head screws from the front.

3 Loosen the screw and

4 Push it into the handle onto the shaft

5 Fasten the screw.



1 Loose handle screw

2 remove handle.

3 Insert a proper auxiliary tool at those points of the frame of the device which are marked by a screw driver on the drawing and remove the frame.

4 Fixing screws can be loosen now.



Sample image

STANDARD DOOR CLUTCH

with shaft extension/asymmetric profile (with arresting screw)

Designation: S1.M280E/B21S-EF

Type of interlock: "B2" with protected profile and interlock by door clutch


Shaft length: "1" 32 - 57 mm

Application: "S" for type of mounting VE

Type of version: "-EF" splash proof (IP66/67)




A	□	48,00 mm	B	∅	5,00 mm	C	∅	19,00 - 22,00 mm
D	H	4,00 mm						

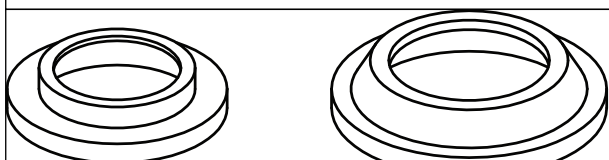

S2D V840 10

S3D V840 10

If S2 V840D or S2/S3 V845 will be applied with M280D, M280E or M280F, separately delivered parts S2D V840 10 resp. S3D V840 10 are not needed.

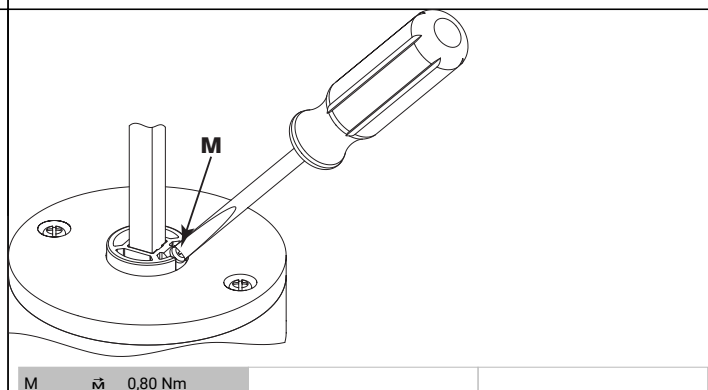

1. Loosen the screw
2. Move shaft
3. Tighten the screw