


# NatureConnect

by Signify

## Daylight W60L60 driver Standalone

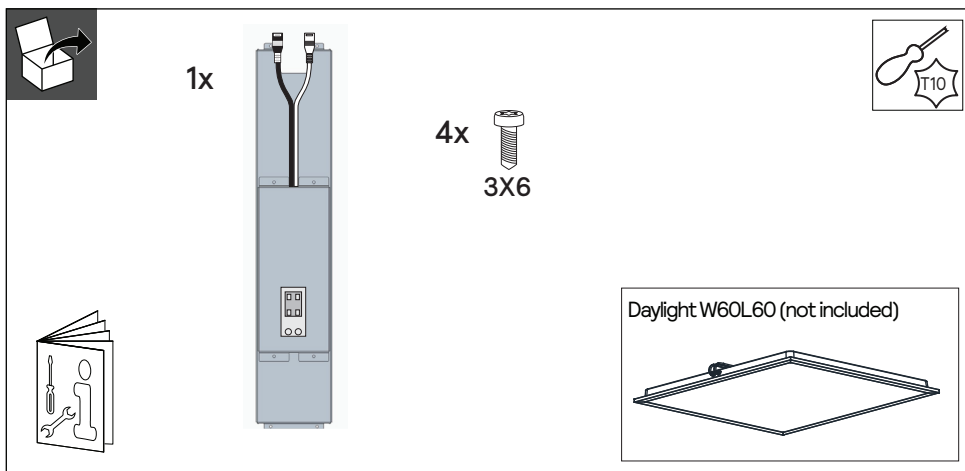

220 V  
240 V

50Hz  
60Hz




IP20


IK02




|                                   | Power (W) | Output current (A) | Voltage (V) | Dimensions<br>LxWxH (mm) | kg  |
|-----------------------------------|-----------|--------------------|-------------|--------------------------|-----|
| Daylight W60L60 driver Standalone | 33        | max. 2x 0.34       | max. 60     | 585x114x72               | 1,5 |

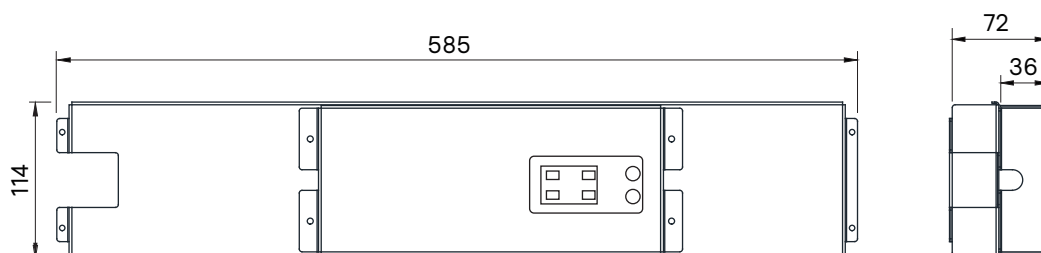


### Fix driver geartray to the Daylight W60L60

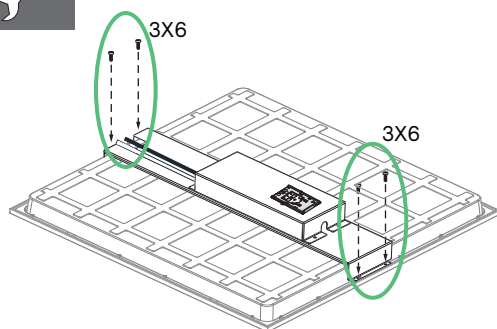

### Connection to mains

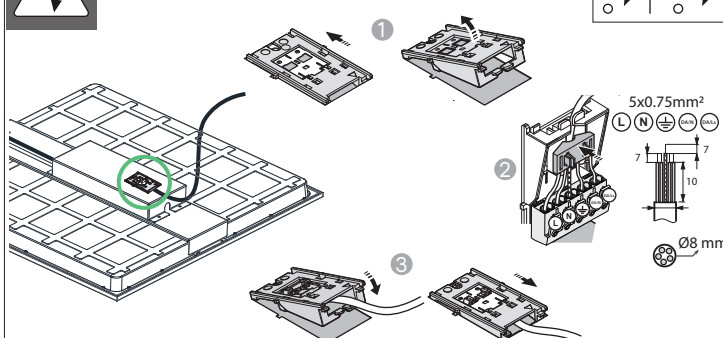

### Inrush current



### Electrical characteristics

|            |                         |
|------------|-------------------------|
| I max (A)  | 8                       |
| T ref (Us) | 175                     |
| <b>MCB</b> | <b>Max n. of lumin.</b> |
| B-10 A     | 48                      |
| B-16 A     | 77                      |
| C-10 A     | 50                      |
| C-16 A     | 80                      |



ATTENTION  
OBSERVE PRECAUTIONS  
FOR HANDLING  
ELECTROSTATIC  
SENSITIVE  
DEVICES

- The driver shall be installed by a qualified electrician and wired in accordance with the latest IEE electrical regulations or the national requirements.
- If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer, his service agent or similar qualified person in order to avoid hazard.
- The product is IPX0 & as such is not protected against water ingress & as such we strongly recommend that the environment in which the luminaire is to be installed is suitably checked.
- If the above advice is not taken and the luminaires are subject to water ingress, Signify cannot guarantee safe failure & product warranty will become void.