

Sample image

Datasheet

Article number: 70025937

Designation: CH10.A220*NLB408.FT2

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
690 AC / DC					
Rated uninterrupted current Iu/Ith					
Current (A)	Ambient temperature (°C)	Peak temperature (°C)	additional requirements		
20	55	60	Ambient temperature +55°C during 24 hours with peaks up to +60°C		
Rated operational current Ie					
Utilization category			Voltage (V)		Current (A)
AC-15			220 - 240		6
AC-15			380 - 440		4
Rated operational power					
Utilization category		Voltage (V)	No. of phases	No. of poles	Power (kW)
AC-3		220 - 240	3	3	3
AC-3		380 - 440	3	3	5,50
AC-3		660 - 690	3	3	5,50
AC-3		220 - 240	1	2	2,20
AC-3		380 - 440	1	2	3
AC-23A		220 - 240	3	3	3,70
AC-23A		380 - 440	3	3	7,50
AC-23A		660 - 690	3	3	7,50
AC-23A		220 - 240	1	2	2,50
AC-23A		380 - 440	1	2	3,70
Max Fuse Rating IEC					
Fuse characteristic			No. of Fuses		Current (A)
gG			1		25
UL60947-4-1 , UL508					
Nominal Voltage					
Voltage (V) AC / DC					
600 AC					
Rated insulation voltage Ui					
Voltage (V) AC / DC					
600 AC					
Rated thermal current					
Current (A)		Ambient temperature (°C)		Additional Text	
20		0 - 40		–	
Horsepower rating					
Across-the-Line Motor Starting		Voltage (V)	No. of phases	No. of poles	Power (HP)
DOL		110 - 120	1	2	0,50
DOL		220 - 240	1	2	1
DOL		277 - 277	1	2	2
DOL		440 - 480	1	2	2
DOL		550 - 600	1	2	2
DOL		110 - 120	3	3	1,50
DOL		220 - 240	3	3	3
DOL		440 - 480	3	3	5
DOL		550 - 600	3	3	5
Pilot duty rating code					
Duty Code					
A600					
SCCR / Max. fuse rating					
Conditions of acceptability					
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses.					
Temp. rating of wire					
Temperature rating (°C)			Current (A) Text		
60 - 75			– Use copper wire only		
General Use					
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	277	20	1	1	1
AC	600	20	1	2	1

General Use								
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series			
AC	600	20	3	3	1			
CSA								
Nominal Voltage								
				Voltage (V)	AC / DC			
				600 AC				
Rated insulation voltage Ui								
				Voltage (V)	AC / DC			
				600 AC				
Rated thermal current								
		Current (A)	Ambient temperature (°C)		Additional Text			
		20	0 - 40		--			
Horsepower rating								
Across-the-Line Motor Starting				Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL				110 - 120	1	2	0,50	40
DOL				220 - 240	1	2	1	40
DOL				277 - 277	1	2	2	40
DOL				440 - 480	1	2	2	40
DOL				550 - 600	1	2	2	40
DOL				110 - 120	3	3	1,50	40
DOL				220 - 240	3	3	3	40
DOL				440 - 480	3	3	5	40
DOL				550 - 600	3	3	5	40
Pilot duty rating code								
Duty Code								
A600								
Temp. rating of wire								
			Temperature rating (°C)	Current (A)		Text		
			75			-- --		
General Use								
AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series			
AC	277	20	1	1	1			
AC	600	20	1	2	1			
AC	600	20	3	3	1			
GENERAL TECHNICAL INFORMATION								
Tightening torque of screws								
			tightening torque (Nm)		tightening torque (lb-in)			
			1		9			
Stripping length								
			Length (mm) --					
			9 STRIPPINGLENGTH					
Size of conductor								
composition of conductor		Min. / Max. value	No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)		Material of the wire	
solid wire		Min.	1		0.75mm²		Copper	
solid wire		Min.	2		0.75mm²		Copper	
flexible wire		Min.	1		0.75mm²		Copper	
flexible wire		Min.	2		0.75mm²		Copper	
flexible wire		Max.	2		AWG 12		Copper	
flexible wire		Max.	2		2.5mm²		Copper	
Single-core or stranded wire		Max.	2		AWG 10		Copper	
Single-core or stranded wire		Max.	2		4mm²		Copper	
flexible wire with ferrule according to DIN 46228		Min.	1		0.75mm²		Copper	
flexible wire with ferrule according to DIN 46228		Min.	2		0.75mm²		Copper	
flexible wire with ferrule according to DIN 46228		Max.	2		2.5mm²		Copper	
Approbations								
Specification					Marking			
EAC								
CE marking								
UK Directives								
CSA C.22.2 No.14								
GB/T14048.3								
Recommended screw driver								
Type of screw driver				Value				
Cross Screwdriver				PH1				
Slot screwdriver according to DIN 5264				0,8x4				
General Information								
Text								
- Do not lubricate or treat contacts.								

General Information

Text

- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.
- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65


Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal


Mounting-FT2

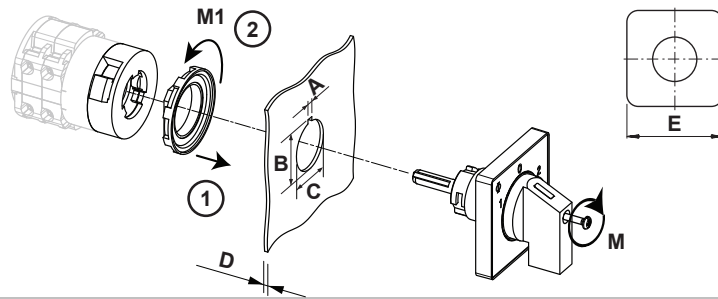

IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	H	3,20 mm
A+_tol.	H	0,20 mm
A-_tol.	H	0,00 mm
B	H	24,10 mm
B+_tol.	H	0,40 mm
B-_tol.	H	0,00 mm
C	Ø	22,30 mm
C+_tol.	Ø	0,40 mm
C-_tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	M̄	0,50 Nm
M1	M̄	1,80 Nm

Wiring diagram

CH10.A220.FT2

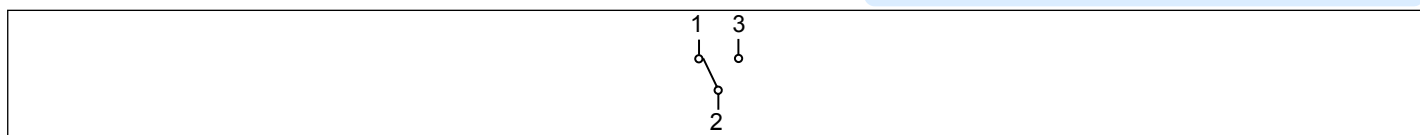

Switch program

CH10.A220.FT2


 Kraus & Naimer


		CH10		A220		Page 1 of 1							
Face Plate													
		1	3	5	7	9	11	13	15	17	19	21	23
													
Switching Angle 60 Total switching Angle 60		2	4	6	8	10	12	14	16	18	20	22	24
1		330											
		345											
		0											
		15											
2		30											
		45											
		60											
		75											
		90											
		105											
		120											
		135											
		150											
		165											
		180											
		195											
		210											
		225											
		240											
		255											
		270											
		285											
		300											
		315											

Version: 106

Face plate

S0.F072/A10.E1L

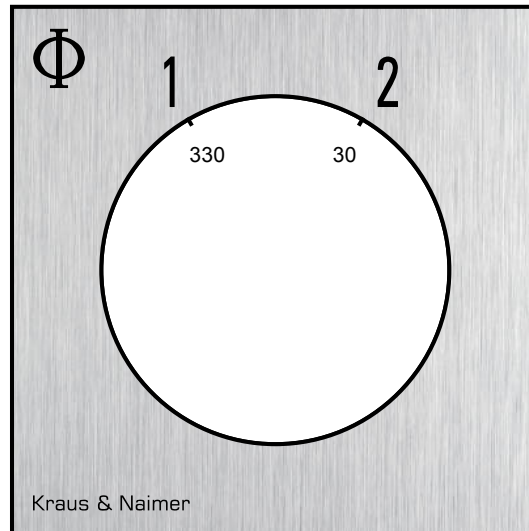



Sample image

KEY-LOCK DEVICE with small cylinder lock (Eurolock-Lock) for type of mounting FT, *FT1, *FT2, *FT6, *FH3, *FH4, *VE1F, *VE21

Designation: S0.V750D/3J/21

Lock cylinder: "3" lock cylinder S0 (KN 101)

Locking program: "J"

09:00+11:00+01:00+03:00+05:00+07:00

Type of mounting: "2" for type of mounting

*FT2/*FT2-V (22 mm)

Colour of face plate frame: "1" black (not for type
of mounting *VE21)

