



Sample image

Datasheet

Article number: 70002220

Designation: CA10.A211.FT2

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Rated insulation voltage Ui

Voltage (V) AC / DC
690 AC / DC

Rated impulse withstand voltage Uimp

Voltage (kV)	Overvoltage category	Pollution degree	Supply system	Function
4 III	3	Valid for lines with grounded common neutral termination	Switch disconnecter	

Rated uninterrupted current Iu/Ith

Current (A)	Ambient temperature (°C)	Peak temperature (°C) additional requirements
20	55	60 Ambient temperature +55°C during 24 hours with peaks up to +60°C

Rated operational current Ie

Utilization category	Voltage (V)	Current (A)
AC-15	220 - 240	6
AC-15	380 - 440	4

Rated operational power

Utilization category	Voltage (V)	No. of phases	No. of poles	Power (kW)
AC-3	220 - 240	3	3	3
AC-3	380 - 440	3	3	5,50
AC-3	660 - 690	3	3	5,50
AC-3	220 - 240	1	2	2,20
AC-3	380 - 440	1	2	3
AC-23A	220 - 240	3	3	3,70
AC-23A	380 - 440	3	3	7,50
AC-23A	660 - 690	3	3	7,50
AC-23A	220 - 240	1	2	2,50
AC-23A	380 - 440	1	2	3,70

Max Fuse Rating IEC

Fuse characteristic	No. of Fuses	Current (A)
gG	1	25

UL60947-4-1, UL508

Nominal Voltage

Voltage (V) AC / DC
300 AC / DC

Rated insulation voltage Ui

Voltage (V) AC / DC
300 AC

Rated thermal current

Current (A)	Ambient temperature (°C) Additional Text
20	0 - 40 --

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
Reversing	110 - 120	1	2	0,17	40
Reversing	220 - 240	1	2	0,50	40
Reversing	277 - 277	1	2	0,60	40
Reversing	110 - 120	3	3	0,50	40
Reversing	220 - 240	3	3	1	40
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40

Pilot duty rating code

Duty Code
A300

SCCR / Max. fuse rating

Conditions of acceptability

These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.

Temp. rating of wire

Temperature rating (°C)	Current (A) Text
60 - 75	-- Use copper wire only

Connecting instructions
Markings

When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	300	20	1	2	1
AC	300	20	3	3	1

CSA
Nominal Voltage

Voltage (V)	AC / DC
300	AC

Rated insulation voltage Ui

Voltage (V)	AC / DC
300	AC

Rated thermal current

Current (A)	Ambient temperature (°C)	Additional Text
20	0 - 40	--

Horsepower rating

Across-the-Line Motor Starting	Voltage (V)	No. of phases	No. of poles	Power (HP)	Ambient temperature [°C]
DOL	110 - 120	1	2	0,50	40
DOL	220 - 240	1	2	1	40
DOL	277 - 277	1	2	2	40
DOL	110 - 120	3	3	1,50	40
DOL	220 - 240	3	3	3	40

Pilot duty rating code
Duty Code

A300

Temp. rating of wire

Temperature rating (°C)	Current (A)	Text
75	--	only

General Use

AC / DC	Voltage (V)	Current (A)	No. of phases	No. of poles	No. of contacts in series
AC	300	20	1	1	1

GENERAL TECHNICAL INFORMATION
Tightening torque of screws

tightening torque (Nm)	tightening torque (lb-in)
0,60	5

Stripping length

Length (mm)	--
8	STRIPPINGLENGTH

Size of conductor

composition of conductor	Min. / Max. value	No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)	Material of the wire
solid wire	Min.	1	0.5mm²	Copper
solid wire	Min.	2	0.5mm²	Copper
flexible wire	Min.	1	0.75mm²	Copper
flexible wire	Min.	2	0.75mm²	Copper
flexible wire	Max.	2	2.5mm²	Copper
flexible wire	Max.	2	AWG 14	Copper
Single-core or stranded wire	Max.	2	AWG 12	Copper
Single-core or stranded wire	Max.	2	2.5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	1	0.5mm²	Copper
flexible wire with ferrule according to DIN 46228	Max.	2	2.5mm²	Copper
flexible wire with ferrule according to DIN 46228	Min.	2	0.5mm²	Copper

Approbations
Specification

EAC

CE marking

UK Directives

CSA C.22.2 No.14

GB/T14048.3

Recommended screw driver

Type of screw driver	Value
Cross Screwdriver	PH1
Slot screwdriver according to DIN 5264	0,8x4

General Information
Text

- Do not lubricate or treat contacts.
- Switches may only be mounted, connected and set into operation by qualified persons according to the accepted rules of technology.

Marking


General Information

Text

- Use copper wire only. Do not coat the wire end with tin.
- Terminals with factory fitted jumper links are tightened during production. Take care during installation to ensure factory fitted links are not lost by undoing both sides of linked terminals. After wiring, all terminal screws must be tightened to recommended torque specifications.
- After installation of the switches the spacings between the terminals must be sufficient to fulfill the requirement of the applicable standards.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Classification Contact: Rigid contact bridge

Classification Contact Mat: Silver

Classification Terminal: Screw terminal

Mounting-FT2

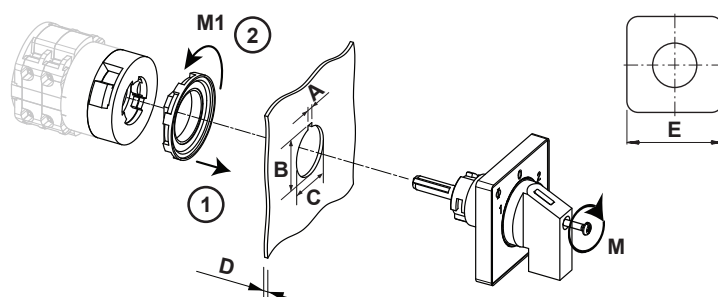


IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	H	3,20 mm
A+_tol.	H	0,20 mm
A-_tol.	H	0,00 mm
B	H	24,10 mm
B+_tol.	H	0,40 mm
B-_tol.	H	0,00 mm
C	Ø	22,30 mm
C+_tol.	Ø	0,40 mm
C-_tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	↺	0,50 Nm
M1	↺	1,80 Nm



Wiring diagram

CA10.A211.FT2



Switch program

CA10.A211.FT2



Kraus & Naimer

CA10
A211
Page 1 of 1

Face Plate																										
		1		3		5		7		9		11		13		15		17		19		21		23		
																										
Switching Angle 60 Total switching Angle 120		2		4		6		8		10		12		14		16		18		20		22		24		
1	300																									
	315																									
	330																									
	345																									
	0	0																								
		15																								
		30																								
		45																								
	2	60																								
		75																								
		90																								
		105																								
		120																								
		135																								
		150																								
		165																								
		180																								
		195																								
	210																									
	225																									
	240																									
	255																									
	270																									
	285																									

Version: 109

Face plate

S0.F071/A10.E1L



HANDLES

Designation: S0C.G251

Handle colour: "1" black

