



Sample image

Datasheet

Article number: 70011009

Designation: KG10A.T102/04.FT2

Description: Switch Global Disconnecter

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107						
Tension assignée d'isolement Ui						
Tension (V) AC / DC						
690 AC						
Courant ininterrompu et thermique conventionnel Iu/Ith						
Intensité (A)	Température Ambiante (°)	Température Maxi (°)	Spécification complémentaire			
20	50	55	Température ambiante +50°C durant 24 heures avec point à +55°C			
Courant assigné d'emploi Ie						
Catégorie d'emploi		Tension (V)		Intensité (A)		
AC-15		220 - 240		6		
AC-15		380 - 440		4		
Puissance assignée d'emploi						
Catégorie d'emploi	Tension (V)	Nb de phases	Nb de pôles	Puissance (kW)		
AC-3	220 - 240	3	3	2,20		
AC-3	380 - 440	3	3	3,70		
AC-3	660 - 690	3	3	3,70		
AC-3	220 - 240	1	2	1,10		
AC-3	380 - 440	1	2	1,50		
AC-23A	220 - 240	3	3	3		
AC-23A	380 - 440	3	3	5,50		
AC-23A	660 - 690	3	3	5,50		
AC-23A	220 - 240	1	2	1,50		
AC-23A	380 - 440	1	2	2,20		
Protection par fusible (IEC)						
Caractéri		Nombre de fusible		Intensité (A)		
gG		1		20		
UL60947-4-1 , UL508						
Nominal Voltage						
Tension (V) AC / DC						
300 AC						
Tension assignée d'isolement Ui						
Tension (V) AC / DC						
300 AC						
Rated thermal current						
Intensité (A)		Température Ambiante (°) Additional Text				
20		0 - 40 --				
Horsepower rating						
Across-the-Line Motor Starting		Tension (V)	Nb de phases	Nb de pôles	Power (HP)	Ambient temperature [°C]
DOL		110 - 220	1	2	0,50	40
DOL		220 - 240	1	2	1	40
DOL		277 - 277	1	2	1	40
DOL		110 - 120	3	3	1	40
DOL		220 - 240	3	3	2	40
Pilot duty rating code						
Duty Code						
A300						
SCCR / Max. fuse rating						
Conditions of acceptability						
These devices are suitable for use on circuits capable of delivering not more than 5kA rms symmetrical amperes, 300V ac max. when protected by Class J fuses.						
Temp. rating of wire						
Temperature rating (°C)		Intensité (A) Text				
60 - 75		-- Use copper wire only				
Connecting instructions						
Markings						
Break all lines.						
For use on a flat surface of a type 1 enclosure.						
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	277	20	1	1	1	

General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	300	20	1	2	1	
AC	300	20	1	2	1	
AC	300	20	3	3	1	
General Information						
Text						
- The operating handle and position indicating means to be used with these manual motor controllers should be provided from the manufacturer, or the operating handle and position indicating means to be used should have been previously evaluated in combination with the manual motor controllers.						
- When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
CSA						
Nominal Voltage						
			Tension (V) AC / DC			
			300 AC			
Tension assignée d'isolement Ui						
			Tension (V) AC / DC			
			300 AC			
Rated thermal current						
		Intensité (A)	Température Ambiante (°)		Additional Text	
		20	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting			Tension (V)	Nb de phases	Nb de pôles	Power (HP)
DOL			110 - 220	1	2	0,50
DOL			220 - 240	1	2	1
DOL			277 - 277	1	2	1
DOL			110 - 120	3	3	1
DOL			220 - 240	3	3	2
Pilot duty rating code						
Duty Code						
A300						
Temp. rating of wire						
			Temperature rating (°C)	Intensité (A)	Text	
			75	--	--	
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	277	20	1	1	1	
AC	277	20	3	3	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			0,60		5	
Stripping length						
			Length (mm) --			
			8 STRIPPINGLENGTH			
Size of conductor						
composition of conductor	Min. / Max. value		No. of conductor per terminal	Cross section (mm²) or (AWG/kcmil)		Material of the wire
solid wire	Min.		1	0,5mm²		Copper
solid wire	Min.		2	0,5mm²		Copper
flexible wire	Min.		1	0,75mm²		Copper
flexible wire	Min.		2	0,75mm²		Copper
flexible wire	Max.		1	AWG 12		Copper
flexible wire	Max.		1	2,5mm²		Copper
Single-core or stranded wire	Max.		1	AWG 12		Copper
Single-core or stranded wire	Max.		1	2,5mm²		Copper
flexible wire with ferrule according to DIN 46228	Max.		1	2,5mm²		Copper
flexible wire with ferrule according to DIN 46228	Min.		1	0,5mm²		Copper
flexible wire with ferrule according to DIN 46228	Min.		2	0,5mm²		Copper
Approbations						
Specification						Marking
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Recommandations concernant le tournevis						
Type	Value					
Tournevis cruciforme	PH1					
Slot screwdriver according to DIN 5264	0,8x4					
General Information						
Text						
- Ne jamais lubrifier ou traiter les contacts.						

General Information

Text

- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.
- Use copper wire only. Do not coat the wire end with tin.
- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.
- Après mise en place des les commutateurs l'espace entre bornes doit être suffisant pour répondre aux exigences des normes en vigueur.

Waste Electrical & Electronic Equipment (WEEE)

Picture name	Description
	Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name	Description
	WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov .

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal

Fixation-FT2




IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	H	3,20 mm
A+_tol.	H	0,20 mm
A-_tol.	H	0,00 mm
B	H	24,10 mm
B+_tol.	H	0,40 mm
B-_tol.	H	0,00 mm
C	Ø	22,30 mm
C+_tol.	Ø	0,40 mm
C-_tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	M̄	0,50 Nm
M1	M̄	1,80 Nm



Wiring diagram

KG10A.T302.FT2

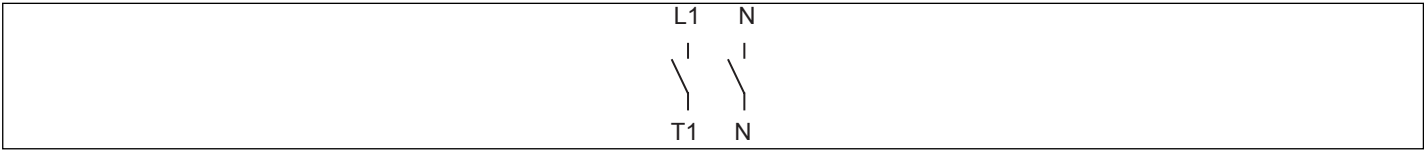

Switch program

KG10A.T302.FT2



Kraus & Naimer


KG10A
T302E
Page 1 of 1

Face Plate													
		N	T1										
		1	3	5	7	9	11	13	15	17	19	21	23
		Marking plate: S0D H043 51F											
													
Switching Angle	90	2	4	6	8	10	12	14	16	18	20	22	24
Total switching Angle	90	N	L1										
0	270												
	285												
	300												
	315												
	330												
	345												
1	0												
	15												
	30												
	45												
	60												
	75												
	90												
	105												
	120												
	135												
	150												
	165												
	180												
	195												
	210												
	225												
	240												
	255												

Version: 2

Face plate

S0.F456/A10.E1LH

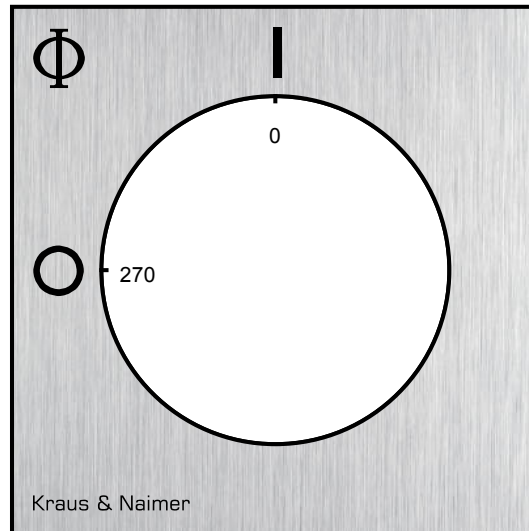


Designation: S0.V845/A11/D11

Angular displacement: "1" 1 x 90°

Type of version: "1" for same switch size

Switch type: "1" for C-switches and for KG10.

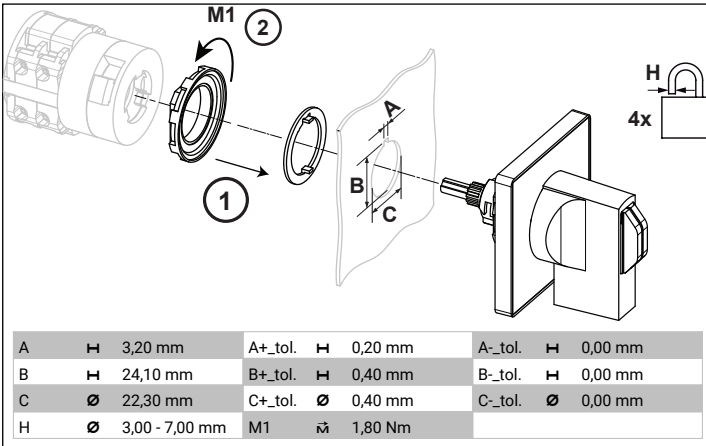

A	H	3,20 mm	A+.tol.	H	0,20 mm	A-.tol.	H	0,00 mm
B	H	24,10 mm	B+.tol.	H	0,40 mm	B-.tol.	H	0,00 mm
C	Ø	22,30 mm	C+.tol.	Ø	0,40 mm	C-.tol.	Ø	0,00 mm
H	Ø	3,00 - 7,00 mm	M1	↺	1,80 Nm			