


## PRODUCT DATASHEET

**Type:** ET-RRU-1500  
**Art. Nr.:** 40532



### Short description

Finned tube heater without controls, 1.5kW, IP66/67, 230V

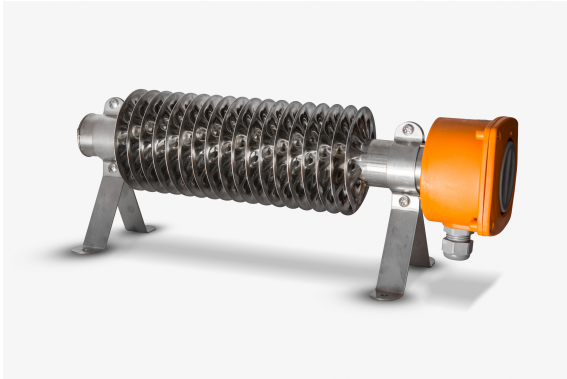

### Product Description

For heating damp rooms, e.g. greenhouses, protecting sensitive systems from frost, heating in harsh operating environments, e.g. pumping stations, crane cabins, construction trailers and foremen's offices in factory halls. Optimum heat dissipation thanks to the large surface area of the folding fins. The built-in heating element made of technical ceramics ensures good heat distribution. Robust radiator made of stainless steel, material 1.4512, all parts rustproof, all mounting points dustproof and waterproof, for wall and floor mounting. Without control, surface temperature: max. 185 °C, CE compliant, test mark: KEMA-KEUR, protection class: IP 66/67, connection: hard wiring or plug.

### ETIM characteristics

|                                                         |           |                     |                |
|---------------------------------------------------------|-----------|---------------------|----------------|
| <b>Automatic temperature controller</b>                 | ✗         | <b>Power</b>        | 1500 Watt      |
| <b>Low surface temperature</b>                          | ✗         | <b>Rib diameter</b> | 120 Millimetre |
| <b>Universal connectable</b>                            | ✓         | <b>Voltage</b>      | 230 230 Volt   |
| <b>Degree of protection (IP)</b>                        | IP66/IP67 | <b>Height</b>       | 184 Millimetre |
| <b>Explosion-proof</b>                                  | ✗         | <b>Width</b>        | 120 Millimetre |
| <b>For Ex-zone gas</b>                                  | None      | <b>Length</b>       | 900 Millimetre |
| <b>For Ex-zone dust</b>                                 | None      |                     |                |
| <b>Temperature class according to directive 94/9/EC</b> | None      |                     |                |

Created on: 09/10/2024