

Flush-mounting RF receiver with roller shutter function

05-333

4 year warranty

This mini-receiver is used to control roller shutters and blinds. It is very easy to mount due to its compact dimensions. It works with both wall-mounted and hand-held transmitters. The run time is 90 seconds. With the 2-button mode, you can:

- open, close and stop the roller shutters and blinds;
- turn the vertical blind slats.

Technical data


Flush-mounting RF receiver with roller shutter function

- Max. 32 transmitters per receiver
- Max. switching current: 4 A/ 230 Vac
- Power supply: 230 V 50 Hz
- Max. transmission range in a building: 30 m
- Max. transmission range in open field: 100 m
- Modulation type: FSK
- Not compatible with the wireless bridge
- Maximum MCB rating: 6 A (limited by national installation rules)
- Communication protocol: Easywave
- Operating frequency: 868.3 GHz
- Weight: 76 g
- Dimensions (HxWxD): 49 x 70 x 29 mm
- Marking: CE



CE

Wiring diagram

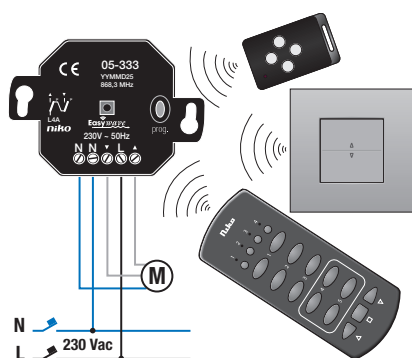

www.niko.eu

niko

05-333 - 27-06-2023