


EU xComfort CAAE-01/01, CAAE-01/03

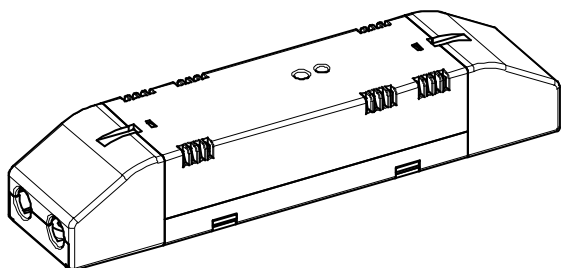


MRF EATON	Min. V 1.60	CAAE-01/01
MRF EATON	Min. V 1.55	CAAE-01/03
HM RF	Min. V 3.5B	CAAE-01/01 + CAAE-01/03




	1,5 mm ²
	6 mm

IP20


868,3 MHz

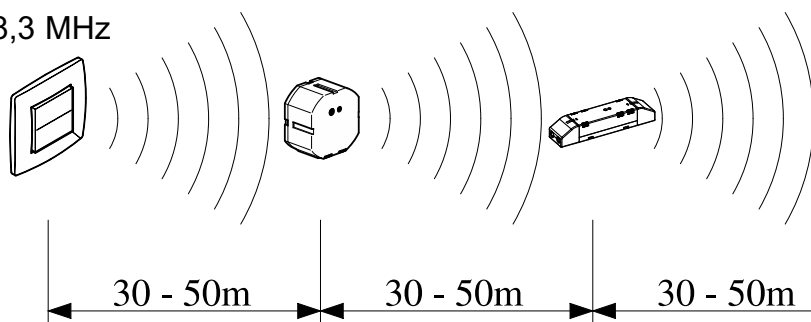

	T=-25°C - +70°C
	T=-5°C - +45°C

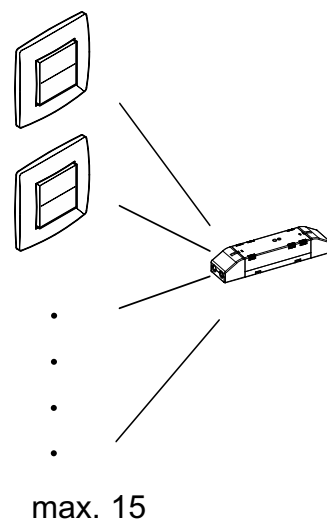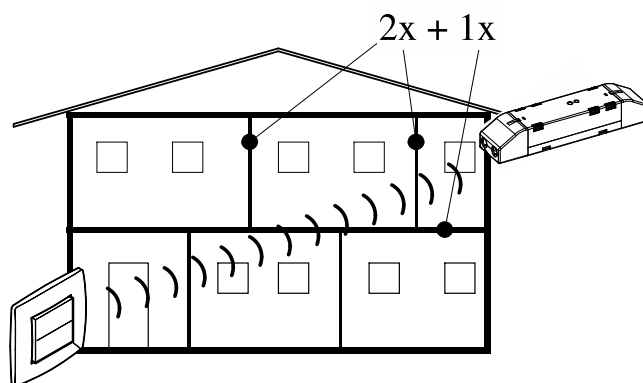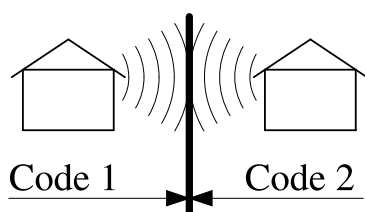

~ 60-90%	~ 80-95%	~ 20-60%	~ 0-10%	~ 70-90%

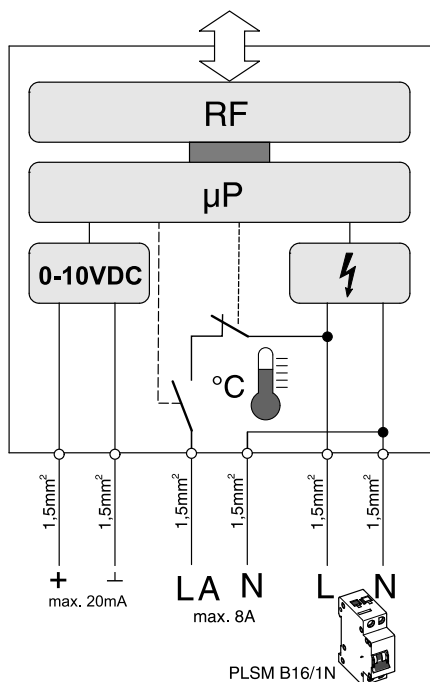

	1,5 mm ²
	6 mm



Declaration of Conformity

We, EATON Industries (Austria) GmbH
3943 Schrems, Eugenia 1
Austria

declare under our sole responsibility that the product (family)

**Eaton - Analog actuator,
CAAE-...**

(the declaration of conformity applies to all
listed types within our actual product catalogue)

provided that it is installed, maintained and used in the
application intended for, with respect to the relevant manufacturers
instructions, installation standards and "good engineering practices"

complies with the provisions of Council directive(s):

RED Directive 2014/53/EU

RoHS Directive 2011/65/EU

based on compliance with following standard(s):

EN 301489-3 V2.1.1, EN 300220-2 V3.1.1, EN 50491-5-1:2010, EN
50491-5-2:2010, EN 62479:2010, EN 50428:2005 + A1:2007 + A2:2009,
EN 50581:2012

EU- type examination performed by:
TÜV Austria Services GmbH, Notified Body
1230 Vienna, Deutschstrasse 10, Austria

Affixing date of CE mark: 2005
Doc.Id.: CAAE-..._171117

Fernando Ceccarelli
Senior Vice President
General Manager


17.11.2017

Friedrich Schröder
Director Quality
& Systems




L1 N PE


max. 20m
(e.g. CAT5)

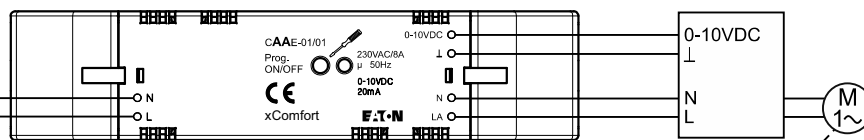


max. 20m
(e.g. CAT5)

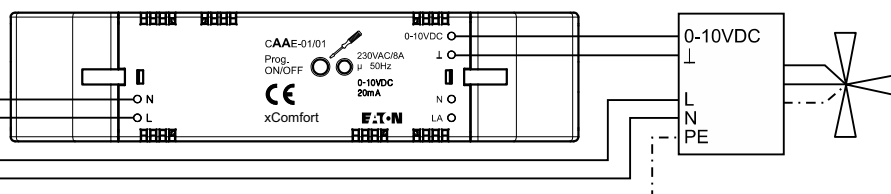

max. 20m
(e.g. CAT5)

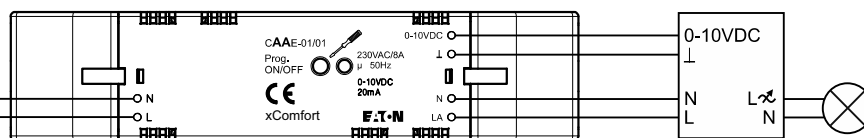


max. 20m
(e.g. CAT5)

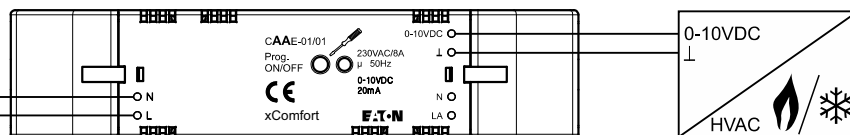


L1 N PE


max. 20m
(e.g. CAT5)

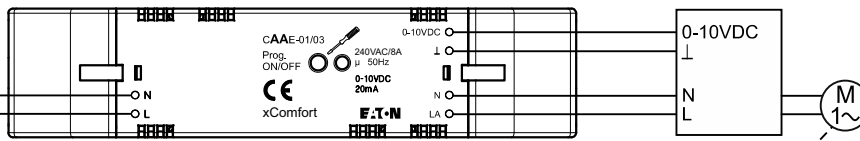


max. 20m
(e.g. CAT5)

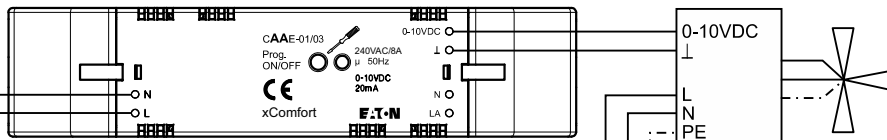

max. 20m
(e.g. CAT5)

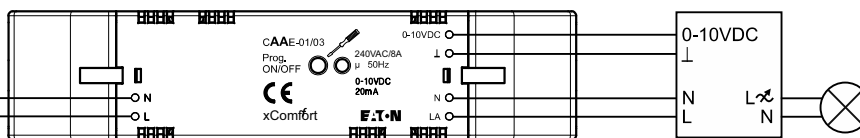

max. 20m
(e.g. CAT5)

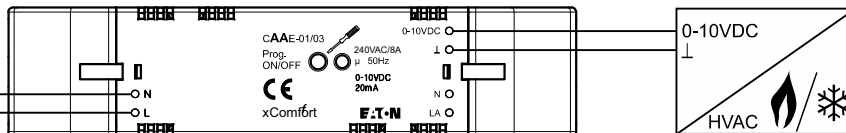

RF- SYSTEM

BASIC - MODE - CARD

