



# MINIDISC REMOTE INDICATOR

## FUNCTION

The MiniDisc remote indicator is a light-weight, compact indicator for use in fire protection systems.


The indicator may be used in all installations incorporating Apollo detectors, including Series 65™, AlarmSense®, Orbis®, XPlover, XP95®, Discovery® and I.S. detectors.

## FEATURES

The MiniDisc remote indicator is only 20mm high and 80mm in diameter. It comprises two parts—the base which is installed onto a wall or soffit and the lid which is fitted to the base with a bayonet lock.

An anti-tamper screw in the lid locks the unit together. A 1.5mm hexagonal driver, part number 29600-095, is available from Apollo.

Two pairs of keyholes are provided—one for 50mm and the other for 60mm fixing centres.

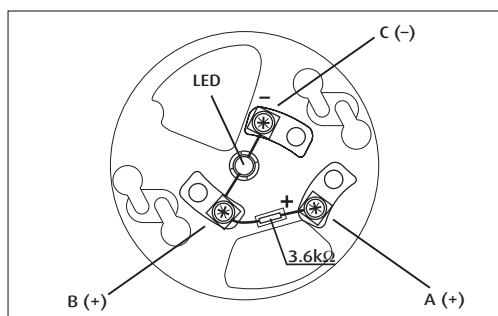

*The MiniDisc Remote Indicator is polarity sensitive. Connect positive line to Terminal A or B and negative line to Terminal C (See table opposite)*



Part no: 53832-070

## ELECTRICAL CONNECTIONS

### Detector Range Connections

|                          |       |
|--------------------------|-------|
| Series 65                | A & C |
| AlarmSense               | B & C |
| Orbis                    | A & C |
| Orbis Intrinsically Safe | A & C |
| XPlover                  | A & C |
| XP95                     | A & C |
| Discovery                | A & C |
| XP95 Intrinsically Safe  | B & C |

|                       |                  |
|-----------------------|------------------|
| Voltage, A & C        | 5–36V            |
| Max current, B & C    | 25mA, up to 40°C |
| Operating temperature | –10° to +60°C    |



A HALMA COMPANY

©Apollo Fire Detectors Limited 1997-2008

#### Overseas offices:

America | China | Germany | Ireland | Spain

36 Brookside Road, Havant,  
Hampshire, PO9 1JR, UK.

Tel: +44 (0)23 9249 2412  
Fax: +44 (0)23 9249 2754

Email: sales@apollo-fire.co.uk  
Web: www.apollo-fire.co.uk