

RICOMAN®

Remote Control for Centorio All In One LED Downlight



OPERATION INSTRUCTIONS



Please read carefully before use and leave a copy for the user/maintenance engineer for future reference.

PRODUCT FEATURES

- This control is to use with Centorio Downlight only
- Product Code: R09-88
- Colour temperature range: 3000K -5000K
- Dimming range: 3% - 100%
- Can operate up to 100 downlights
- 4 channels available (4 rooms or 4 sections in a room)
- Maximum sensing range = 15 metres at 2.4GHz
- Night light function (3% dim)
- Luminescent keypad
- Batteries not included

BUTTON FUNCTIONS

Master ON

Press and ALL lights will switch on.
Press and hold to automatically increase luminaire(s) to synchronisation.

CT WW

Press to adjust the light to a warmer colour temperature.

CT CW

Press to adjust the light to a cooler colour temperature.

Master OFF

Press and ALL lights will switch off.
Press and hold to put luminaire(s) into night light mode (3% light output).

Light +


Press to increase the light brightness.

Light -

Press to decrease the light brightness.

Channel ON/OFF

Individual control of channels 1, 2, 3 & 4. This button has the functions as Master ON/OFF but controlling the selected channel.

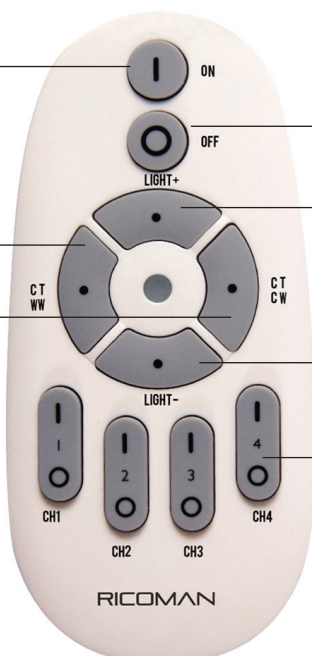

SYNCING AND GROUPING

- 1) Power off the luminaires to be synced for at least 10 seconds.
- 2) Power on these luminaires and within 3 seconds, quickly press the CH1/ON button once.
- 3) The luminaire(s) will then flash slowly 3 times to confirm that they are successfully synced.
- 4) Repeat the steps above if required for Channels 2, 3 and 4.

Reminder: fittings not responding may need to be reset before being synced. Please see below for instructions.

RESETTING AND RE-GROUPING

- 1) Power off the luminaires that need resetting for at least 10 seconds.
- 2) Power on these luminaires and within 3 seconds, press the Master ON or relevant CH/ON button 5 times in quick succession
- 3) The luminaire(s) will then flash 6 times to confirm that the lamps have reset successfully.
- 4) After resetting, lamps can be matched and regrouped by following the instructions for "Synchronising and Grouping".

OTHER FUNCTIONS

Memory Function:

The control keeps the last setting in memory. After adjusting each lamp to the required intensity and colour temperature, switch OFF using the remote controller. When lamps are switched back ON with the Remote Controller, the previous settings will be restored.

Channel Control:

To control ALL 4 channels at the same time press Master ON/OFF.

To control 2 or 3 channels at the same time press Master ON, then quickly switch OFF the channel(s) which is/are not required by pressing Channel OFF.

To control 1 Channel, just press Channel ON to select the lamps in that channel only. Then Light+, Light-, CT WW & CT CW to control selected downlighter(s).

Manual Switching:

If the Remote Control is lost, the colour temperature and mode can be changed manually by switching the wall switch OFF/ON in quick succession. The cycle order will be : 3000K, 4000K, night light and then 5000K.



ENVIRONMENTAL PROTECTION

Waste Electrical & Electronic Equipment Regulations (WEEE) requires that any of our products showing this marking must not be disposed of with other household or commercial waste. To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate any such product from other waste types and recycle it responsibly at your local facilities. Check with your Local Authority, Recycling Centre or retailer for recycling advice.

WARRANTY

This product is in warranty in the UK for a period of 3 year from the date of purchase. The guarantee is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label, installation in an improper working environment or installation not according to the current edition of the IEE Wiring Regulations. Should this product fail during the warranty period, it will be replaced free of charge, subject to the aforementioned conditions and return of the faulty unit. We do not accept responsibility for any installation costs associated with the replacement of this product. Your statutory rights are not affected.

