

Architectural Exterior Range

Installation guide for up/down lights



Important information

- It is recommended that luminaires are installed by a qualified electrician to ensure the installation complies with the local current wiring regulations.
- Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for claims arising from sub-standard installations.
- These products are designed for connection to a 100-277V~ 50/60Hz supply.
- The light source of this luminaire is not replaceable: When the light source reaches the end of its life, the whole of the luminaire must be replaced.
- This luminaire is suitable for indoor and outdoor use.
- It may be necessary to upgrade your MCBs to allow for increased inrush current.

INSTALLATION

ENGLISH


Specifications Colour temp: 3000K Ra: 80

Product code	Wattage	Lumens	LpcW
JC17010	5W	160	32
JC17011*	2 X 7W	1000	71
JC17012*	7W	550	79
JC17014	30W	TBC	TBC
JC17015*	2 X 4W	400	50
JC17016*	2 X 7W	800	57
JC17001*	7W	520	74
JC17035**	2 X 5W LED GU10	N/A	N/A

200-240V~ 50/60Hz / Class I

*100-277V~ 50/60Hz / Class I




Figure 1. Mains input



- Read instructions and check that you have all of the tools and accessories required to complete the installation correctly. Isolate power supply before starting the installation.


Installation procedure

- Remove body from base/back plate and use as a template for fixing ensuring correct orientation
- Feed cable through grommet, ensuring water tight prior to fixing in desired location.
- Terminate electrical connections as shown in Fig 1.
- Fit suitable LED lamp as required (max 5W GU10 LED).
- Refit body and secure with fixings.
- Turn on supply and test for operation.

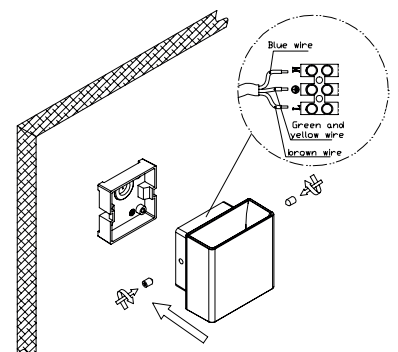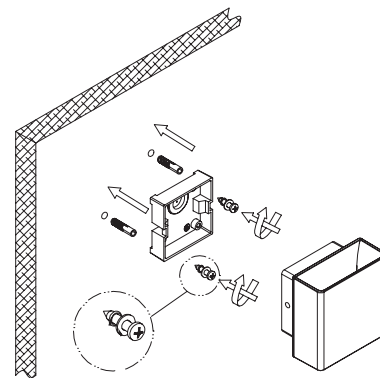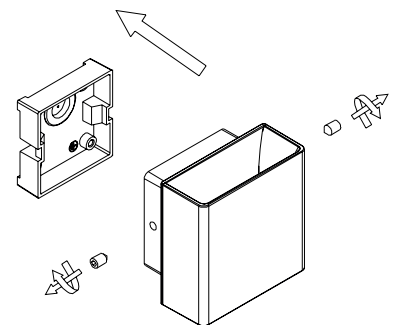


Profile & Dimensions


JC17010

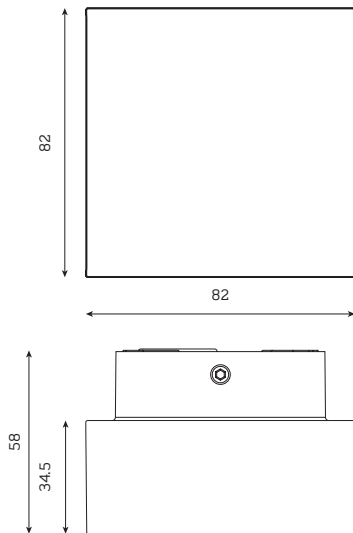


JC17011

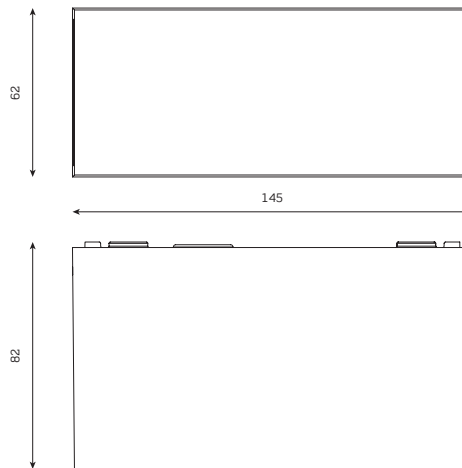


JC17012

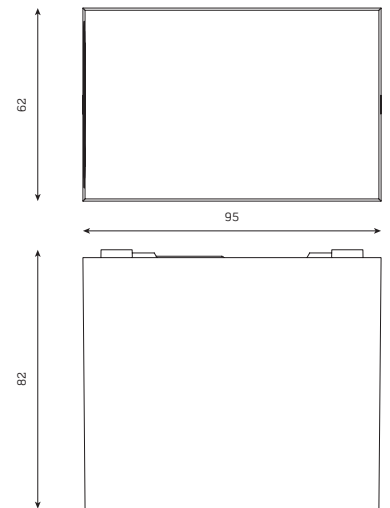


JC17014

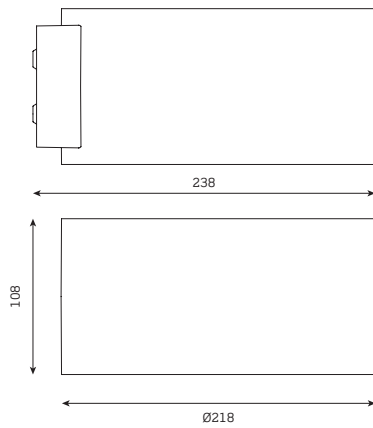


JC17015

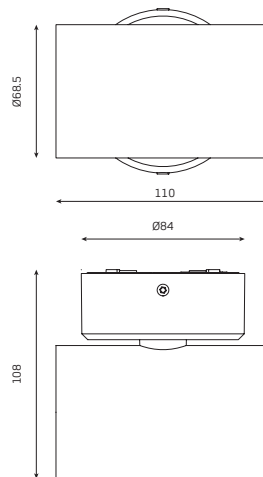


JC17016

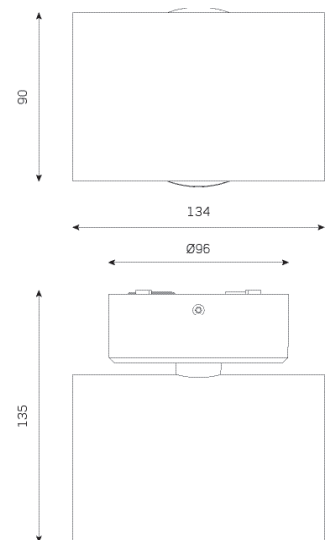

JC17035

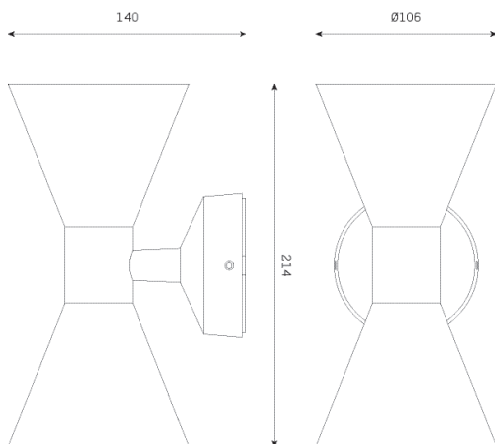

JC17001

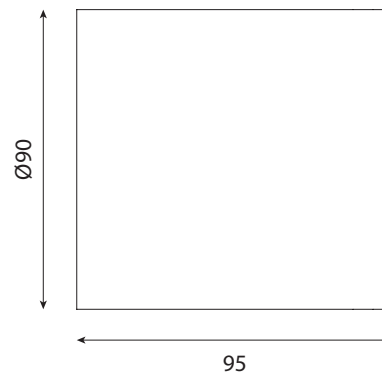

All dimensions in millimetres

Important warranty information

The Architectural exterior range is supported by a 3 year warranty; which must be registered online at jcc.co.uk/warranty.

The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis: Product Code/Batch Code.