

Architectural Exterior Range

Installation guide for exterior Lantern range

JCC | a **LEVITON** company

Important information

- It is recommended that luminaires are installed by a qualified electrician to ensure the installation complies with the local current wiring regulations.
- Any broken or damaged parts should be replaced as soon as possible. JCC will not accept responsibility for claims arising from sub-standard installations.
- These products are designed for connection to a 200-240V~ 50/60Hz supply.
- To maintain the IP rating the correct LED lamp must be installed. Suitable for GLS shaped LED lamps only.
- This luminaire is suitable for indoor and outdoor use.

INSTALLATION

ENGLISH


Specifications

Product code	Wattage	Lumens	LpcW
JC17007	15W ES E27 LED max	n/a	n/a
JC17008	18W	700	39
JC17036	15W ES E27 LED max	n/a	n/a
JC17037	15W ES E27 LED max	n/a	n/a
JC17038	15W ES E27 LED max	n/a	n/a
JC17039	15W ES E27 LED max	n/a	n/a
JC17040	15W ES E27 LED max	n/a	n/a

Colour temp: 3000K Ra: 80

200-240V~ 50/60Hz / Class I

Figure 1. Mains input

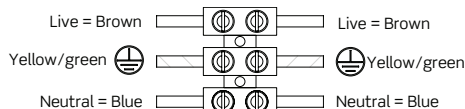


Available finishes: Black or White

- Read instructions and check that you have all of the tools and accessories required to complete the installation correctly. Isolate power supply before starting the installation.


Installation procedure

- Remove body from base/back plate and use as a template for fixing ensuring correct orientation (arrow up). For JC17040 'J' bolts supplied if required to secure in soil using concrete.
- Feed cable through grommet, ensuring water tight prior to fixing in desired location.
- Terminate electrical connections as shown in Fig 1.
- Fit suitable LED lamp as required (max 15W LED).
- Refit body and secure with fixings.
- Turn on supply and test for operation.

N.B. To fit lamp remove top cover using suction cup for glass (bollard only).

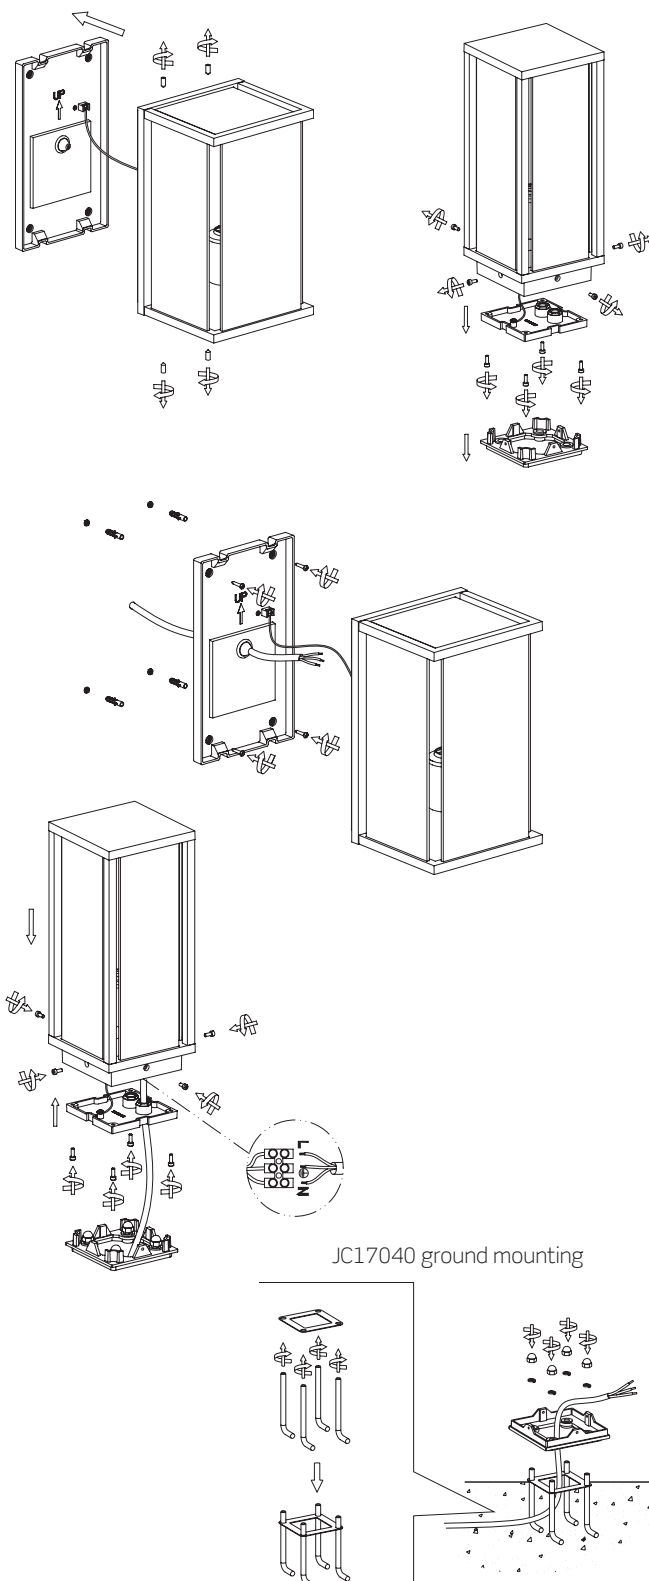

Profile & Dimensions

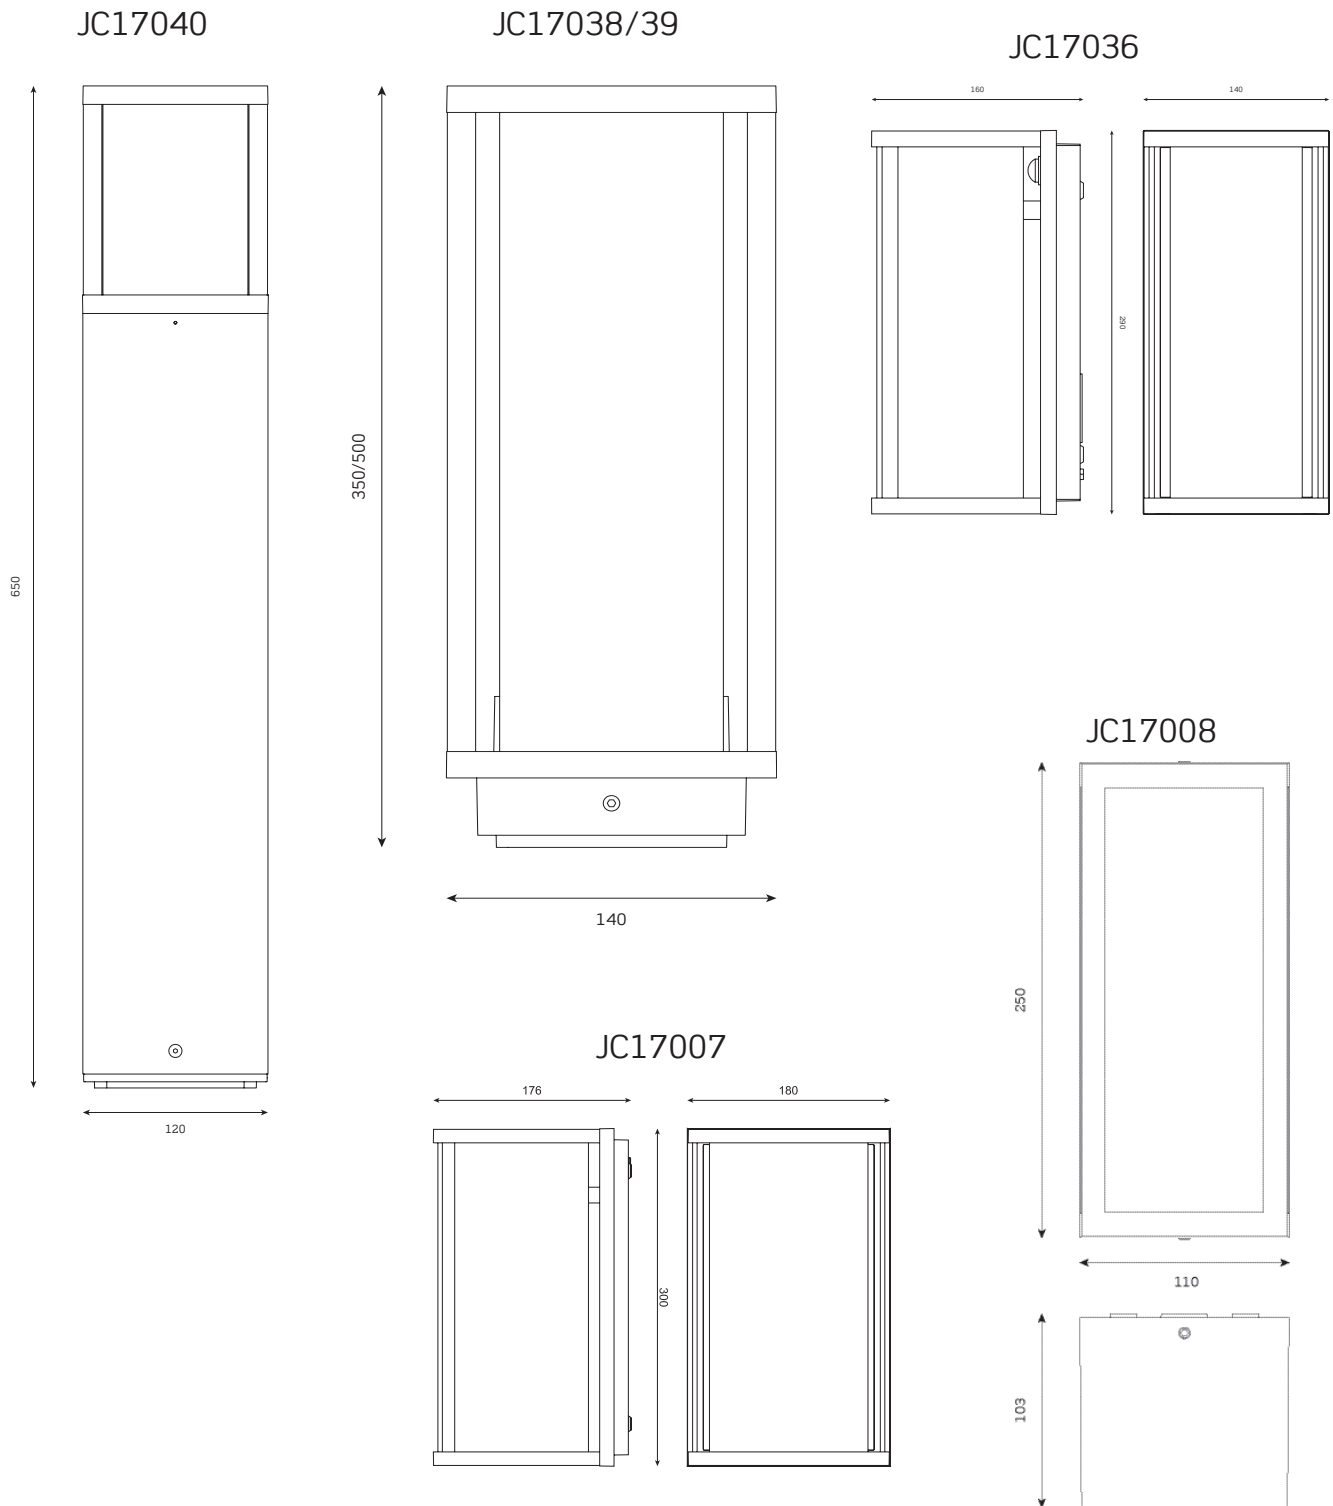

All dimensions in millimetres

Important warranty information

The Architectural exterior range is supported by a 3 year warranty; which must be registered online at jcc.co.uk/warranty.

The installer will be asked to provide the following information, which is detailed on a label attached to the luminaire's chassis: Product Code/Batch Code.