


Data Sheet | Item Number: 857-560

Voltage signal conditioner; Voltage input signal; Current and voltage output signal; Digital output; Configuration via software; Supply voltage: 24 VDC; 6 mm module width

<https://www.wago.com/857-560>

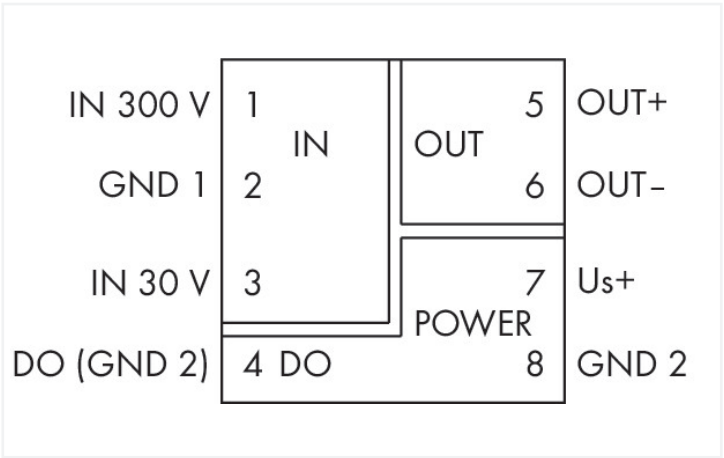

857-560
DIP Switch Adjustability

• = ON Default

DIP Switch S1		Measurement Method		Filter	
1	2	3	4	5	6
300 V	Effective value (RMS)	Arithmetic mean value (bipolar output)	off	active	
150 V					
30 V					
15 V					


DIP Switch S1		Output Signal Range (Bipolar for Arithmetic Mean Value)	
5	6	7	8
4 ... 20 mA			
(+/-) 0 ... 10 V			
2 ... 10 V			
(+/-) 0 ... 10 mA			
2 ... 10 mA			
(+/-) 0 ... 5 V			
1 ... 5 V			

DIP Switch S1		Measurement Range Underflow		Measurement Range Overflow		Digital Output DO/Signaling	
9	10	11	12	13	14	15	16
Lower limit of measurement range -5 %	Upper limit of measurement range +2.5 %	DO V+ switching					
Lower limit of measurement range	Upper limit of measurement range	DO GND switching					
Lower limit of measurement range	Upper limit of measurement range						
Lower limit of measurement range -5 %	Upper limit of measurement range +5 %						

Filter
The filter function allows a low-pass filter to be switched on in order to mask or "smooth out" oscillating measured values (e.g., during trailing edge flows).

Digital Output DO/Signaling
The digital output (DO) signals error messages and can be configured as follows: 24 V → 0 V/0 V → 24 V.

*acc. to NAMUR NE 43

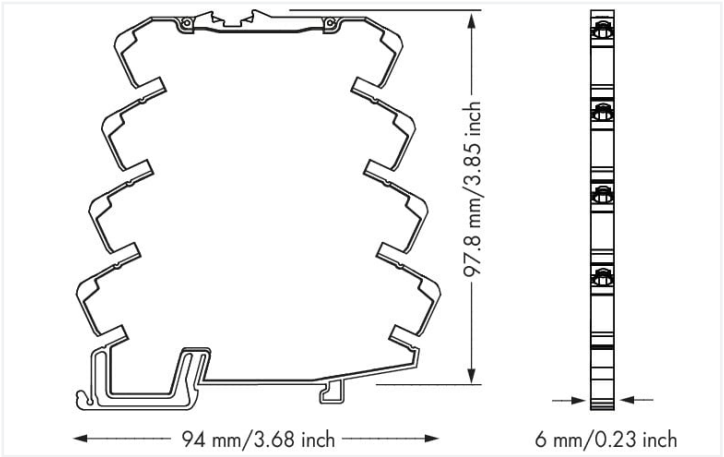

Short description:

WAGO's voltage signal conditioner measures AC/DC voltages up to 300 V, converting the input signal into a standard analog signal at the output.

Features:

- Two isolated measurement inputs for 30 and 300 V AC/DC
- RMS measurement or arithmetic mean value
- A digital signal output reacts to configured measurement range limits (on/off switching delay and threshold value switch function can be configured with up to two threshold values).
- Switchable filter function
- 3-way electrical isolation with 2.5 kV test voltage

Technical data

Configuration	
Configuration options	DIP switch WAGO Interface Configuration Software WAGO Interface Configuration App

Input	
Input signal type	Voltage
Input signal (voltage)	AC/DC 300 V (IN 1); AC/DC 30 V (IN 2)
Measurement frequency	AC 10 ... 100 Hz
Frequency range	10 ... 100 Hz (AC)
Input resistance (voltage input)	≥ 300 kΩ
Response threshold	300 mV (IN 1); 30 mV (IN 2)
Resolution (voltage)	30 mV (IN 1) 3 mV (IN 2)



Output (analog)	
Output signal type	Current Voltage
Output signal (voltage)	0 ... 5 V; 1 ... 5 V; 0 ... 10 V; 2 ... 10 V (can be inverted, also bipolar)
Output signal (current)	0 ... 10 mA; 2 ... 10 mA; 0 ... 20 mA; 4 ... 20 mA (can be inverted, also bipolar)
Load impedance (voltage output)	≥ 1 kΩ
Load impedance (current output)	≤ 600 Ω

Signaling and communication	
Configuration options	WAGO Interface Configuration App WAGO Interface Configuration Software DIP switch
Input signal (voltage)	AC/DC 300 V (IN 1); AC/DC 30 V (IN 2)

Measurement error	
Transmission error (max.)	≤ 0.5 % (of the full scale value)
Temperature coefficient	≤ 0.01 %/K

Safety and protection

Rated voltage	300 V; 150 V (UL)
Measurement category per EN/UL 61010-2-030	CAT II (input)
Note on insulation parameters	The digital output (DO) is at the potential of the supply.
Protection type	IP20

Insulation parameters(UL)	
Overvoltage category	II
Pollution degree	2
Insulation type (input/analog output/supply/service interface)	Reinforced insulation (safe isolation)

Output (digital)	
Switching voltage (DO) max.	Applied supply voltage
Continuous current (DO) max.	100 mA (no internal restriction)
Number of switching thresholds (DO)	1 or 2 (adjustable)
Configurable rise/fall delay time (DO)	0 ... 60 s (via software)

Signal processing	
Measurement method	RMS measurement; Arithmetic mean value
Limit frequency	2 kHz
Software filter (adjustable)	Moving average value (filter level: 30)
Step response (typ.)	30 ms

Supply	
Power supply type	24 VDC
Nominal supply voltage U _S	DC 24 V
Supply voltage range	±30 %
Current consumption at nominal supply voltage	≤ 46 mA (+ I _{DO})

Test voltage	
Test voltage (input/analog output/supply/service interface)	2.5 kVAC; 50 ... 60 Hz; 1 min

Insulation parameters	
Overvoltage category	II
Pollution degree	2
Insulation type (input/analog output/supply/service interface)	Double insulation (impedance and basic insulation) Requirement: The GND 1 input is dangerous when active and the measurement is conducted as a low-side measurement!

Connection data

Connection technology	Push-in CAGE CLAMP®
Solid conductor	0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.34 ... 2.5 mm² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inches



Physical data	
Width	6 mm / 0.236 inches
Height	94 mm / 3.701 inches
Depth from upper-edge of DIN-rail	97.8 mm / 3.85 inches

Mechanical data	
Mounting type	DIN-35 rail

Material data	
Fire load	0.013 MJ
Weight	40 g

Environmental requirements	
Ambient temperature (operation)	-40 ... +70 °C (at nominal current)
Ambient temperature (storage)	-40 ... +85 °C
Temperature range of connection cable	≥ (T _{ambient} + 10 K)
Temperature range of connection cable (UL)	80 °C
Relative humidity	5 ... 95 % (no condensation permissible)
Operating altitude (max.)	2000 m

Standards and specifications	
Conformity marking	CE
EMC immunity to interference	EN 61000-6-2; EN 61326-2-3; EN 50121-3-2
EMC emission of interference	EN 61000-6-3; EN 61326-2-3; EN 50121-3-2
Standards/specifications	EN 61010-1 EN 61373 EN 50121-3-2

Commercial data	
eCl@ss 10.0	27-21-01-25
eCl@ss 9.0	27-21-01-25
ETIM 8.0	EC002477
ETIM 7.0	EC002477
PU (SPU)	1 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4055143481571
Customs tariff number	85437090300

Approvals / Certificates

General approvals	General approvals
-------------------	-------------------



UL
Underwriters Laboratories
Inc. (ORDINARY LOCATIONS)
UL 61010-2-201
E175199

Approval	Standard	Certificate Name
EAC Brjansker Zertifizierungs- stelle	TP TC 020/2011	EAC_Certificate_RU_C- DE.AM02.B.00115_19
EAC Brjansker Zertifizierungs- stelle	TP TC 004/2011	EAC RU C-DE.AM02. B.00122/19



Downloads				
Environmental Product Compliance				
Compliance Search				
Environmental Product Compliance 857-560				↓

Documentation				
Bid Text			Instruction Leaflet	
857-560	17.07.2019	xml 7.35 KB	↓	Signal conditioner; voltage; configurable; with digital output
857-560	17.07.2019	docx 19.16 KB	↓	V 2.0.0 29.09.2020
857-560	17.07.2019	pdf 77.36 KB	↓	pdf 2397.31 KB

CAD/CAE-Data				
CAD data			CAE data	
2D/3D Models 857-560				↓
				EPLAN Data Portal 857-560
				↓
				WSCAD Universe 857-560
				↓
				ZUKEN Portal 857-560
				↓

Engineering-Software				
Software for Interface-Products				
WAGO Interface Configuration Software G2 FULL	1.0.8.6 20.01.2022	exe 111289.67 KB	↓	
WAGO Interface Configuration Software G2 SMALL	1.0.8.6 20.01.2022	exe 29307.84 KB	↓	

1 Compatible Products
1.1 Optional Accessories
1.1.1 Cables and connectors

1.1.1.1 Communication cable



[Item No.: 750-923/000-001](#)
Configuration cable; USB connector;
Length: 5 m

1.1.2 Communication

1.1.2.1 Bluetooth



[Item No.: 750-921](#)
Bluetooth® Adapter

1.1.2.2 Communication cable



[Item No.: 750-923](#)
Configuration cable; USB connector;
Length: 2.5 m

1.1.3 Interface module

1.1.3.1 Interface adapters



[Item No.: 857-980](#)
Interface adapter; 16-pole; analog

1.1.4 Jumper

1.1.4.1 Jumper



[Item No.: 281-482](#)
Jumper; 2-way; insulated; gray



[Item No.: 859-410/000-006](#)
Jumper; for jumper slot; 10-way; insulated; blue



[Item No.: 859-410](#)
Jumper; for jumper slot; 10-way; insulated; light gray



[Item No.: 859-410/000-005](#)
Jumper; for jumper slot; 10-way; insulated; red



[Item No.: 859-410/000-029](#)
Jumper; for jumper slot; 10-way; insulated; yellow



[Item No.: 859-402/000-006](#)
Jumper; for jumper slot; 2-way; insulated; blue



[Item No.: 859-402](#)
Jumper; for jumper slot; 2-way; insulated; light gray



[Item No.: 859-402/000-005](#)
Jumper; for jumper slot; 2-way; insulated; red



[Item No.: 859-402/000-029](#)
Jumper; for jumper slot; 2-way; insulated; yellow



[Item No.: 859-403/000-006](#)
Jumper; for jumper slot; 3-way; insulated; blue



[Item No.: 859-403](#)
Jumper; for jumper slot; 3-way; insulated; light gray



[Item No.: 859-403/000-005](#)
Jumper; for jumper slot; 3-way; insulated; red



[Item No.: 859-403/000-029](#)
Jumper; for jumper slot; 3-way; insulated; yellow



[Item No.: 859-404/000-006](#)
Jumper; for jumper slot; 4-way; insulated; blue



[Item No.: 859-404](#)
Jumper; for jumper slot; 4-way; insulated; light gray



[Item No.: 859-404/000-005](#)
Jumper; for jumper slot; 4-way; insulated; red



[Item No.: 859-404/000-029](#)
Jumper; for jumper slot; 4-way; insulated; yellow



[Item No.: 859-405/000-006](#)
Jumper; for jumper slot; 5-way; insulated; blue



[Item No.: 859-405](#)
Jumper; for jumper slot; 5-way; insulated; light gray



[Item No.: 859-405/000-005](#)
Jumper; for jumper slot; 5-way; insulated; red



1.1.4.1 Jumper



Item No.: 859-405/000-029
Jumper; for jumper slot; 5-way; insulated; yellow



Item No.: 859-406/000-006
Jumper; for jumper slot; 6-way; insulated; blue



Item No.: 859-406
Jumper; for jumper slot; 6-way; insulated; light gray



Item No.: 859-406/000-005
Jumper; for jumper slot; 6-way; insulated; red



Item No.: 859-406/000-029
Jumper; for jumper slot; 6-way; insulated; signal yellow



Item No.: 859-407/000-006
Jumper; for jumper slot; 7-way; insulated; blue



Item No.: 859-407
Jumper; for jumper slot; 7-way; insulated; light gray



Item No.: 859-407/000-005
Jumper; for jumper slot; 7-way; insulated; red



Item No.: 859-407/000-029
Jumper; for jumper slot; 7-way; insulated; yellow



Item No.: 859-408/000-006
Jumper; for jumper slot; 8-way; insulated; blue



Item No.: 859-408
Jumper; for jumper slot; 8-way; insulated; light gray



Item No.: 859-408/000-005
Jumper; for jumper slot; 8-way; insulated; red



Item No.: 859-408/000-029
Jumper; for jumper slot; 8-way; insulated; yellow



Item No.: 859-409/000-006
Jumper; for jumper slot; 9-way; insulated; blue



Item No.: 859-409
Jumper; for jumper slot; 9-way; insulated; light gray



Item No.: 859-409/000-005
Jumper; for jumper slot; 9-way; insulated; red



Item No.: 859-409/000-029
Jumper; for jumper slot; 9-way; insulated; yellow

1.1.5 Marking

1.1.5.1 Marker



Item No.: 793-5501
WMB marking card; as card; for terminal block width 5 - 17.5 mm; stretchable 5 - 5.2 mm; plain; snap-on type; white



Item No.: 793-502
WMB marking card; as card; MARKED; 1 ... 10 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-566
WMB marking card; as card; MARKED; 1 ... 50 (2x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-503
WMB marking card; as card; MARKED; 11 ... 20 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-504
WMB marking card; as card; MARKED; 21 ... 30 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-505
WMB marking card; as card; MARKED; 31 ... 40 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-506
WMB marking card; as card; MARKED; 41 ... 50 (10x); not stretchable; Horizontal marking; snap-on type; white



Item No.: 793-501
WMB marking card; as card; not stretchable; plain; snap-on type; white



Item No.: 2009-115
WMB-Inline; for Smart Printer; 1500 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white

1.1.5.2 Marking strip



Item No.: 2009-110
Marking strips; for Smart Printer; on reel; not stretchable; plain; snap-on type; white

1.1.6 Power supply



1.1.6.1 Power supply unit



Item No.: 787-2852
Switched-mode power supply; 1-phase;
24 VDC output voltage; 1 A output current

1.1.7 Power tap

1.1.7.1 Power tap



Item No.: 855-8015
Power tap; for busbar; with fuse; Clamping connection



Item No.: 855-8006
Power tap; for busbar; with fuse; Mounting screw M6



Item No.: 855-8008
Power tap; for busbar; with fuse; Mounting screw M8



Item No.: 855-8003
Power tap; with fuse; 10 mm² (8 AWG) - 16 mm² (6 AWG); Phase



Item No.: 855-8001
Power tap; with fuse; 2,5 mm² (12 AWG) - 6 mm² (10 AWG); Phase



Item No.: 855-8004
Power tap; without fuse; 10 mm² (8 AWG) - 16 mm² (6 AWG); N-conductor



Item No.: 855-8002
Power tap; without fuse; 2,5 mm² (12 AWG) - 6 mm² (10 AWG); N-conductor

1.1.8 Relay module

1.1.8.1 Relay module



Item No.: 857-304
Relay module; Nominal input voltage: 24 VDC; 1 changeover contact; Limiting continuous current: 6 A; Yellow status indicator; Module width: 6 mm; 2,50 mm²; gray

1.1.9 Screwless end stop

1.1.9.1 Mounting accessories



Item No.: 249-117
Screwless end stop; 10 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-197
Screwless end stop; 14 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray



Item No.: 249-116
Screwless end stop; 6 mm wide; for DIN-rail 35 x 15 and 35 x 7.5; gray

1.1.10 Terminal blocks

1.1.10.1 Supply module



Item No.: 857-979
Supply and through module

1.1.10.2 Through terminal block



Item No.: 857-979
Supply and through module

1.1.11 Tool


1.1.11.1 Operating tool




Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Configuring



Configuration via DIP switch




Configuration via WAGO Interface Configuration Software



Configuration via WAGO Interface Configuration App

Commoning



Commoning, not discrete wiring – Same outline allows use of a single in-line, push-in jumper.