



Heating Plug 230 VAC / 12 A CHAP-01/xx-12E

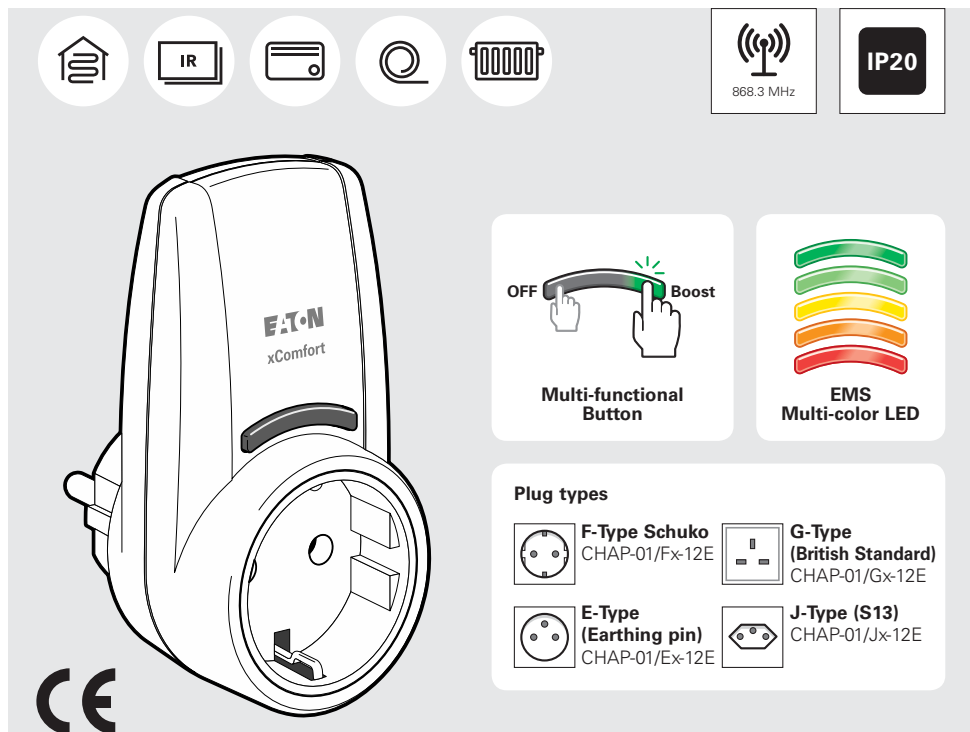

Technical Data / Technische gegevens / Tekniske data / Technische Daten / Technická data


Power supply	230 VAC +10% -15%, 50 Hz
Power standby	190mW (TYP)
Load	RLC, 12A (at 40°C, Derating*)
Technology	Eaton Patented Hybrid Zero-cross
Switching lifetime	5×10 ⁷ (TYP)
Inrush current	500A@200us, 300A@1ms, 200A@3ms (TYP)
EMS	3W to 2760W, 5% (>3W)
RF	868,3MHz (xComfort compatible)
Button Operation	On / Off / Boost
Button LED	Multi-Color EMS power consumption
Profiles	5 PWM Heating Profiles
Dimensions	100.3 x 52 x 56.9 mm (H x W x D)

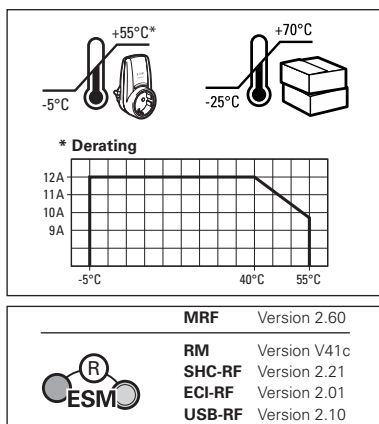

Heating Plug


230VAC / 12A

Operation

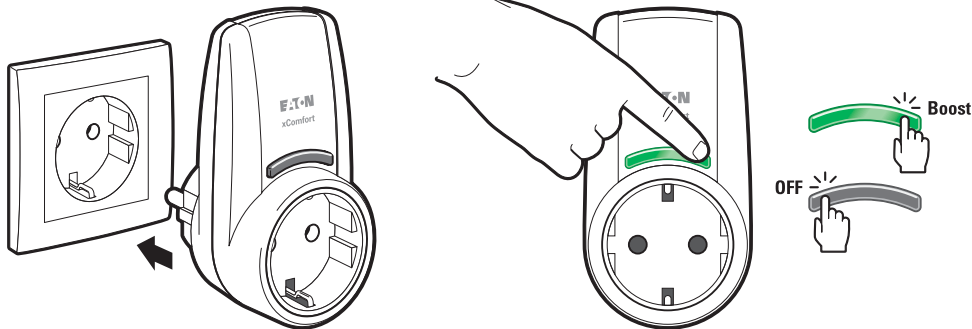


Programming

Set Heating Profile / Verwarmingsprofiel instellen / Stille inn varmeprofil / Einstellen des Heizprofil / Nastavení topného profilu

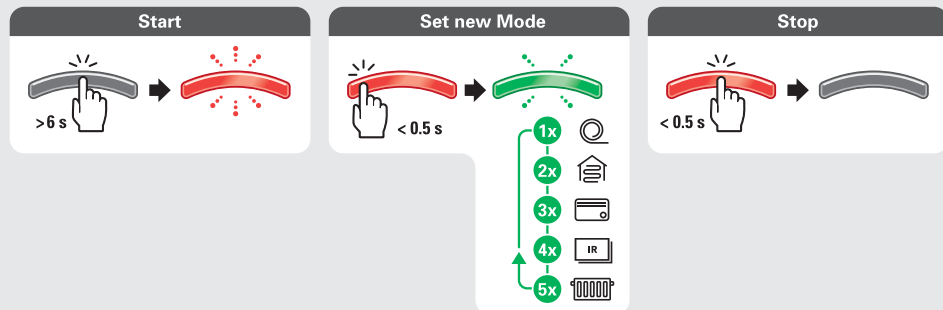

Button behaviour / Knopgedrag / Tastenfunktion / Knapp virkemåte / Funkce tlačítka

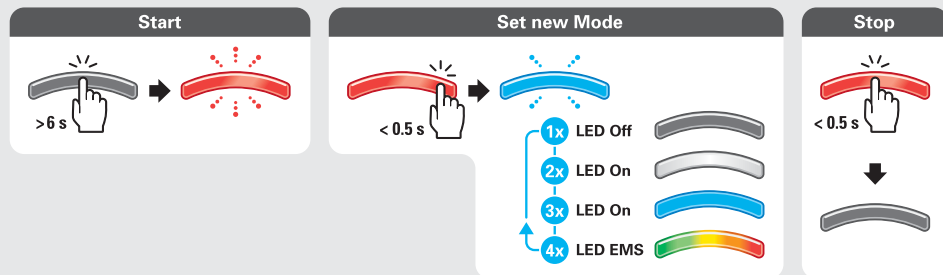

Notification / Notificatie / Benachrichtigung / Melding / Zpráva



Button indication

LED Off Mode (Off)	LED On Mode (white)	LED On Mode (blue)	LED EMS Mode (multi-color)
 Off  On	 Off  On	 Off  On	% Power 2760W  Off  < 20%  21 - 40%  41 - 60%  61 - 80%  > 81%


Actuator Off	Load error	Overload	Emergency
			

Assign Sensor in Basic Mode / Sensor in Basic Mode toewijzen / Tilknytte i Basic Mode / Zuweisen im Basic Mode / Přiradit v základním režimu

Start

> 6 s


Assign
flashing / blinker / knippert
blinkt / blikání

> 7 s

1x ^

[ON]

2x

Stop


< 0.5 s


Remove Sensor in Basic Mode / Sensor in Basic Mode verwijderen / Fjerne i Basic Mode / Im Basic Mode löschen / Odstranit v základním režimu

Start

> 6 s


Remove
flashing / blinker / knippert
blinkt / blikání

> 7 s

1x ^

DEL

5x

Stop

< 0.5 s


Back to factory default / Terug naar fabrieksinstellingen / Tilbake til fabrikkinnstillinger / Zurück zu den werkseitigen Standard / Zpět na tovární hodnoty

Start

> 6 s


Reset

> 5 s

5x




Declaration of Conformity

We, EATON Industries (Austria) GmbH
3943 Schrems, Eugenia 1
Austria

declare under our sole responsibility as the manufacturer that the product (family)

Eaton - Plug in adapter - heating, CHAP-01/xx-12E

(the declaration of conformity applies to all
listed types within our actual product catalogue)

provided that it is installed, maintained and used in the
application intended for, with respect to the relevant manufacturers
instructions, installation standards and "good engineering practices"

complies with the provisions of Council directive(s):

RED Directive 2014/53/EU

RoHS Directive 2011/65/EU

based on compliance with following standard(s):

EN 300 220-2 V3.1.1, EN 300 489-1 V1.9.2, EN 301 489-1 V2.1.0, EN
301 489-3 V1.6.1, EN 301 489-3 V2.1.1, EN 50491-5-1:2010, EN 50491-
5-2:2010, EN 60669-2-5:2017, EN 50581:2012

EU- type examination performed by:
TÜV Austria Services GmbH, Notified Body
1230 Vienna, Deutschstrasse 10, Austria

Affixing date of CE mark: 2018
Doc.id.: CHAP-01xx-12E_270718


Fernando Ceccarelli

Senior Vice President
General Manager

27.07.2018


Friedrich Schröder

Director Quality
& Systems

