## **SIEMENS**

Data sheet 3RU2126-4FB0



Overload relay 34...40 A Thermal For motor protection Size S0, Class 10 Contactor mounting Main circuit: Screw Auxiliary circuit: Screw Manual-Automatic-Reset

product brand name	SIRIUS
product designation	thermal overload relay
product type designation	3RU2
General technical data	
size of overload relay	S0
size of contactor can be combined company-specific	S0
power loss [W] for rated value of the current at AC in hot operating state	9.6 W
• per pole	3.2 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
maximum permissible voltage for protective separation in networks with grounded star point	
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between auxiliary and auxiliary circuit</li> </ul>	440 V
<ul> <li>between main and auxiliary circuit</li> </ul>	440 V
between main and auxiliary circuit	440 V
shock resistance according to IEC 60068-2-27	8g / 11 ms
type of protection according to ATEX directive 2014/34/EU	Ex II (2) GD
certificate of suitability according to ATEX directive 2014/34/EU	DMT 98 ATEX G 001
reference code according to IEC 81346-2	F
Substance Prohibitance (Date)	10/01/2009
SVHC substance name	Blei - 7439-92-1
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
during operation	-40 +70 °C
during storage	-55 +80 °C
during transport	-55 +80 °C
temperature compensation	-40 +60 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	34 40 A
operating voltage	
• rated value	690 V
at AC-3e rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current rated value	40 A
operational current at AC-3e at 400 V rated value	40 A

operating power	
• at AC-3	
— at 400 V rated value	18.5 kW
— at 500 V rated value	22 kW
— at 690 V rated value	37 kW
• at AC-3e	
— at 400 V rated value	18.5 kW
— at 500 V rated value	22 kW
— at 690 V rated value	37 kW
Auxiliary circuit	
design of the auxiliary switch	integrated
number of NC contacts for auxiliary contacts	1
• note	for contactor disconnection
number of NO contacts for auxiliary contacts	1
• note	for message "Tripped"
number of CO contacts for auxiliary contacts	0
operational current of auxiliary contacts at AC-15	
• at 24 V	3 A
• at 110 V	3 A
• at 120 V	3 A
• at 125 V	3 A
• at 230 V	2 A
• at 400 V	1 A
• at 690 V	0.75 A
operational current of auxiliary contacts at DC-13	5.16 N
• at 24 V	2 A
• at 60 V	0.3 A
• at 110 V	0.22 A
• at 125 V	0.22 A
• at 220 V	0.11 A
contact rating of auxiliary contacts according to UL	B600 / R300
Protective and monitoring functions	2000 / 1000
trip class	CLASS 10
	CLASS TO
·	thermal
design of the overload release	thermal
design of the overload release UL/CSA ratings	thermal
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor	
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value	40 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value	
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection	40 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link	40 A 40 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required	40 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions	40 A 40 A fuse gG: 6 A, quick: 10 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required Installation/ mounting/ dimensions  mounting position	40 A 40 A fuse gG: 6 A, quick: 10 A
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method	40 A 40 A fuse gG: 6 A, quick: 10 A any Contactor mounting
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height	40 A 40 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth	40 A 40 A fuse gG: 6 A, quick: 10 A any Contactor mounting 85 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm 85 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm 85 mm
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm 85 mm No
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm 85 mm  No  screw-type terminals screw-type terminals
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm 85 mm No
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm 85 mm  No  screw-type terminals screw-type terminals
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm 85 mm  No  screw-type terminals screw-type terminals
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value  • at 600 V rated value  Short-circuit protection  design of the fuse link  • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection  • for main current circuit  • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm 85 mm  No  screw-type terminals screw-type terminals
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections • for main contacts	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm 85 mm  No  screw-type terminals screw-type terminals Top and bottom
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections • for main contacts — solid or stranded	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm 85 mm No  screw-type terminals screw-type terminals Top and bottom  2x (1 2.5 mm²), 2x (2.5 10 mm²)
design of the overload release  UL/CSA ratings  full-load current (FLA) for 3-phase AC motor  • at 480 V rated value • at 600 V rated value  Short-circuit protection  design of the fuse link • for short-circuit protection of the auxiliary switch required  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  Connections/ Terminals  product component removable terminal for auxiliary and control circuit  type of electrical connection • for main current circuit • for auxiliary and control circuit  arrangement of electrical connectors for main current circuit  type of connectable conductor cross-sections • for main contacts  — solid or stranded — finely stranded with core end processing	40 A 40 A fuse gG: 6 A, quick: 10 A  any Contactor mounting 85 mm 45 mm 85 mm  No  screw-type terminals screw-type terminals Top and bottom  2x (1 2.5 mm²), 2x (2.5 10 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm²

<ul> <li>for auxiliary contacts</li> </ul>	
<ul> <li>solid or stranded</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
<ul> <li>for AWG cables for auxiliary contacts</li> </ul>	2x (20 16), 2x (18 14)
tightening torque	
<ul> <li>for main contacts with screw-type terminals</li> </ul>	2 2.5 N·m
<ul> <li>for auxiliary contacts with screw-type terminals</li> </ul>	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 6 mm
size of the screwdriver tip	Pozidriv PZ 2
design of the thread of the connection screw	
• for main contacts	M4
<ul> <li>of the auxiliary and control contacts</li> </ul>	M3
Safety related data	
failure rate [FIT] with low demand rate according to SN 31920	50 FIT
MTTF with high demand rate	2 280 a
T1 value for proof test interval or service life according to IEC 61508	20 a
protection class IP on the front according to IEC 60529	IP20
touch protection on the front according to IEC 60529	finger-safe, for vertical contact from the front
Display	
display version for switching status	Slide switch
Certificates/ approvals	

**General Product Approval** 

For use in hazardous locations

Confirmation











**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping





Type Test Certificates/Test Report

**Special Test Certific-**<u>ate</u>





Marine / Shipping











Household and similar appliances

other

other

Confirmation Vibration and Shock

Railway

Siemens has decided to exit the Russian market (see here).

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RU2126-4FB0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RU2126-4FB0


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RU212


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) <a href="http://www.automation.siemens.com/bilddb/cax">http://www.automation.siemens.com/bilddb/cax</a> de.aspx?mlfb=3RU2126-4FB0&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current https://support.industry.siemens.com/cs/ww/en/ps/3RU2126-4FB0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RU2126-4FB0&objecttype=14&gridview=view1

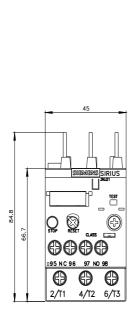

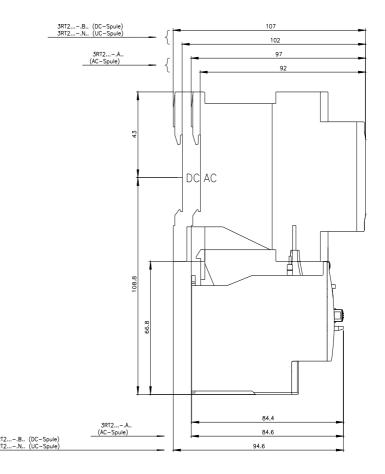

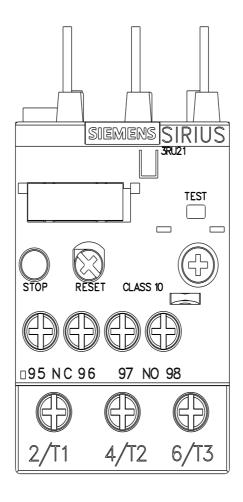

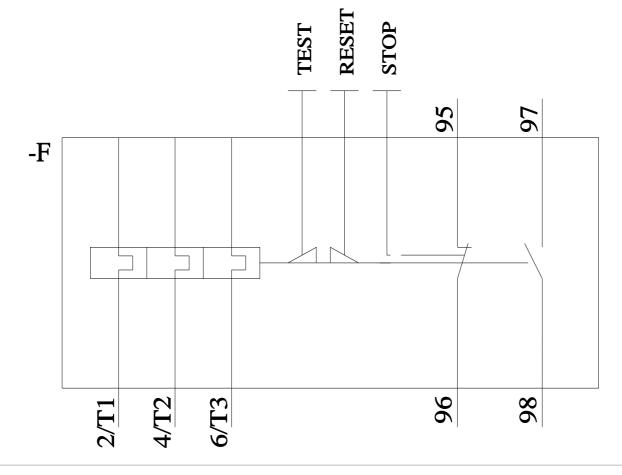

last modified: 9/5/2023 🖸