



Read these instructions before commencing installation. Please give these instructions to the owner/occupier after installation to retain for future reference/maintenance.

Important Information

It is recommended that these luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations & local building control. Any faulty, broken or damaged parts should be replaced immediately. KSR will not accept responsibility for any claims arising from a poor installation. Please Note: The limited warranty shall be deemed null and void in the following circumstances: Failure by the installer, end user or any third party to exercise caution to protect any covered product or part from outside damage, physical abuse as well as failure related to workmanship in the installation of the products or parts.

Installation Procedure

Place the rods into the 3 holes around the edge of the base plate and secure with 3 hex nuts. Fix top plate using the last 3 hex nut as per Fig. 1. Ensuring that the power is turned off. Dig a suitable hole minimum 600mm deep and 250mm round to take the root kit, place the root kit over the supply cable and back fill with gravel until the root kit top plate is at the required level. Ensuring the top plate stays level back fill with gravel. No soil should be in contact with the root kit as depending on acidity of the soil this can reduce the life/warranty of the root kit. Terminate the bollard to the mains supply cable as per the bollard instructions and then fit the bollard to the root kit using the 3 washers and domed hex nuts supplied in the root mounting kit ensuring that you grease the exposed thread before fitting the nuts as per fig. 2.

Fig. 1


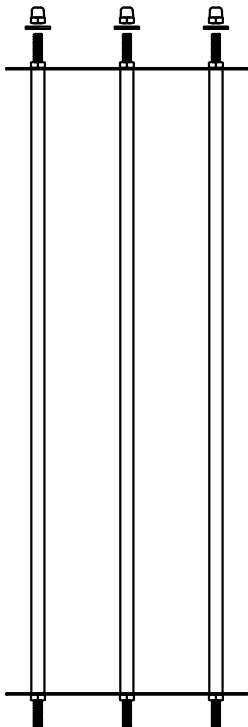


Fig. 2


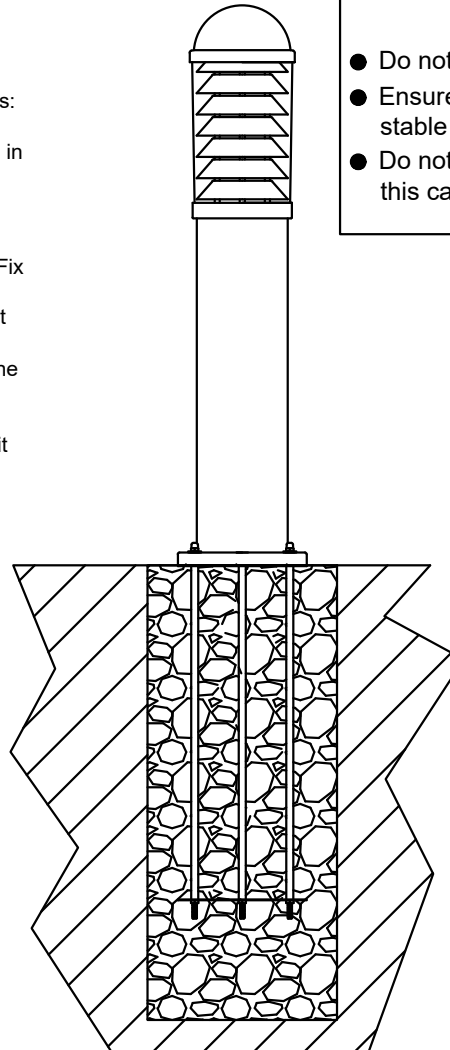


Important Notes

- Do not cover or bury the base.
- Ensure product is fitted to an even and stable surface.
- Do not force or overtighten the anchor bolts this can put a strain on the other fixings.

Details

304 Grade Stainless Steel
495mm High
180mm Diameter
135mm Fixing Centres
30mm Cable Entry

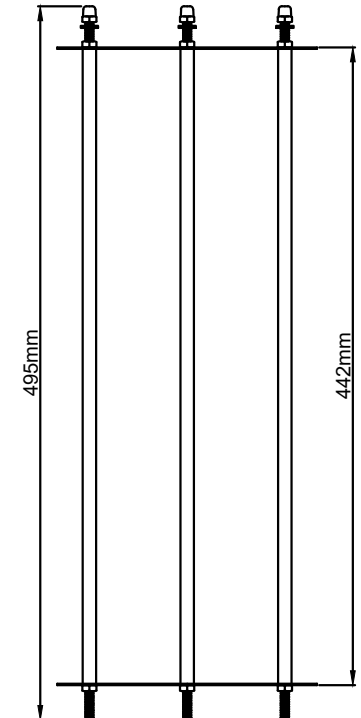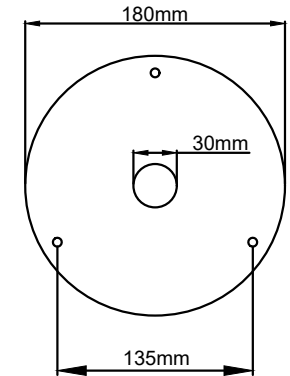

KSR9914



KSR Lighting Aftersales: 023 92 674343
E-mail: aftersales@ksrlighting.com