



LED MULTI FIXING EXIT SIGN



Versatile fitting offering 4 different fixing options for maximum flexibility and long term performance

- Polycarbonate construction • LED charge light and battery test button
- Comes complete with 4 fixing options - ceiling mounted, end mounted, wall mounted and suspended (adjustable length 1m suspension cable included)
- Supplied with a double-sided up arrow ISO 7010 format exit legend - full range of alternative legend directional panels available separately including signs directive format
- 3 hour maintained mode as standard which can also be configured for non-maintained or remote switched operation
- 35 lm (mains) / 25 lm (battery)
- Additional recessed option available with EXITREC
- Battery - Ni-Cd 3.6V 800mAh
- Battery 1 year warranty - Replacement battery code: EB8

EXITREC: Hole cut out size: 360mm x 65mm

Code	Version	Wattage	Colour Temp.	Viewing Distance	IP Rating	MOM / OPQ
EXITMMO	Fitting	2.8W	6000K	30m	IP20	1 / 6
Accessories						
EXITREC	White Recessed Mounting Kit					1 / 25
ISOMMOLR	ISO 7010 Left/Right Arrow Legend					1 / 100
ISOMMOD	ISO 7010 Down Arrow Legend					
EMMOUP	Signs Directive Up Arrow Legend					
EMMOD	Signs Directive Down Arrow Legend					
EMMOLR	Signs Directive Left/Right Arrow Legend					

EXITMMO comes complete with ISO 7010 up arrow legend

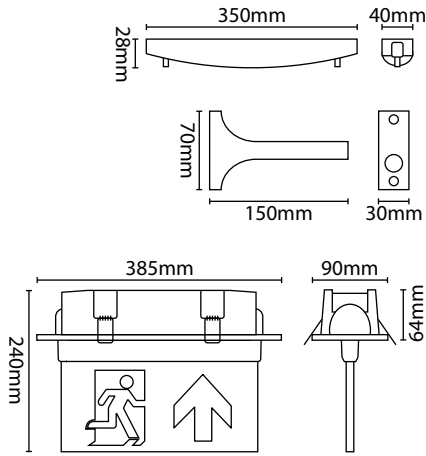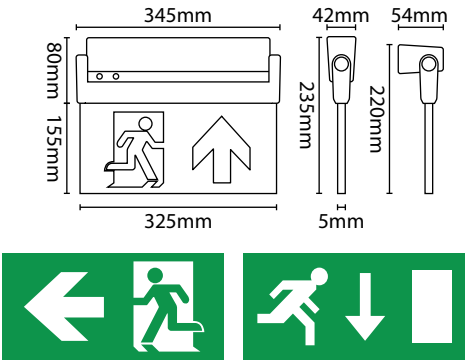

Recessed mounting kit available separately EXITREC

Quick Guide Mounting Instructions


SUSPENSION KIT (INCLUDED)



- 1) Suspension kit is in 2 parts - cable and ceiling mount



- 2) Screw the base of the barrel to the top cover of the fitting

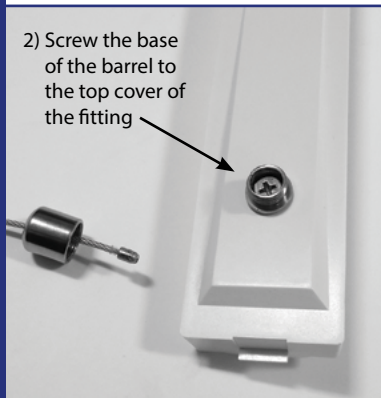

- 3) Secure barrel in place with the nut supplied



- 4) Attach the top of the barrel to base of the barrel



- 5) Feed the suspension cable through the ceiling mount



- 6) Adjust the cable length by pushing the release button


- 7) Attach the ceiling mount to desired area




NOTE: ceiling mount fixings not supplied

WALL MOUNT (INCLUDED)


- 1) Ensure wall mount is this way up when attaching to a wall

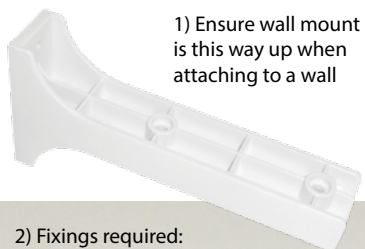

- 2) Fixings required:

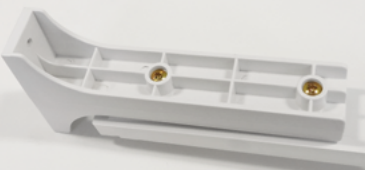

- 3) Feed the screws through the wall mount & the top cover of the fitting. Secure these with nuts supplied



- 4) Re attach the top cover of the fitting and secure with the screw that was removed earlier

RECESSED MOUNTING KIT (EXITREC)





- Recessed mounting kit (EXITREC)




- 1) Cut a 360mm x 65mm fixing hole ensuring the hole is cut accurately



- 2) Fit EXITREC into the fixing hole using its retaining clips



NOTE: the charge and test buttons are still visible with the EXITREC on



DIRECT MOUNTING

The top of the fitting rotates 45° so it can be mounted directly to a ceiling or wall.

