


DECORATIVE WIRING ACCESSORIES

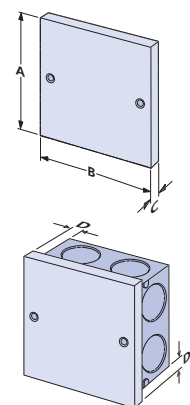

DIMENSION & CLOSE COUPLING DETAILS

Description		A	B	C	D
Flatplate 1 Gang		87.2mm	87.2mm	2mm	7.45mm
Flatplate 2 Gang		87.2mm	147.2mm	2mm	7.3mm
Round Edge 1 Gang		86.5mm	86.5mm	8.2mm	7.1mm
Round Edge 2 Gang		86.5mm	147mm	8.2mm	7.2mm
Curved Edge 1 Gang		84.4mm	84.4mm	8mm	6.05mm
Curved Edge 2 Gang		84.4mm	145.6mm	8mm	6.5mm
Angled Edge 1 Gang		89.7mm	89.7mm	8.2mm	8.7mm
Angled Edge 2 Gang		89.7mm	150mm	8.2mm	8.7mm
Decorative Brass 1 Gang		95.7mm	95.7mm	10.4mm	11.7mm
Decorative Brass 2 Gang		95.7mm	155mm	10.4mm	11.2mm

RECOMMENDED MOUNTING BOXES FOR DECORATIVE WIRING ACCESSORIES

Description	Raised Plate List no	Flat Plate List no	Gang Box	Minimum box Size	Metal Flush box List no	Dry Lining box List no
10AX 1 gang 2 way Switch	VX1020__	*VX3020__	1	16mm	SB623	SB619
10AX 2 gang 2 way Switch	VX1040__	*VX3040__	1	16mm	SB623	SB619
10AX 1 gang Intermediate Switch	VX1010__	*VX3030__	1	16mm	SB623	SB619
10AX 3 gang 2 way Switch	VX1050__	-	1	16mm	SB623	SB619
10AX 4 gang 2 way Switch	VX1054__	*VX3054__	2	16mm	SB633	SB629
Fan Isolator	VX1013__	*VX3013__	1	25mm	SB655	SB619
1 gang 2 way Toggle Switch	VX1120__	*VX3120__	1	25mm	SB655	SB619
1 gang Intermediate Toggle Switch	VX1130__	*VX3130__	1	25mm	SB655	SB619
2 gang 2 way Toggle Switch	VX1140__	*VX3140__	1	25mm	SB655	SB619
3 gang 2 way Toggle Switch	VX1150__	*VX3150__	1	25mm	SB655	SB619
1 gang 2 way 400W Low Voltage/Mains Dimmer	VX0400LV__PU	*VX3400LV__PU	1	35mm	SB615	SB619
2 gang 2 way 250W Low voltage/mains Dimmer	VX0252LV__PU	*VX3252LV__PU	1	25mm	SB655	SB619
3 gang 2 way 250W Low voltage/mains Dimmer	VX0253LV__PU	*VX3253LV__PU	2	25mm	SB665	SB629
1 gang 2 way 400W Mains Dimmer	VX0400__PU	*VX3400__PU	1	35mm	SB615	SB619
2 gang 2 way 250W Mains Dimmer	VX0252__PU	*VX3252__PU	1	25mm	SB655	SB619
3 gang 2 way 250W Mains Dimmer	VX0253__PU	*VX3253__PU	2	25mm	SB655	SB629
4 gang 2 way 250W Mains Dimmer	VX0254__PU	*VX3254__PU	2	25mm	SB655	SB629
1 way 500W/500VA Touch Dimmer	VX0500TD__	*VX3005TD__	1	35mm	SB615	SB619
1 way 400W Touch Remote Dimmer	VX0400TRD__	*VX3400TRD__	1	35mm	SB615	SB619
5A 3 pin socket	VX9905__	*VX3905__	1	25mm	SB655	SB619
13A 1 gang DP Switched Socket	VX1300__ /D	*VX3300__ /D	1	25mm	SB665	SB629
13A 2 gang DP Switched Socket	VX1500__ /D	*VX3500__ /D	2	25mm	SB665	SB629
13A Unswitched Fused Connection Unit	VX1090__	*VX3090__	1	25mm	SB655	SB619
13A DP Switched Fused Connection Unit	VX1080__	*VX3080__	1	25mm	SB655	SB619
13A DP Switched Fused Connection Unit with Neon	VX1081__	*VX3081__	1	25mm	SB655	SB619
20A 1 gang DP Switch with Neon	VX1060__	*VX3060__	1	25mm	SB655	SB619
1 gang 45A Switch	VX9713__	*VX3713__	1	47mm	SB618	SB632
2 gang 45A Switch	VX9703__	-	2	47mm	SB628	SB631
Cooker control unit with Neon	VX9700__	*VX3700__	2	47mm	SB628	SB631
Shaver Socket	VX9800__	*VX3800__	2	47mm	SB628	SB631
Telephone Master Socket	VX9974__	*VX3974__	1	25mm	SB655	SB619
Telephone Secondary Socket	VX9984__	*VX3984__	1	25mm	SB655	SB619
1 gang Co-Axial TV Socket	VX9992__	*VX3992__	1	25mm	SB655	SB619
2 gang Co-Axial TV Socket	VX9993__	*VX3993__	1	25mm	SB655	SB619
1 gang Blanking off plate	VX9991__	*VX3991__	1	16mm	SB623	SB619
2 gang Blanking off plate	VX9996__	*VX3996__	2	16mm	SB633	SB629
1 gang 1 module communication plate	VX9061__	*VX3061__	1	16mm	SB623	SB619
1 gang 2 module communication plate	VX9062__	*VX3062__	1	16mm	SB623	SB619

*Note: Box size is based on boxes being mounted at least 5mm below plaster depth

BRITISH STANDARDS

Light Switches	BS EN 60669-1
Intermediate Switches	BS EN 60669-1
Pull Switches	BS EN 60669-1
Fan Isolator	BS EN 60974-3
Toggle Switch	BS EN 60669-1
Standard Dimmer	BS EN 55014, BS EN 60669-1
Low Voltage Dimmer	BS EN 55014, BS EN 60669-1
Touch & Remote Dimmer	BS EN 55014, BS EN 60669-1

BRITISH STANDARDS

Switched Sockets	BS EN 1363
Fuse Connection Units	BS EN 1363
20A DP Switches	BS EN 60669-1
45A DP Switches	BS EN 60669-1
Shaver Socket	BS EN61558
Co-Axial Socket	BS 3041