



Available Finishes: KSR1350/1351/1354 - Black  
KSR1352/1353/1355 - Stainless Steel

Read these instructions before commencing installation & retain them for future reference.

**IP44** **240V 6W LED**

**Important Information**

It is recommended that luminaires are installed by a qualified electrician ensuring the installation complies to current IEE wiring regulations & local building control.


These products are designed for connection to a 240V 50Hz supply. Any broken or damaged parts should be replaced as soon as possible. KSR will not accept responsibility for any claims arising from a poor installation.

**Important User Advice**

Always switch off mains supply before servicing.

**Installation Procedure**


- Ensure mains supply is turned off.
- Cut a 230mm by 94mm hole for fitting the luminaire directly into an existing wall.
- Fix the back box into the wall.
- Remove the hex bolts and retain bolts, frame and glass.
- Unscrew and remove the LED board.
- Terminate wiring to the circuit board using terminals. (Brown - Live and Blue - Neutral).
- Ensure that the fitting is Earthed as it is a class I product.
- Fix the body into the back box using the screws supplied.
- Replace the LED board.
- Replace the glass.
- Fit the frame or optional grille frame (KSR1354 or KSR1355) ensuring the seals are in place. Grease and re-fit the hex bolts tightening uniformly do not over tighten.
- Turn on mains supply and test.

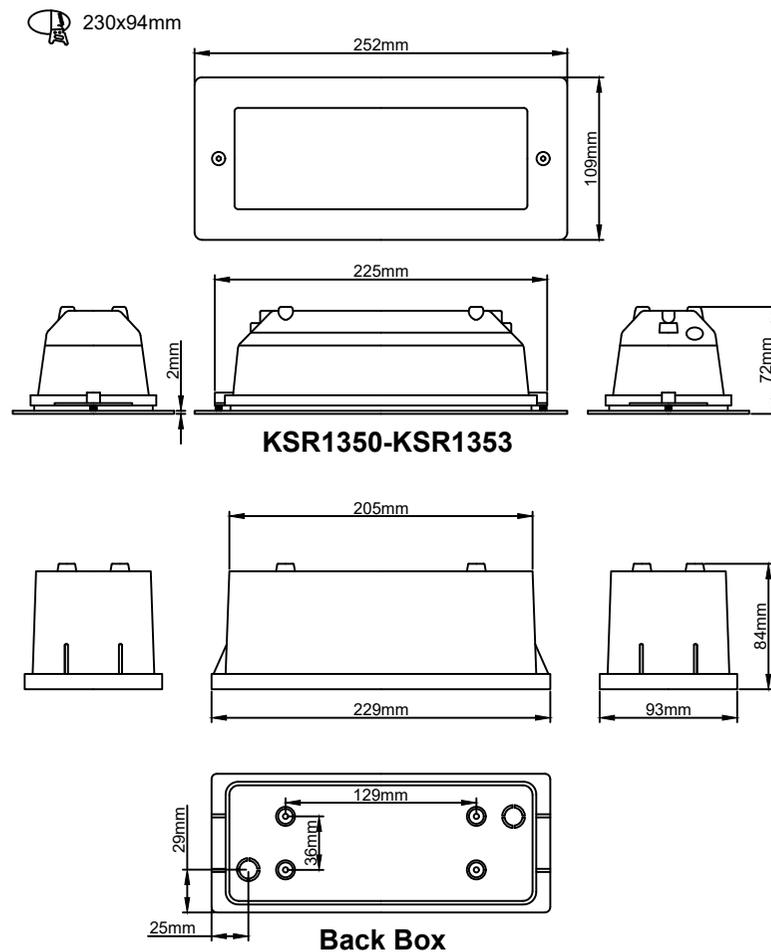

**KSR1350-KSR1353**

**Back Box**

**KSR1354 & KSR1355**

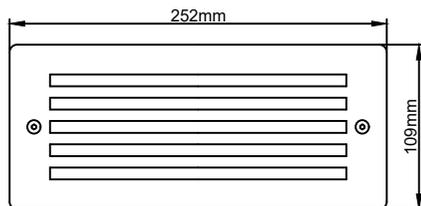

**Lamp Details**

KSR1350 - 3000K KSR1351 - 4000K  
KSR1352 - 3000K KSR1353 - 4000K  
Wattage: 6W



KSR Lighting Aftersales: 023 92 674343  
E-mail: aftersales@ksrlighting.com