


Eaton.com

# Protective Devices Miniature Circuit Breakers PLN6

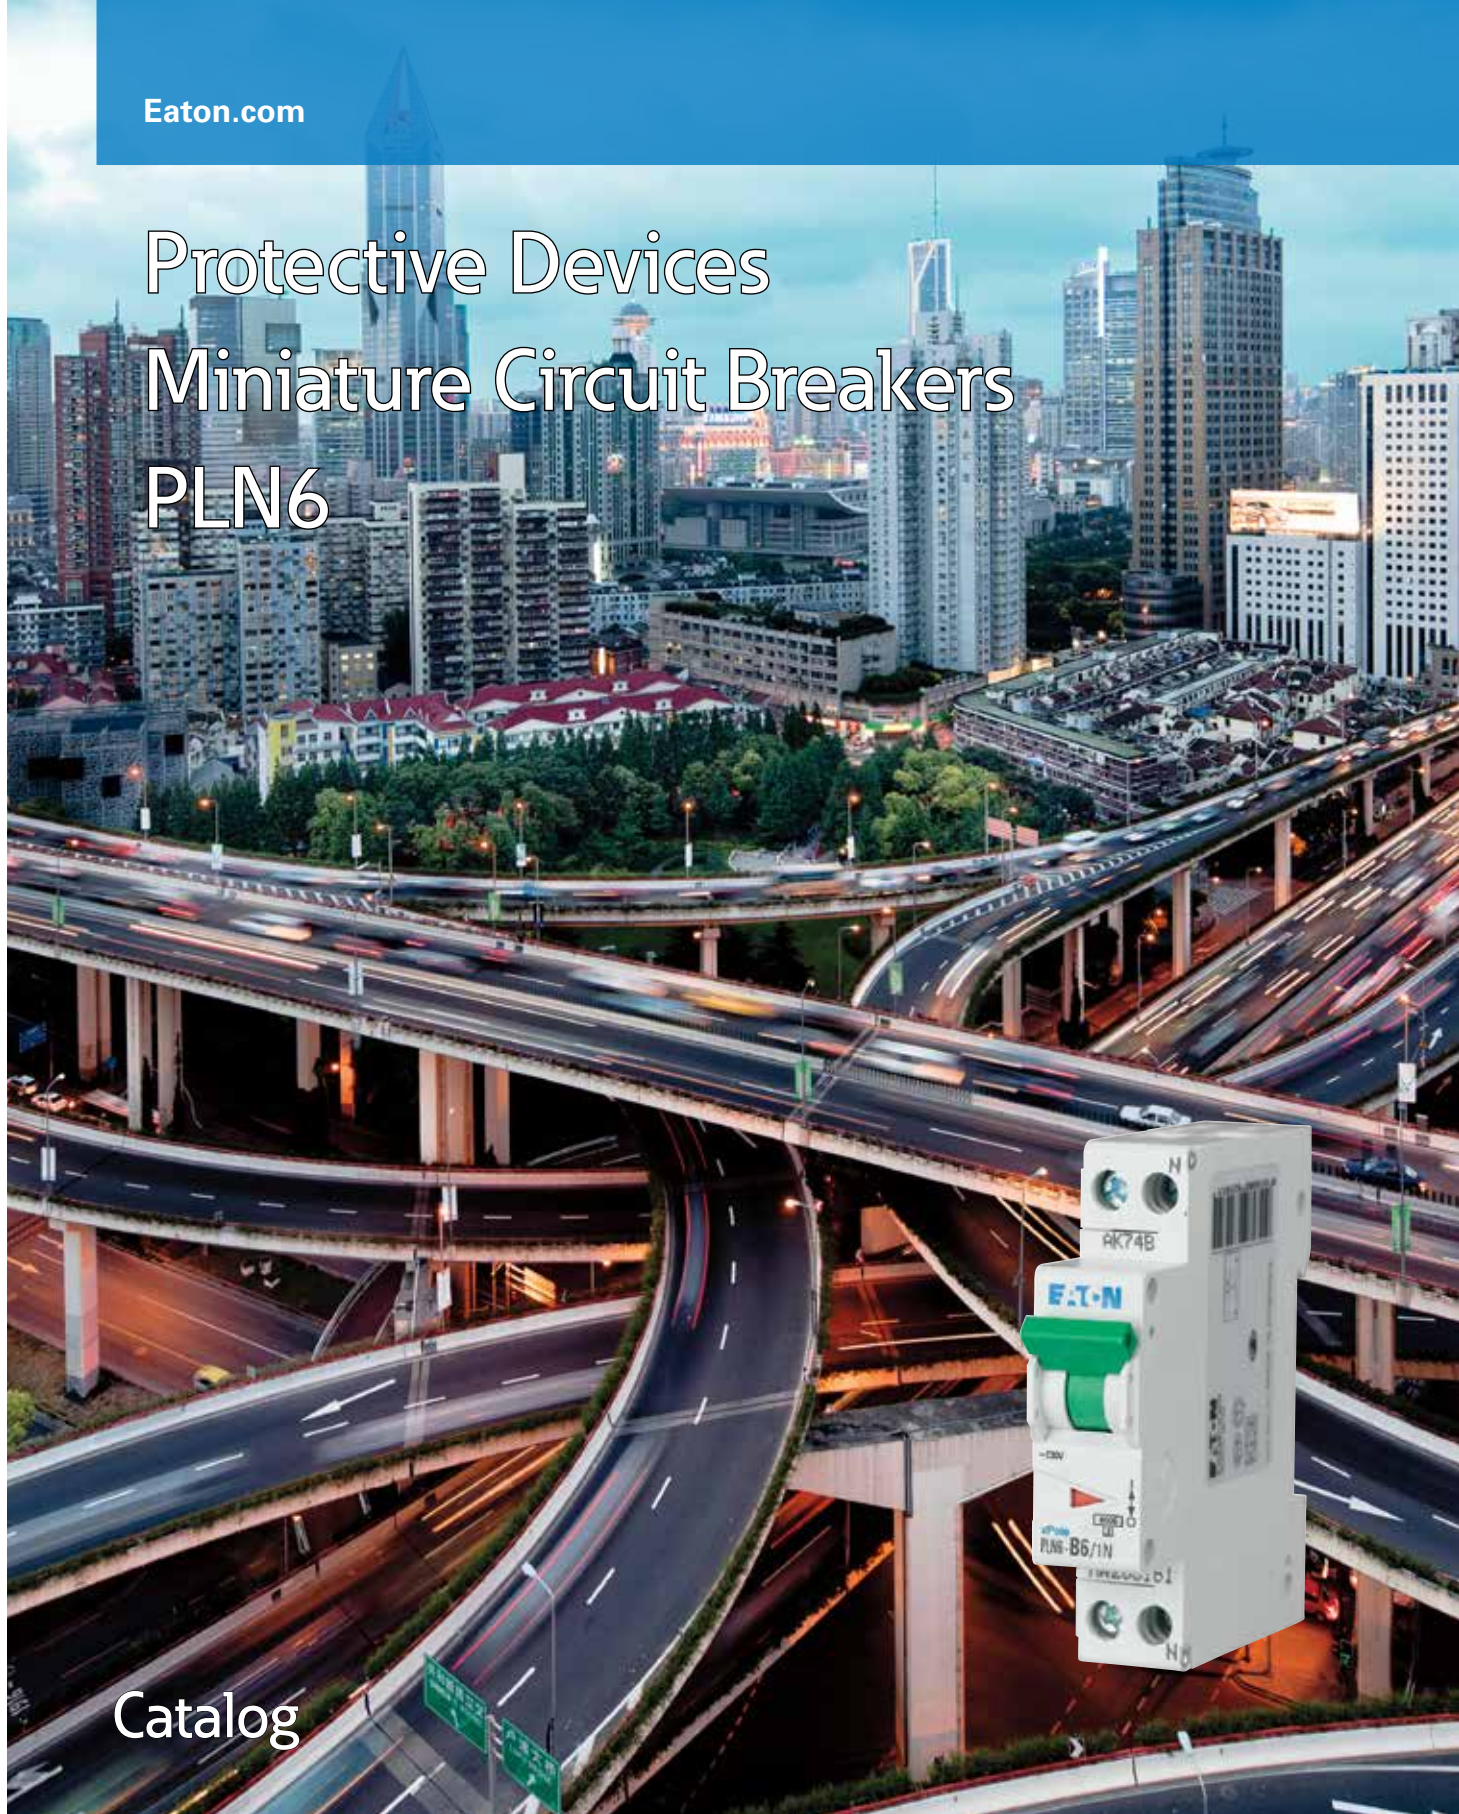

Catalog

**EATON**

*Powering Business Worldwide*

SG14511



## Description

- Top-quality miniature circuit breakers 1P+N with a width of 1 module unit requiring little space for installation
- Contact position indicator red - green
- Guide for secure terminal connection
- Comprehensive range of accessories can be mounted subsequently
- Rated currents up to 40 A
- Tripping characteristics B, C
- Rated breaking capacity 6 kA according to IEC/EN 60898-1

### Miniature Circuit Breakers PLN6 (MW)

SG14511



Rated current $I_n$ (A)	Type Designation	Article No.	Units per package
----------------------------	---------------------	-------------	----------------------

#### 6 kA, Characteristic B

##### 1+N-pole

6	PLN6-B6/1N	263161	12/120
10	PLN6-B10/1N	263162	12/120
13	PLN6-B13/1N	263163	12/120
16	PLN6-B16/1N	263164	12/120
20	PLN6-B20/1N	263165	12/120
25	PLN6-B25/1N	263166	12/120
32	PLN6-B32/1N	263167	12/120
40	PLN6-B40/1N	263168	12/120

SG14511



#### 6 kA, Characteristic C

##### 1+N-pole

2	PLN6-C2/1N	263169	12/120
4	PLN6-C4/1N	263170	12/120
6	PLN6-C6/1N	263171	12/120
10	PLN6-C10/1N	263172	12/120
13	PLN6-C13/1N	263173	12/120
16	PLN6-C16/1N	263174	12/120
20	PLN6-C20/1N	263175	12/120
25	PLN6-C25/1N	263176	12/120
32	PLN6-C32/1N	263177	12/120
40	PLN6-C40/1N	263178	12/120

**Specifications | Miniature Circuit Breakers PLN6**

**Description**

- High selectivity between MCB and back-up fuse due to low let-through energy
- Busbar positioning optionally above or below
- Compatible with standard busbar
- Switching toggle in colour designating the rated current
- Meets the requirements of insulation co-ordination, distance between contacts  $\geq 4$  mm, for secure isolation
- 1-pole breaking capacity  $I_{cn1} = 3$  kA

**Accessories:**


Auxiliary switch for subsequent installation	ZP-IHK	286052
	ZP-WHK	286053
Tripping signal switch for subsequent installation	ZP-NHK	248437
Remote control and automatic switching device	Z-FW/LP	248296
Shunt trip release	ZP-ASA/..	248438, 248439
Undervoltage release	Z-USA/..	248288-248291

**Busbars:** see chapter busbar systems


**Technical Data**

		PLN6
<b>Electrical</b>		
Design according to		IEC/EN 60898-1
Current test marks as printed onto the device		
Rated voltage	$U_n$	230 VAC
Rated frequency		50/60 Hz
Rated breaking capacity according to IEC/EN 60898-1	$I_{cn}$	
PLN6		6 kA
PLN4		4.5 kA
Characteristic		B, C
Back-up fuse		
>6 kA		max. 100 A gL/gG
>4.5 kA		max. 80 A gL/gG
Selectivity class		3
Endurance electrical components		$\geq 8,000$ switching operations
<b>Mechanical</b>		
Frame size		45 mm
Device height		80 mm
Device width		17.5 mm (1MU for 1+N)
Mounting		quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection		IP20
Upper and lower terminals		open-mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1-16 mm <sup>2</sup>

**Connection diagram**




**Dimensions (mm)**




#### Load Capacity PLN6


Load capacity in case of MCB block installation

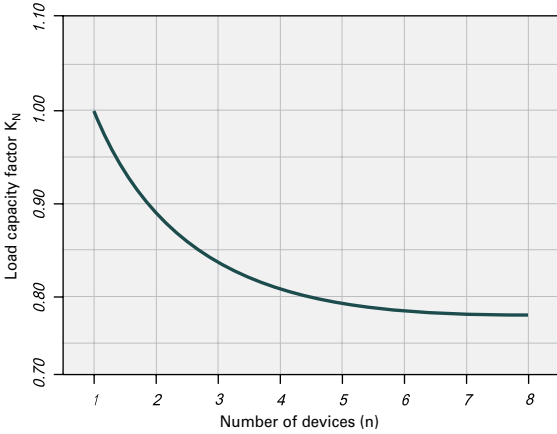


Current carrying capacity at ambient temperature ( $I_n = 2-13 A$ )

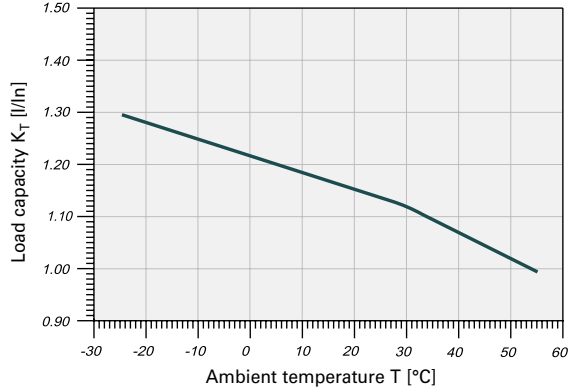

Current carrying capacity at ambient temperature ( $I_n = 16-25 A$ )

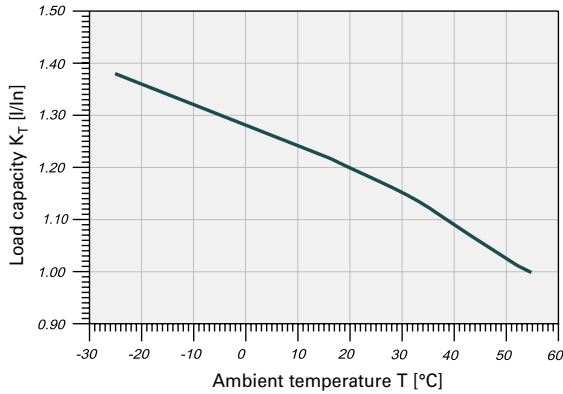


Current carrying capacity at ambient temperature ( $I_n = 32, 40 A$ )

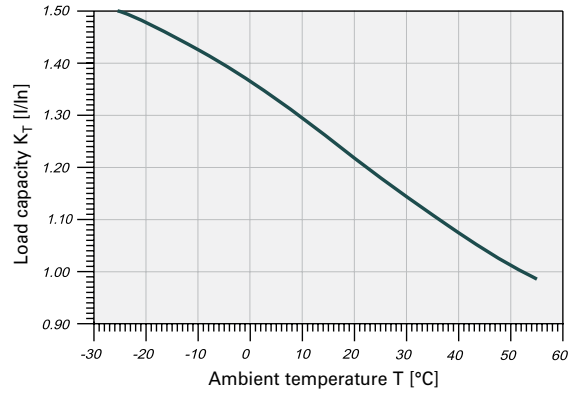


Permitted permanent load at ambient temperature T (°C) with n devices:  $I_{DL} = I_n K_T(T) K_N(N)$ .

#### Let-through Energy PLN6

Maximum let-through energy PLN6, Characteristic B

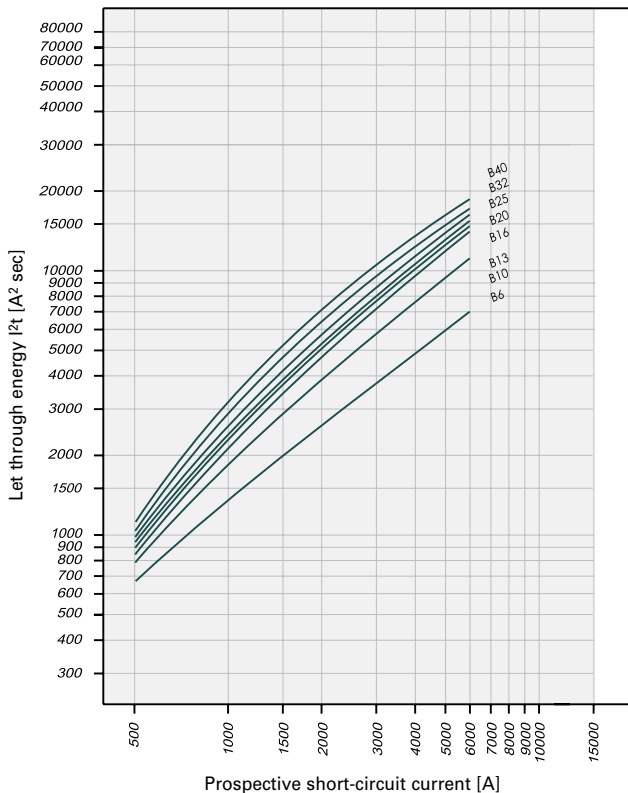

Maximum let-through energy PLN6, Characteristic C

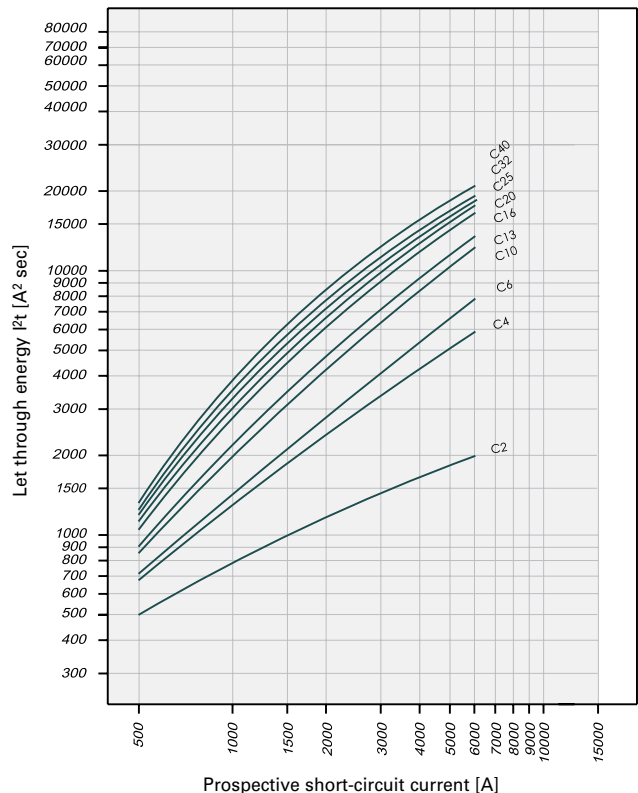


Determined according to 60898-1.

**Short-circuit Selectivity PLN6**

In case of short-circuit, there is selectivity between the miniature circuit breakers PLN6 and the upstream fuses up to the specified values of the selectivity limit current  $I_s$  [kA] (i. e. in case of short-circuit currents  $I_{ks}$  under  $I_s$  only the MCB will trip, in case of short-circuit currents above this value both protective devices will respond).

\*) basically in accordance with EN 60898-1 D.5.2.b



Short-circuit selectivity **Characteristic B** towards fuse link **DII-DIV\***)

PLN6	DII-DIV gL/gG						
$I_n$ [A]	20	25	35	50	63	80	100
6	0.7	1.2	2.9	4.5	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
10	0.6	0.9	1.9	3.1	5.7	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
13	0.5	0.7	1.5	2.5	4.5	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
16	0.5	0.7	1.4	2.3	4.3	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
20	0.5	0.7	1.4	2.2	4.0	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
25	0.5	0.6	1.3	2.0	3.8	5.8	6.0 <sup>2)</sup>
32	0.5	0.6	1.2	1.8	3.4	5.5	6.0 <sup>2)</sup>
40	<0.5 <sup>1)</sup>	0.6	1.1	1.7	3.1	5.0	6.0 <sup>2)</sup>

Short-circuit selectivity **Characteristic C** towards fuse link **DII-DIV\***)

PLN6	DII-DIV gL/gG						
$I_n$ [A]	20	25	35	50	63	80	100
2	1.5	3.8	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
4	0.7	1.2	3.3	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
6	0.7	1.1	2.6	4.5	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
10	0.5	0.8	1.7	2.8	5.2	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
13	0.5	0.7	1.5	2.5	4.5	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
16	0.5	0.6	1.2	2.0	3.6	5.6	6.0 <sup>2)</sup>
20	0.5	0.6	1.2	1.8	3.3	5.1	6.0 <sup>2)</sup>
25	<0.5 <sup>1)</sup>	0.6	1.1	1.7	3.0	4.8	6.0 <sup>2)</sup>
32	<0.5 <sup>1)</sup>	0.6	1.0	1.6	2.8	4.5	6.0 <sup>2)</sup>
40	<0.5 <sup>1)</sup>	0.6	1.0	1.5	2.6	4.0	6.0 <sup>2)</sup>

Short-circuit selectivity **Characteristic B** towards fuse link **D01-D03\***)

PLN6	D01-D03 gL/gG						
$I_n$ [A]	20	25	35	50	63	80	100
6	0.6	0.9	2.5	5.5	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
10	0.5	0.8	1.6	3.4	5.0	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
13	0.5	0.7	1.3	2.7	4.0	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
16	0.5	0.6	1.3	2.5	3.8	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
20	<0.5 <sup>1)</sup>	0.6	1.3	2.4	3.6	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
25	<0.5 <sup>1)</sup>	0.6	1.2	2.3	3.3	5.8	6.0 <sup>2)</sup>
32	<0.5 <sup>1)</sup>	0.6	1.1	2.1	3.0	5.5	6.0 <sup>2)</sup>
40	<0.5 <sup>1)</sup>	0.6	1.0	2.0	2.8	4.9	6.0 <sup>2)</sup>

Short-circuit selectivity **Characteristic C** towards fuse link **D01-D03\***)

PLN6	D01-D03 gL/gG						
$I_n$ [A]	20	25	35	50	63	80	100
2	1.1	2.0	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
4	0.6	0.9	2.7	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
6	0.6	0.9	2.3	5.0	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
10	0.5	0.7	1.5	3.0	4.5	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
13	0.5	0.7	1.3	2.7	4.0	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
16	<0.5 <sup>1)</sup>	0.6	1.1	2.2	3.1	5.5	6.0 <sup>2)</sup>
20	<0.5 <sup>1)</sup>	0.6	1.1	2.1	2.9	5.2	6.0 <sup>2)</sup>
25	<0.5 <sup>1)</sup>	0.5	1.0	2.0	2.7	4.8	6.0 <sup>2)</sup>
32	<0.5 <sup>1)</sup>	0.5	1.0	1.9	2.6	4.5	6.0 <sup>2)</sup>
40	<0.5 <sup>1)</sup>	0.5	0.9	1.7	2.3	4.0	6.0 <sup>2)</sup>

Short-circuit selectivity **Characteristic B** towards fuse link **NH-00\***)

PLN6	NH-00 gL/gG								
$I_n$ [A]	20	25	32	35	40	50	63	80	100
6	0.5	0.9	1.5	2.3	3.2	4.9	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
10	<0.5 <sup>1)</sup>	0.7	1.2	1.5	2.0	3.1	3.9	5.9	6.0 <sup>2)</sup>
13	<0.5 <sup>1)</sup>	0.6	1.0	1.3	1.7	2.5	3.1	4.6	6.0 <sup>2)</sup>
16	<0.5 <sup>1)</sup>	0.6	1.0	1.3	1.6	2.4	2.9	4.5	6.0 <sup>2)</sup>
20	<0.5 <sup>1)</sup>	0.5	0.9	1.3	1.5	2.3	2.8	4.3	6.0 <sup>2)</sup>
25	<0.5 <sup>1)</sup>	0.5	0.9	1.1	1.4	2.1	2.6	4.0	6.0 <sup>2)</sup>
32	<0.5 <sup>1)</sup>	0.5	0.8	1.0	1.3	1.9	2.4	3.6	6.0 <sup>2)</sup>
40	<0.5 <sup>1)</sup>	0.5	0.8	0.9	1.1	1.7	2.2	3.3	6.0 <sup>2)</sup>

Short-circuit selectivity **Characteristic C** towards fuse link **NH-00\***)

PLN6	NH-00 gL/gG								
$I_n$ [A]	20	25	32	35	40	50	63	80	100
2	0.7	2.1	6.0	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
4	0.5	0.9	1.6	2.6	3.7	6.0	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
6	0.5	0.8	1.4	2.1	2.9	4.5	5.7	6.0 <sup>2)</sup>	6.0 <sup>2)</sup>
10	<0.5 <sup>1)</sup>	0.6	1.0	1.4	1.9	2.8	3.5	5.2	6.0 <sup>2)</sup>
13	<0.5 <sup>1)</sup>	0.6	0.9	1.3	1.7	2.5	3.1	4.7	6.0 <sup>2)</sup>
16	<0.5 <sup>1)</sup>	0.5	0.7	1.0	1.3	2.0	2.5	3.8	6.0 <sup>2)</sup>
20	<0.5 <sup>1)</sup>	0.5	0.7	0.9	1.2	1.8	2.3	3.5	6.0 <sup>2)</sup>
25	<0.5 <sup>1)</sup>	0.5	0.7	0.9	1.1	1.6	2.1	3.3	6.0 <sup>2)</sup>
32	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	0.8	1.1	1.5	2.0	3.1	6.0 <sup>2)</sup>
40	<0.5 <sup>1)</sup>	<0.5 <sup>1)</sup>	0.6	0.8	1.0	1.4	1.9	2.9	6.0 <sup>2)</sup>

<sup>1)</sup> Selectivity limit current  $I_s$  under 0.5 kA

<sup>2)</sup> Selectivity limit current  $I_s$  = rated breaking capacity  $I_{cn}$  of the MCB

Eaton's electrical business is a global leader with deep regional application expertise in power distribution and circuit protection; power quality, backup power and energy storage; control and automation; life safety and security; structural solutions; and harsh and hazardous environment solutions. Through end-to-end services, channel and an integrated digital platform & insights Eaton is powering what matters across industries and around the world, helping customers solve their most critical electrical power management challenges.

For more information, visit [Eaton.com](https://www.eaton.com).



**Eaton Industries (Austria) GmbH**  
Scheydgasse 42  
1210 Vienna  
Austria

**Eaton**  
EMEA Headquarters  
Route de la Longeraie 7  
1110 Morges, Switzerland  
Eaton.eu

© 2020 Eaton  
All Rights Reserved  
Printed in Austria  
Publication No. CA019073EN  
Article number 302797-MK  
August 2020  
Graphics: SRA, Schrems

Changes to the products, to the information contained in this document, and to prices are reserved; as are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

