

Complete and reliable solar fusible circuit protection



Powering Business Worldwide



Eaton has more than 100 years of proven technical innovation to help make your operation more productive while protecting your equipment.

Solar Photovoltaic (PV) systems have evolved into a mature, sustainable and adaptive technology. The growth in installations and demand for PV systems necessitate effective electrical protection. PV systems, as with all electrical power systems, must have appropriate overcurrent and overvoltage protection.

Eaton has worked closely with solar system manufacturers, and through coordinated research and development, has produced revolutionary photovoltaic fuse links which work in combination with solar array combiner systems to offer a complete protection for PV applications.

Table of contents

| Section | Page |
|---|-------|
| Eaton's Bussmann series solar technology solution | 4 - 5 |
| Introduction | 6 |
| IEC 60269-6 gPV standard | 6 |
| Photovoltaic module | |
| Construction | 7 |
| Output | 7 |
| String protection | |
| Overview | 8 |
| How to select fuse links for string protection | 9 |
| Worked example | 10 |
| Array Protection | |
| Overview | 11 |
| How to select fuse links for array protection | 12 |
| Worked example | 13 |
| Solar fuse links overview | 14 |
| 10 x 38 mm PVM fuse links | 15 |
| 10 x 38 mm PV-A10 fuse links | 17 |
| CHPV Modular fuse holders | 22 |
| 10 x 85 mm PV-A10F85L fuse links | 23 |
| CHPV15H85 fuse holder | 25 |
| 14 x 51 PV-A14F fuse links | 26 |
| CHPV14 Modular fuse holders | 28 |
| FW14-PCB Mountable fuse clips | 29 |
| 14 x 65 mm PV-A14L fuse links | 30 |
| NH style PV-ANH fuse links | 34 |
| NH Bases SD-D-PV | 43 |
| Flush end PV-AF fuse links | 45 |
| XL style PVXL fuse links | 48 |
| SD-S-PV XL Bases | 62 |
| NH Style 800 V a.c. 170M fuse links | 63 |
| 170H Microswitches | 68 |
| Index | 70 |

Eaton's Bussmann series solar technology solution

PVM, 10 x 38, 10 x 85, 14 x 51, 14 x 65 mm photovoltaic fuse links. Rated voltage: from 600 V d.c. to 1500 V d.c.



1

CHPV fuse holder, Rated voltage: up to 1500 V d.c.



1

BM series fuse block



1

PV Flush end fuse links. Rated voltage: 1000 V d.c.



2


3

NH Style photovoltaic fuse links and fuse holders. Rated voltage: 1000 V d.c.




2

XL Style photovoltaic fuse links and fuse bases. Rated voltage: 1000 and 1500 V d.c.



2

Square body, BS and UL High speed fuse links. Rated voltage: Up to 4000 V d.c.





3


NH Low voltage fuse links and fuse holders. Rated voltage: 400, 500 and 690 V a.c.



4


String protection

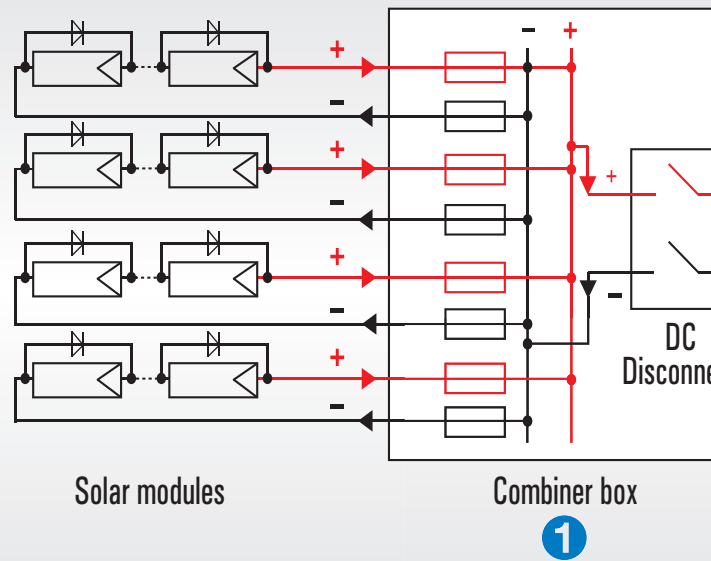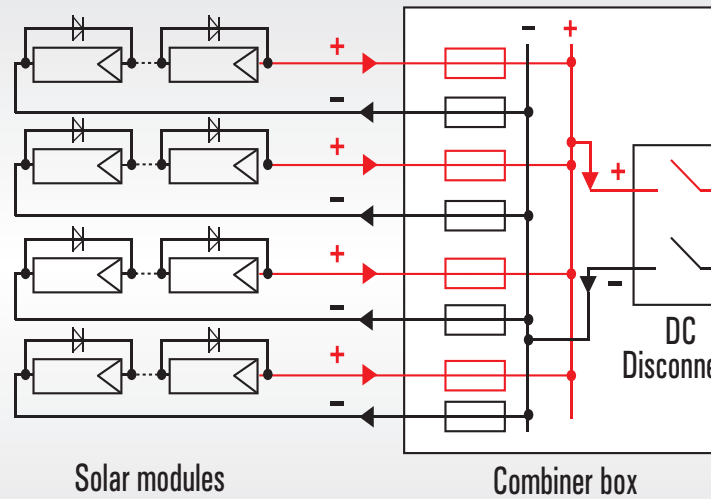

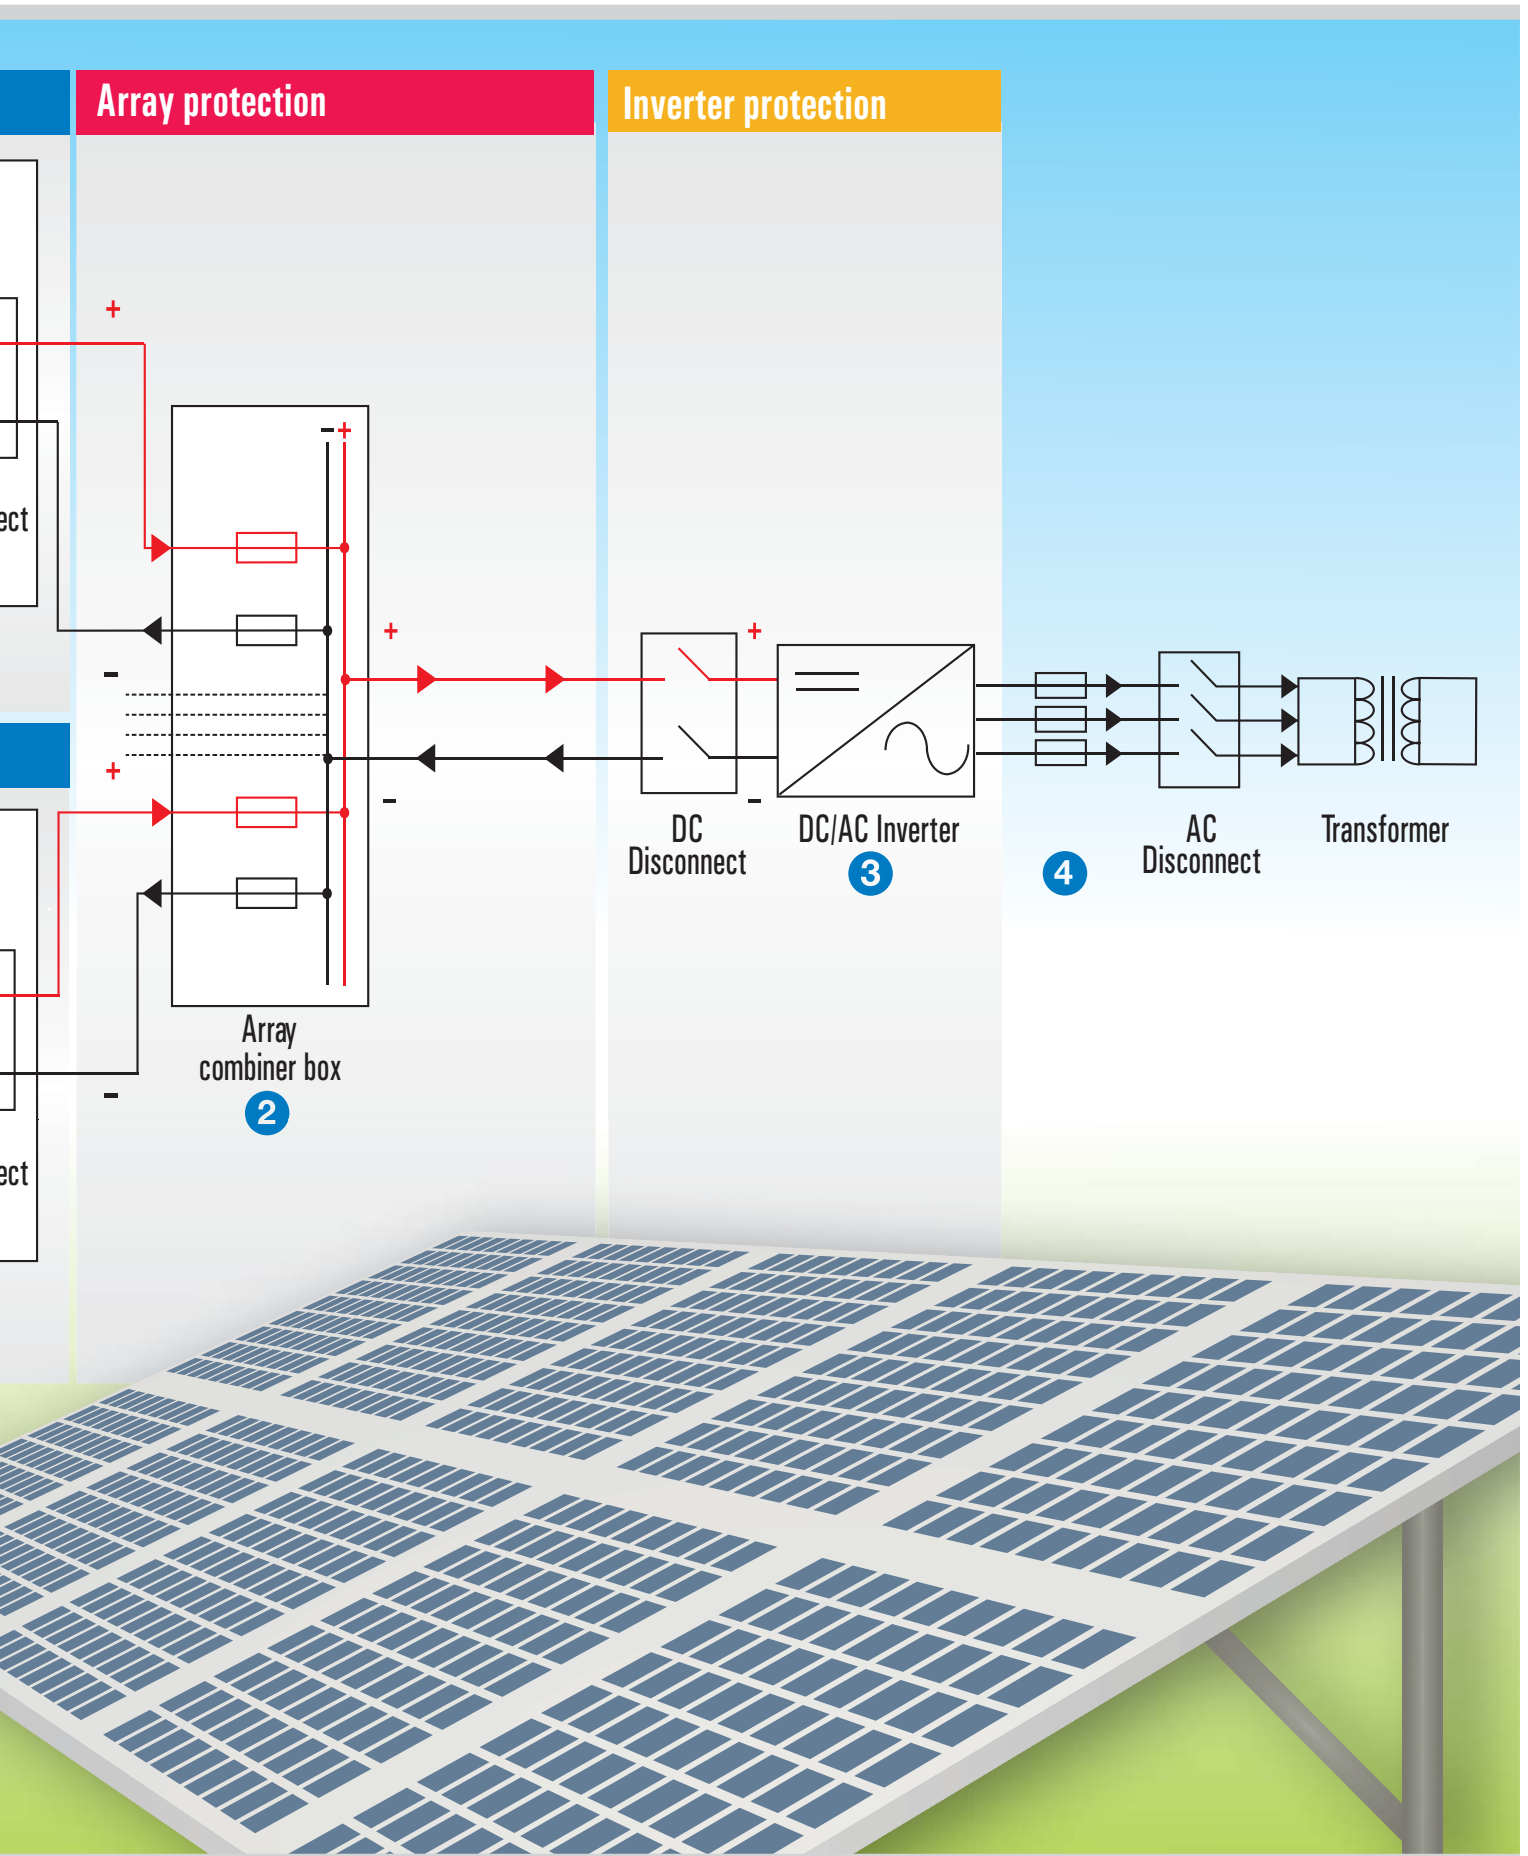

Introduction

The global transition from fossil fuels to renewable sources is well under way. Photovoltaic (PV) have proven to offer an environmentally sustainable solution to our ever increasing energy demands while also being cost competitive. This has led to the increase of installed capacity of PV systems from 574 GW in 2019 growing to 1064 GW expected by 2023. This rapid growth size and output capacity of these installations has challenged system designers, manufacturers and standards organisations due to the specific demands associated with PV installation in terms of current, voltage, and ambient temperature. These requirements have also been considered in the development of international protection standards for PV installations, which Eaton, the leading name in electrical protection, has used to develop PV specific protection devices.

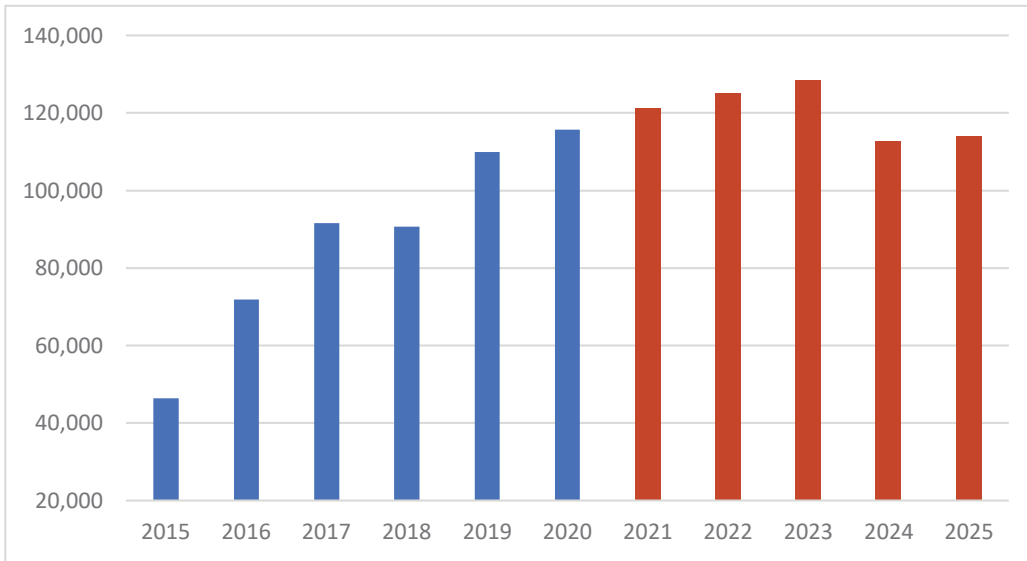

Global annual photovoltaic installations (Megawatt). Source: EPIA

IEC 60269-6 gPV standard

Unlike typical grid connected AC systems, the available short-circuit current within PV systems is limited and the overcurrent protective devices need to operate effectively on low levels of fault current. For this reason Eaton has conducted extensive research and development of fuse links that are specifically designed and tested to safely protect PV systems with high DC voltages and low fault currents.

The International Electrotechnical Commissions (IEC) recognise the protection of PV systems is different to standard electrical installations. This is reflected in IEC 60269-6 which defines specific characteristics that a fuse link is required to meet for protecting PV systems, utilisation class gPV. Eaton's Bussmann series string and branch PV fuse links have been specifically designed to meet this standard. However, Eaton's Bussmann series PV fuse links exceed the requirements of IEC 60269-6 as they operate at $1.35 \times I_n$ (1.35 times the nominal current). They also meet the requirements of UL 2579 and are thus suitable for protecting PV modules in reverse current situations.

Whilst the standard does not recognise a specific symbol, the combination of the symbols for fuse link and strings are often used to indicate a fuse link is suitable for protecting strings in PV systems, see Figure 1.



Figure 1

Photovoltaic module construction

- A photovoltaic (PV) cell is usually between 4" and 6" square.
- A number of individual cells are combined in a module (often called a panel).
- A number of PV modules in series is referred to as a string.
- A number of strings in parallel is referred to as an array.

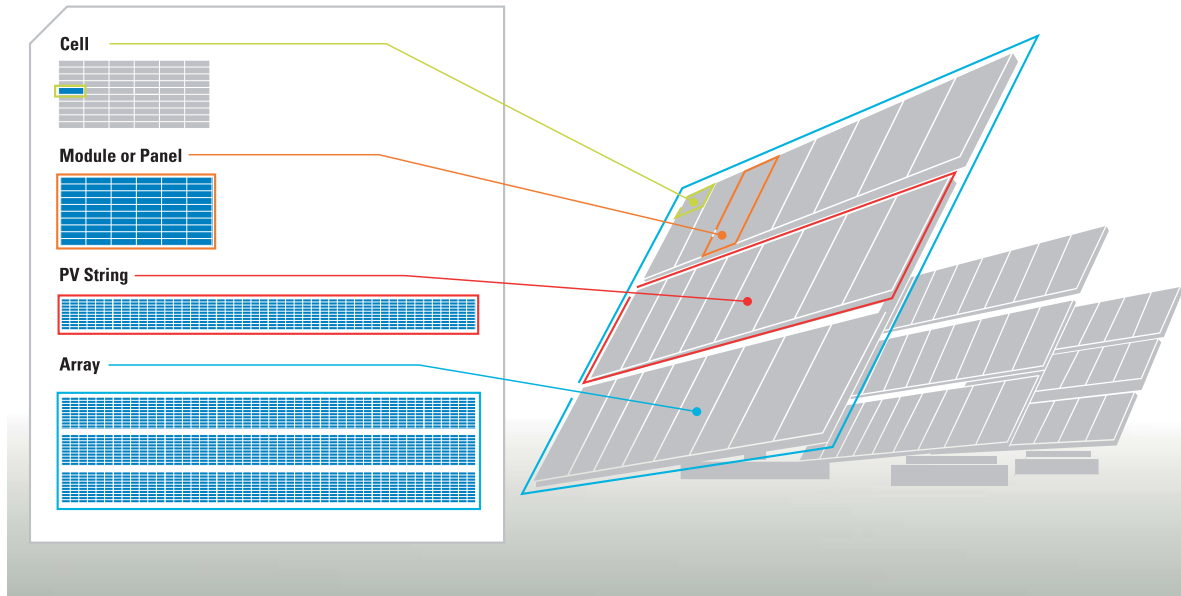


Figure 2

Photovoltaic module output

The voltage output of a PV module is defined by the number of cells in series that form the module.

The current output of a PV module is dependent on the area of a cell.

The most widely used solar modules are made with 4", 5" and 6" poly-crystalline silicon cells. This type of module using 6" cells, can achieve approximately 8 Amps maximum power point (MPP) current per module with a typical voltage output of around 30 Volts.

With thin film technology typical output is 2.5 Amps and 40 Volts.

The maximum power point current of the modules vary between manufacturers of equal solar cell dimensions. When selecting the appropriate fuse links, the specified Short Circuit Current (I_{SC}) and reverse current characteristics specified by the manufacturers should be used.

The specifications provided by the module manufacturer should be consulted to confirm the output currents and voltages of the modules under the range of conditions expected for the proposed installation. These conditions are influenced by the ambient temperature, the incident angle of sunlight and the amount of solar energy reaching the module. These are usually mentioned as coefficients on the manufacturer's specifications.

Manufacturers also suggest the maximum series fuse rating or a reverse current rating. Both of these are based on modules surviving 1.35 times this rating for two hours.



Overview of string protection

Depending on the desired capacity of the Photovoltaic (PV) system, there may be several PV strings connected in parallel to achieve higher currents and subsequently more power.

PV systems that have three or more strings connected in parallel need to have each string protected. Systems that have less than three strings will not generate enough current to damage the modules in the event of a fault. Therefore they do not present a safety hazard, provided the conductor is sized correctly, based on local codes and installations requirements.

Where three or more strings are connected in parallel, a fuse link in each string will protect the cables and modules from overcurrent faults and help minimise any safety hazards. It will also isolate the faulted string so that the rest of the PV system can continue to generate electricity.

It should be remembered that PV modules current output changes with the module temperature as well as the amount of sun they are exposed to. The exposure is dependant on irradiance level, incline as well as shading effect from trees, buildings or clouds. In operation, fuse links, as thermal devices, are influenced by ambient temperature. The current capability of Eaton's Bussmann series PV string fuse links should be derated according to the curves below.

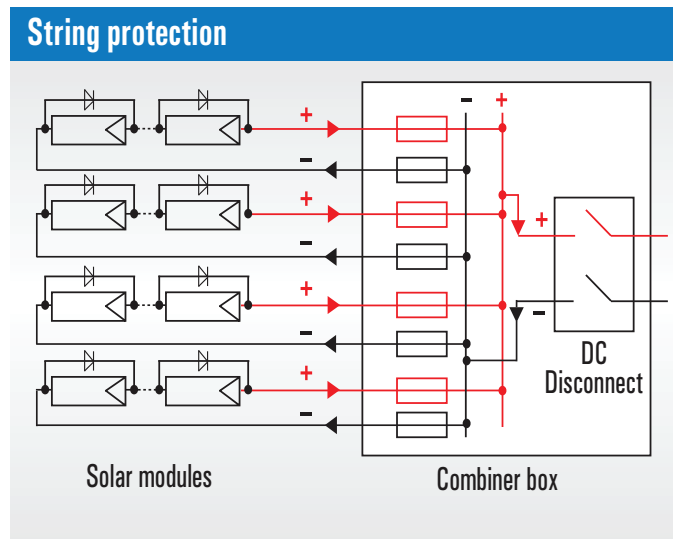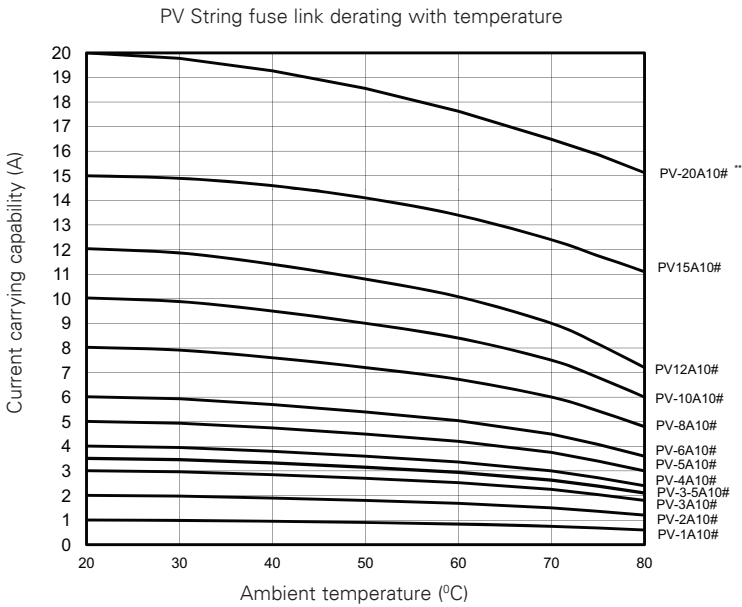

How to select fuse links for string protection

Whilst a full study of all the parameters is recommended, the following factors should be used: 1.56 for current and 1.2 for voltage when selecting the fuse link. These cover most variations due to installation. The same method should be adopted for crystalline and thin film modules.

If your PV installation is subject to extremes of high altitude, high irradiance, or low temperature, please consult Eaton's Field Application Engineers: bulehighspeedtechnical@eaton.com.

Define the specifications of the PV module

Criteria

I_{sc} : Short-circuit current of the module at Standard Test Conditions (STC) - Data provided by the PV Manufacturer

V_{oc} : Open circuit voltage of one module at STC - Data provided by the PV Manufacturer

N_s : Number of modules in series per string

N_p : Number of strings in parallel per array

$I_{mod_max_OCPR}$: The PV module maximum overcurrent protection rating specified by IEC 61730-2 (this is often specified by module manufacturers as the maximum series fuse rating)

If $N_p \leq 3$ and the cable is rated at $1.56 \times I_{sc}$


For PV installations with three or less parallel strings and string cables adequately sized, fusing might be needed if local installation regulations or codes require them.

However Eaton recommends fuse links protection in all PV systems as unpredicted fault currents may occur in the event of inverter failure where batteries are connected to the strings.

If $N_p > 3$

The fuse link's rating should be selected as follows:

- Voltage rating $\geq 1.20 \times V_{oc} \times N_s$
- Current rating $\geq 1.56 \times I_{sc}$
- Check the current carrying capability of the selected fuse after derating at the ambient temperature of the fuse still satisfies the above criteria
- Current rating $\leq I_{mod_max_OCPR}$
- Current rating $\leq I_z$ = string cable rating
- Altitude derating

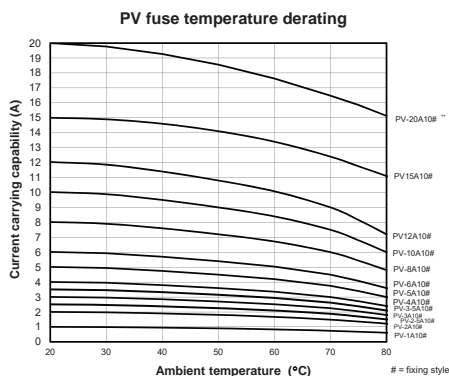

For PV application with fuse links installed at high altitudes, there is reduced cooling effect on the fuse as the density of the atmosphere reduces. For above 2000 metre sea level, every 100 metre increase will have 0.5% de-rate on the fuse current. Please consult Eaton's Fuse Application Engineers for further information: bulehighspeedtechnical@eaton.com

Cable protection

Fuse links are required to protect cables and PV modules to prevent fires and ensure the fuse could open a fault circuit safely during an overcurrent fault.

For $N_p \leq 3$, a fuse might not be required as stated above, but cable should be rated at $1.56 \times I_{sc}$ or higher.

For $N_p > 3$, a fuse is needed to protect both the PV modules and the cables. The cable should be rated big enough to carry the load current. If cable rating is too small, there is a risk of nuisance tripping. Also it is important to ensure the fuse link current rating < string cable rating for fuse to protect the cables.

String protection — worked example

Once it has been determined that the maximum short-circuit current exceeds the cable's continuous current rating, the recommendations for selecting the correct PV string fuse link are as follows:

Manufacturer's PV Module specifications

PV Module description

- Maximum system voltage: 1000 V d.c.

Electrical data

- Open circuit voltage (V_{oc}): 43.1 V
- Short-circuit current (I_{sc}): 5.37 A
- Maximum series fuse rating: ($I_{mod_max_OCPR}$): 15 A

PV Installation set-up

- 18 modules in series per string ($N_s = 18$)
- Maximum 60°C module
- Minimum -30°C module
- Maximum 45°C ambient fuse link
- 4 strings in parallel ($N_p = 4$)
- Cable size: 2.5 mm² ≥ cable rating $I_z = 11.5$ A at 60°C (manufacturer's data)

Calculation

- Cable rating ≥ $1.56 \times I_{sc} = 1.56 \times 5.37 = 8.38$ A. Selected cable $I_z = 11.5$ A → The selected cable is suitable

$$\begin{aligned} \text{String max short-circuit current } I_{sc_string} &= (N_p - 1) \times 1.25^* \times I_{sc} \\ &= (4 - 1) \times 1.25^* \times 5.37 \\ &= 20.1 \text{ A} \end{aligned}$$

I_{sc_string} (20.1 A > I_z (11.5 A), therefore string fuse links are needed.

* NEC states the maximum circuit current for PV circuit is defined as 1.25 multiplied by PV model rated short-circuit current I_{sc} or the sum of parallel PV module rated short-circuit.

- Minimum fuse current rating $I_n \geq 1.56 \times I_{sc}$
 $= 1.56 \times 5.37 = 8.38$ A

- Maximum fuse current rating $I_n \leq I_{mod_max_OCPR} = 15$ A
 $I_n \leq I_z \text{ cable rating} = 11.5$ A

- Minimum fuse voltage rating $U_n \geq 1.2 \times V_{oc} \times N_s$
 $= 1.2 \times 43.1 \times 18 = 931$ V

The selected fuse link needs to be rated at 10 A and 1000 V d.c.

Eaton's Bussmann series catalogue is PV-10A10F

The selected fuse link has current carrying capability of 9.3 A at 45°C ambient temperature, which is greater than the minimum fuse current rating (8.38 A). Therefore the fuse link selected will protect the cables and the modules against reverse current faults.




Overview of array protection

Depending on the desired capacity of the Photovoltaic (PV) system, there may be several PV strings connected in parallel to achieve higher currents and subsequently more power.

A fuse link on each array will protect the cables from fault current and help minimise any safety hazards. It will also isolate the faulted array so that the rest of the PV system can continue to generate electricity.

A fuse link positioned in the cable that carries the combined output of a number of strings should be protected by array fuse links. If a number of arrays are subsequently combined then a further fuse link should be incorporated.

It should be remembered that the characteristics of PV modules vary with module temperature as well as irradiance level. In operation fuse links are influenced by ambient temperature.

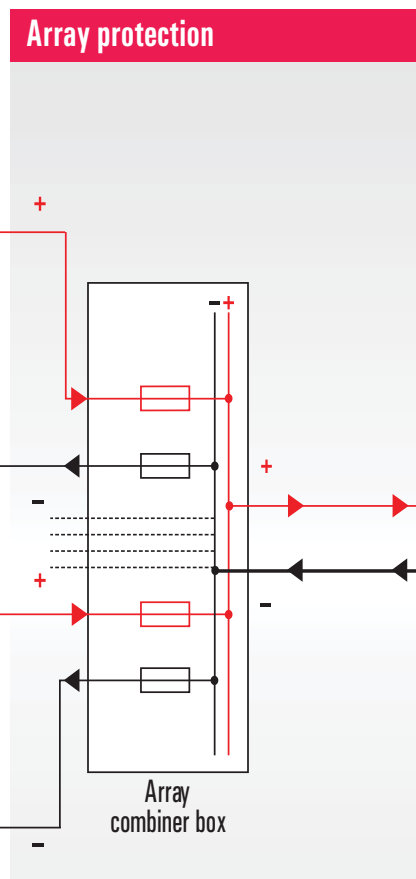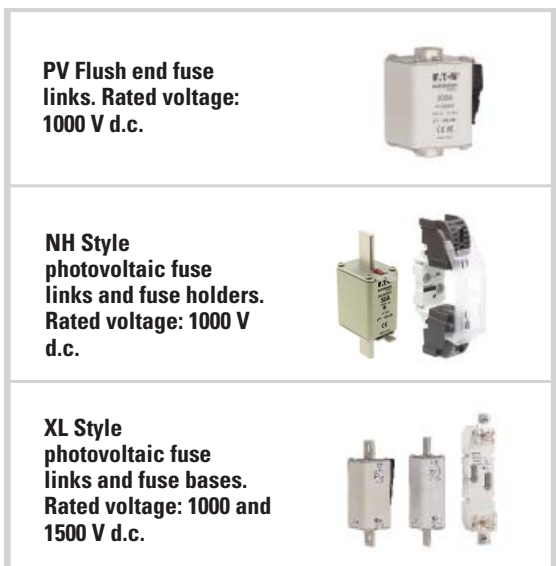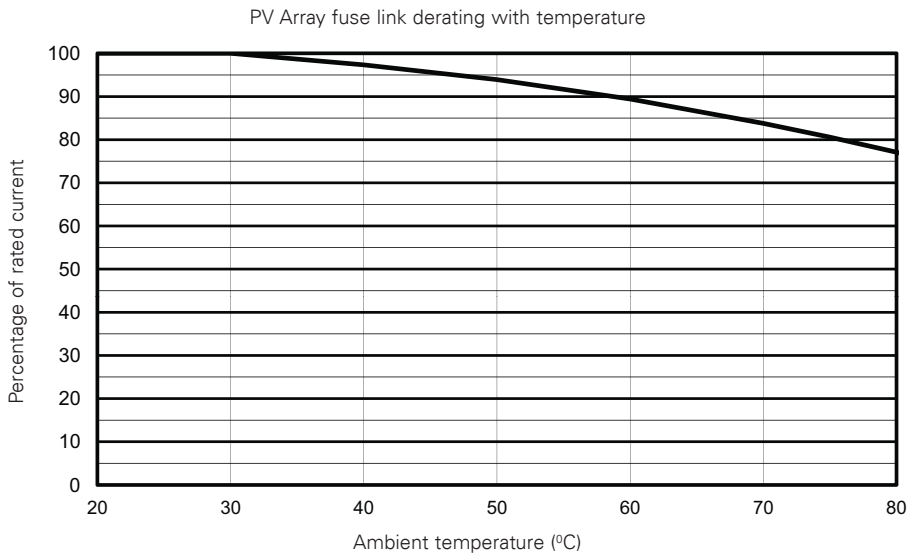

How to select fuse links for array protection

Whilst a full study of all the parameters is recommended, in general the following factors should be used: 1.56 for current and 1.2 for voltage when selecting the fuse link. These cover most variations due to installation. If you have concerns that your PV installation may be subject to extremes of high altitude, high irradiance, high or low temperature, please consult Eaton's technical team (bulehighspeedtechnical@eaton.com).

Define the specifications of the PV module

Criteria

I_{sc} : Short-circuit current of the module at Standard Test Conditions (STC) - Data provided by the PV Manufacturer

V_{oc} : Open circuit voltage of one module at STC - Data provided by the PV Manufacturer

N_s : Number of modules in series per string

N_p : Number of strings in parallel per array

N_A : Number of arrays in parallel

According to IEC 62548, 6.5.5.2 PV sub-array overcurrent protection. The nominal rated current (I_n) of overcurrent protection devices for PV sub-arrays shall be determined with following formula:

$$I_n > 1.25 \times I_{sc_Array} \text{ and } I_n \leq 2.4 \times I_{sc_Array}$$

In accordance with the National Electrical Code (NEC) fuses are selected using $1.56 \times I_{sc}$. As fuse manufacturer, Eaton's recommends the array fuse selection method below in order to satisfy both IEC and NEC requirements.

The fuse link's ratings should be selected as follows:

- Voltage rating $\geq 1.20 \times V_{oc} \times N_s$
- Current rating $\geq 1.56 \times I_{sc} \times N_p$
- Check the current carrying capability of the selected fuse link, after derating at the ambient temperature of the fuse still satisfies the above criteria
- Current rating $\leq I_z =$ array cable rating

Eaton recommends using Eaton's Bussmann series fuse links in both positive and negative cables, each with adequate voltage rating (as above). Selectivity with string fuse links may not be achieved under some fault conditions.

Array protection — worked example

Manufacturer's PV Module specifications

- $I_{sc} = 5.37 \text{ A}$
- $V_{oc} = 43.1 \text{ V}$
- Temperature coefficient of short-circuit current $\alpha = 0.053 \text{ \% / } ^\circ\text{C}$

PV Installation set-up

- Maximum irradiance level $1000\text{W/m}^2 \geq$ Irradiance factor $F2 = 1$
- 18 modules in series per string ($N_s = 18$)
- Maximum 60°C module Temperature factor $F1 = 1 + \alpha \times (T - 25^\circ\text{C}) = 1.02$
- Minimum -30°C module
- Maximum 45°C ambient fuse link. Derating factor for array fuses current carrying capability is 0.95 at 45°C ambient temperature
- Array cable size: $25 \text{ mm}^2 \geq$ cable rating $I_z = 98 \text{ A}$ at 60°C (Manufacturer's data)
- 8 strings in parallel ($N_p = 8$)
- 4 arrays in parallel ($N_A = 4$)

Calculation

- Cable rating $\geq 1.56 \times I_{sc} \times N_p$
 $= 1.56 \times 5.37 \times 8 = 67 \text{ A}$

Selected cable $I_z = 98 \text{ A}$ → The selected cable is suitable

- Array max short-circuit current $I_{sc_Array} = (N_A - 1) \times N_p \times I_{sc} \times F1 \times F2$
 $= (4-1) \times 8 \times 5.37 \times 1.02 \times 1 = 131 \text{ A}$

- $I_{sc_Array} (131 \text{ A}) > I_z = 98 \text{ A}$ (therefore array fuse links are required)

- Minimum fuse current rating $I_n \geq 1.56 \times I_{sc} \times N_p$
 $= 1.56 \times 5.37 \times 8 = 67 \text{ A}$

For PV application with fuse links installed at high altitudes, there is reduced cooling effect on the fuse as the density of the atmosphere reduces. For above 2000 metre sea level, every 100 metre increase will have 0.5% de-rate on the fuse current. Please consult Eaton's Fuse Application Engineers for further information: bulehighspeedtechnical@eaton.com

- Maximum fuse current rating: $I_n \leq I_z = 98 \text{ A}$
- Minimum fuse voltage rating: $U_n = 1.2 \times V_{oc} \times N_s$
 $= 1.2 \times 43.1 \times 18 = 931 \text{ V}$

The selected fuse link needs to be rated at 80 A and 1000 V d.c. Eaton's Bussmann series part number would be PV-80ANH1 or PV-80-A-01XL. The selected fuse link has current carrying capability of $80 \times 0.95 = 76 \text{ A}$ at 45°C ambient temperature, which is greater than the minimum fuse current rating (67 A).

Solar fuse links overview

| Body size | Fixings/Tags | Catalogue number | Rated voltage | Rated current | Fuse holder | Fuse bases | Fuse blocks | Fuse clips | Microswitches | Inline holders | |
|---------------------------|--------------------------------|---|--------------------|----------------|-------------|------------|-------------|------------|---------------|----------------|-----------------------|
| Ferrule fuse links | | | | | | | | | | | |
| 10x38 mm | N/A | PVM-(amps) | 600 V d.c. | 4 A to 30 A | CHPV | | BMM | 1A3400 | | HEB | |
| | N/A | PV-(amps)A10F | | | CHPV | | | 1A3400 | | HPV-DV | |
| | Bolt | PV-(amps)A10-T | 1000 V d.c. | 1 A to 20 A | | | | | | | |
| | PCB (one pin) | PV-(amps)A10-1P | | | | | | | | | |
| | PCB (two pins) | PV-(amps)A10-2P | | | | | | | | | |
| | Crimp terminal | PV-(amps)A10F-CT | | | | | | | | | |
| 10x85 mm | N/A | PV-A10F85L | 1500 V d.c. | 2.25 A to 30 A | CHPV15H85 | | | | | | |
| 14x51 mm | N/A | PV-(amps)A14F | 1100 / 1000 V d.c. | 15 A to 32 A | CHPV141(I)U | | | FW14-PCB | | | |
| 14x65 mm | N/A | PV-(amps)A14LF | 1500 / 1300 V d.c. | 15 A to 32 A | | | | | | | |
| | With tags | PV-(amps)A14L-T | | | | | | | | | |
| | With 10 mm fixings | PV-(amps)A14LF10F | | | | | | | | | |
| NH Fuse links | | | | | | | | | | | |
| 1 | Bladed with lugs | 170M7350 to 170M7358 | 800 V a.c. | 32 A to 200 A | | | | | | SD1-D | 170H0236 and 170H0238 |
| | Blade with bolt holes no lug | 170M7353-B to 170M7358-B | | 63 A to 200 A | | | | | | | |
| 2 | Bladed with lugs | 170M7397 to 170M7399 | 800 V a.c. | 160 A to 250 A | | | | | | SD2-D | 170H0236 and 170H0238 |
| | Blade with bolt holes no lug | 170M7397-B to 170M7399-B | | 160 A to 250 A | | | | | | | |
| 3 | Bladed with lugs | 170M7400 to 170M7402 | 800 V a.c. | 315 A to 400 A | | | | | | SD3-D | 170H0236 and 170H0238 |
| | Blade with bolt holes no lug | 170M7400-B to 170M7402-B | | 315 A to 400 A | | | | | | | |
| 1 | Blade without bolt holes | PV-(amps)ANH1 | 1000 V d.c. | 32 A to 200 A | | | | | | | 170H0236 and 170H238 |
| | Blade with bolt holes | PV-(amps)ANH1-B | | | | | | | | | |
| | Blade with bolt holes and lugs | PV-(amps)ANH1-BL | | | | | | | | | |
| 2 | Blade without bolt holes | PV-(amps)ANH2 | 1000 V d.c. | 160 A to 250 A | | | | | | | 170H0236 and 170H238 |
| | Blade with bolt holes | PV-(amps)ANH2-B | | | | | | | | | |
| | Blade with bolt holes and lugs | PV-(amps)ANH2-BL | | | | | | | | | |
| 3 | Blade without bolt holes | PV-(amps)ANH3 | 1000 V d.c. | 300 A to 400 A | | | | | | | 170H0236 and 170H238 |
| | Blade with bolt holes | PV-(amps)ANH3-B | | | | | | | | | |
| | Blade with bolt holes and lugs | PV-(amps)ANH3-BL | | | | | | | | | |
| Flush end | | | | | | | | | | | |
| 2 | N/A | PV-(amp)AF2 | 1000 V d.c. | 160 A to 250 A | | | | | | | |
| 3 | N/A | PV-(amp)AF3 | | 315 A to 400 A | | | | | | | |
| XL Fuse links | | | | | | | | | | | |
| 01XL | Bladed | PV-(amps)A-01XL | 1000 V d.c. | 63 A to 160 A | | | | | | SD1XL-S-PV | 170H0236 and 170H0238 |
| | Bolted | PV-(amps)A-01XL-B | | | | | | | | | |
| 2 | Bladed | PV-(amps)A-2XL | 1000 V d.c. | 160 A to 355 A | | | | | | SD2XL-S-PV | 170H0236 and 170H0238 |
| | Bolted | PV-(amps)A-2XL-B | | | | | | | | | |
| | | PV-(amps)A-2XL-3B | | | | | | | | | |
| 3 | Bladed | PV-(amps)A-3L | 1000 V d.c. | 350 A to 600 A | | | | | | SD3L-S-PV | 170H0236 and 170H0238 |
| | Bolted | PV-(amps)A-3L-B | | | | | | | | | |
| 01 | Bladed with top indicator | PV-(amps)A-01XL-15 | 1500 V d.c. | 50 A to 125 A | | | | | | SD1XL-S-PV | 170H0236 and 170H0238 |
| | Bolted with side indicator | PV-(amps)A-01XL-B-15 | | | | | | | | | |
| 1 | Bladed with top indicator | PV-(amps)A-1XL-15 | 1500 V d.c. | 100 A to 200 A | | | | | | SD1XL-S-PV | 170H0236 and 170H0238 |
| | Bolted with side indicator | PV-(amps)A-1XL-B-15 | | | | | | | | | |
| 2 | Bladed with top indicator | PV-(amps)A-2XL-15 | 1500 V d.c. | 125 A to 250 A | | | | | | SD2XL-S-PV | 170H0236 and 170H0238 |
| | Bladed without top indicator | PV-(amps)A-2XL-U-15 | | | | | | | | | |
| | Bolted with side indicator | PV-(amps)A-2XL-B-15 | | | | | | | | | |
| | | PV-(amps)A-2XL-3B-15 | | | | | | | | | |
| | Bolted without side indicator | PV-(amps)A-2XL-BU-15 PV-(amps)A-2XL-3BU-15 | | | | | | | | | |
| 3 | Bladed with top indicator | PV-(amps)A-3L-15 | 1500 V d.c. | 250 A to 500 A | | | | | | SD3L-S-PV | 170H0236 and 170H0238 |
| | Bladed without top indicator | PV-(amps)A-3L-U-15 | | | | | | | | | |
| | Bolted with side indicator | PV-(amps)A-3L-B-15 | | | | | | | | | |
| | Bolted without side indicator | PV-(amps)A-3L-BU-15 | | | | | | | | | |

PVM, 10 x 38 mm photovoltaic fuse links, 4 to 30 A, 600 V d.c.

Description

A range of UL 2579 fast-acting 600 V d.c. Midget fuses specifically designed to protect solar power systems in extreme ambient temperature, high cycling and low level fault current conditions (reverse current, multi-array fault).

Catalogue number

PVM-(amp rating)

Technical data

Fuse size: 10 x 38 mm

Rated voltage: 600 V d.c. to UL 2579

Rated current: 4 A to 30 A

Interrupting rating: 50 kA DC



Standard/Approvals

UL Listed 2579, Guide JFGA, File E335324

CSA Component Certified C22.2

Packaging

10

Recommended fuse blocks / fuse holders

Fuse blocks: BMM (data sheet 10241)

Modular fuse holder: CHPV (data sheet 720147)

Fuseclips: 1A3400 Series (data sheet 2131)

In-line fuse holders: HEB (data sheets 2127)



BMM



CHPV



1A3400



HEB


Technical data

| Catalogue number | Rated current (A) | Rated voltage (V d.c.) | Power loss (Watts) | | Compatible fuse blocks | Compatible modular fuse holders | Compatible fuse clips | Compatible in-line fuse holders | |
|------------------|-------------------|------------------------|--------------------|----------------|------------------------|---------------------------------|-----------------------|---------------------------------|-----|
| | | | 0.8 I _n | I _n | | | | | |
| PVM-4 | 4 | 600 (UL) | | | | | | | |
| PVM-5 | 5 | | | | | | | | |
| PVM-6 | 6 | | | | | | | | |
| PVM-7 | 7 | | | | | | | | |
| PVM-8 | 8 | | | | | | | | |
| PVM-9 | 9 | | | | | | | | |
| PVM-10 | 10 | | | 1 | 1.9 | BMM | CHPV | 1A3400 | HEB |
| PVM-12 | 12 | | | | | | | | |
| PVM-15 | 15 | | | 1 | 1.7 | | | | |
| PVM-20 | 20 | | | | | | | | |
| PVM-25 | 25 | | | | | | | | |
| PVM-30 | 30 | | | 1.6 | 2.9 | | | | |


Data sheet: 2153

PVM, 10 x 38 mm photovoltaic fuse links, 4 to 30 A, 600 V d.c.

Dimensions in (mm)

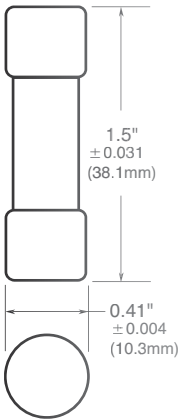

Time current curve

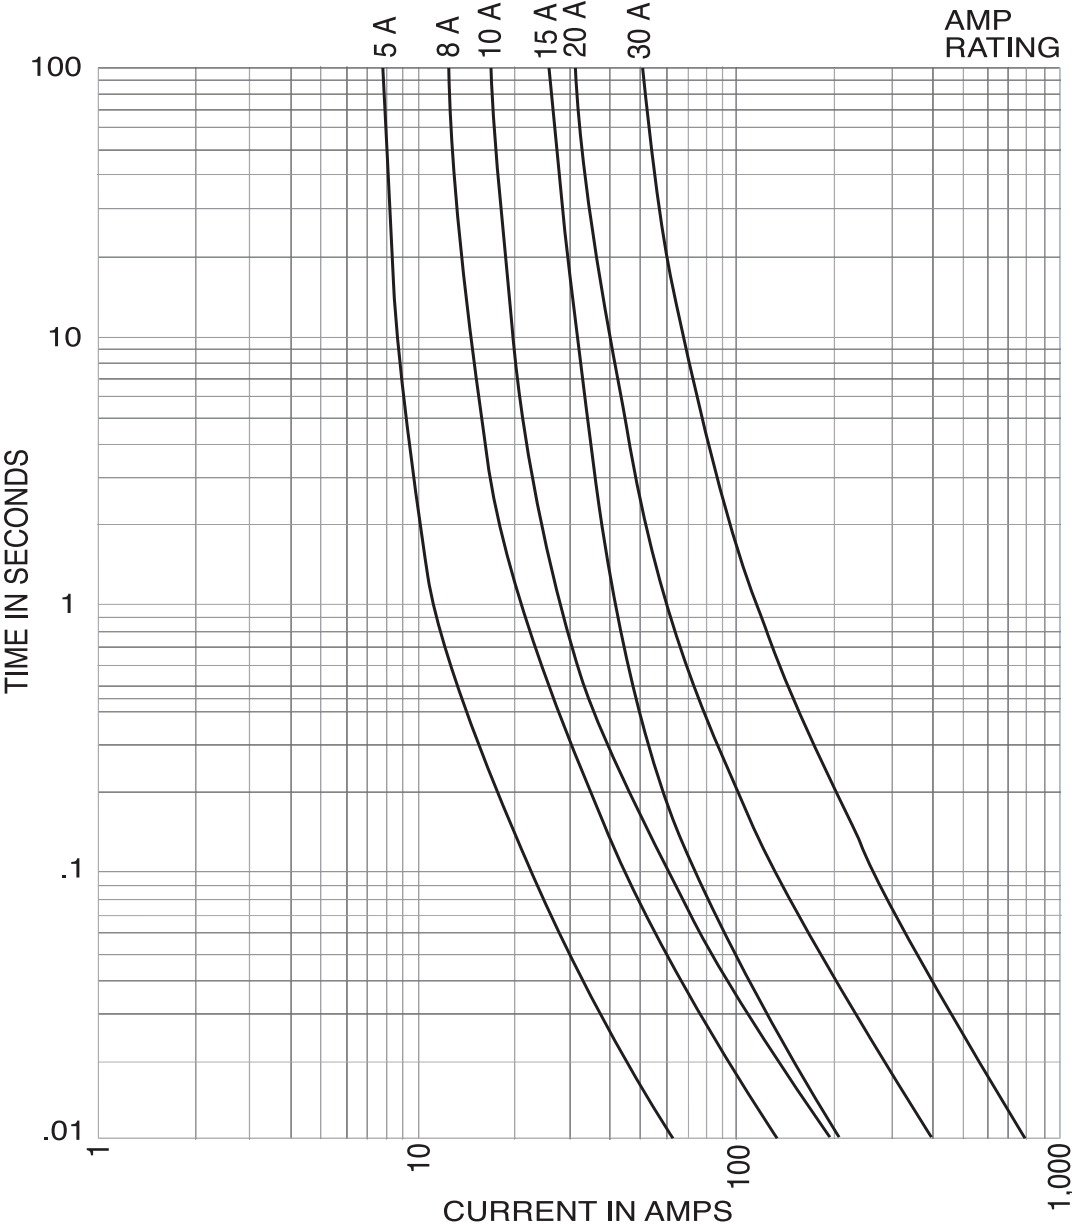

Please contact FUSETECH@eaton.com for further information

Data sheet: 2153

PV-A10, 10 x 38 mm photovoltaic fuse links, 1 to 20 A, 1000 V d.c.

Description

A range of fuse links in a 10 x 38 mm package specifically designed for the protection and isolation of photovoltaic strings. The fuse links are capable of interrupting low overcurrents associated with faulted PV (reverse current, multi-array fault) strings.

Catalogue number

Cylindrical: PV-(amp rating)A10F

Bolt fixing: PV-(amp rating)A10-T

PCB fixing 1 pin: PV-(amp rating)A10-1P

PCB fixing 2 pin: PV-(amp rating)A10-2P

PCB fixing double pin sliver cap: PV-(amp rating)A10-2PS

In-line with crimp terminal: PV-(amp rating)A10F-CT



Technical data

Fuse size: 10 x 38 mm

Rated voltage: 1000 V d.c.

Rated current: 1 A to 20 A

Breaking capacity: 50 kA

Operating class: gPV and UL PV Fuse links

Min interrupting rating: $1.3 \times I_n$ for 1 to 15 A, $1.5 \times I_n$ for 20 A

Time constant: 1 - 3 ms

PV Fuse coordination with thin film cells and 4" 5" and 6" crystalline silicon cells

Standards/Approvals

IEC 60269-6

UL 2579 (File number E335324)

CCC (1 to 15A), RoHS compliant

Packaging

MOQ: 10

Packaging 100% recyclable

Recommended fuse holders and clips

See table

PV-A10, 10 x 38 mm photovoltaic fuse links, 1 to 20 A, 1000 V d.c.

Technical data - Cylindrical, Bolt fixing and In-line with crimp terminal

| Rated voltage | Rated current (Amps) | I ² t (A ² Sec) | | Watts loss (W) | | Catalogue numbers | | |
|----------------------|----------------------|---------------------------------------|----------------------|--------------------|----------------|-------------------|-------------|-----------------------------|
| | | Pre-arcing | Total at 1000 V d.c. | 0.8 I _n | I _n | Cylindrical | Bolt fixing | In-line with crimp terminal |
| 1000 V d.c. (UL/IEC) | 1 | 0.2 | 0.4 | 0.8 | 1.5 | PV-1A10F | PV-1A10-T | PV-1A10F-CT |
| | 2 | 1.2 | 4 | 0.6 | 1.0 | PV-2A10F | PV-2A10-T | PV-2A10F-CT |
| | 2.5 | 3 | 9 | 0.6 | 1.0 | PV-2-5A10F | PV-2-5A10-T | PV-2-5A10F-CT |
| | 3 | 4 | 11 | 0.8 | 1.3 | PV-3A10F | PV-3A10-T | PV-3A10F-CT |
| | 3.5 | 6.6 | 18 | 0.9 | 1.4 | PV-3-5A10F | PV-3-5A10-T | PV-3-5A10F-CT |
| | 4 | 9.5 | 26 | 1.0 | 1.5 | PV-4A10F | PV-4A10-T | PV-4A10F-CT |
| | 5 | 19 | 50 | 1.0 | 1.6 | PV-5A10F | PV-5A10-T | PV-5A10F-CT |
| | 6 | 30 | 90 | 1.1 | 1.8 | PV-6A10F | PV-6A10-T | PV-6A10F-CT |
| | 8 | 3 | 32 | 1.2 | 2.1 | PV-8A10F | PV-8A10-T | PV-8A10F-CT |
| | 10 | 7 | 70 | 1.2 | 2.3 | PV-10A10F | PV-10A10-T | PV-10A10F-CT |
| | 12 | 12 | 120 | 1.5 | 2.7 | PV-12A10F | PV-12A10-T | PV-12A10F-CT |
| | 15 | 15 | 160 | 1.7 | 2.9 | PV-15A10F | PV-15A10-T | PV-15A10F-CT |
| | 16 | 19 | 200 | 1.8 | 3 | PV-16A10F | PV-16A10-T | PV-16A10F-CT |
| | 20 | 34 | 350 | 2.1 | 3.6 | PV-20A10F | PV-20A10-T | PV-20A10F-CT |



Cylindrical



With bolt fixing



In-line with crimp terminal

Technical data - PCB

| Rated voltage | Rated current (Amps) | I ² t (A ² Sec) | | Watts loss (W) | | Catalogue numbers | | |
|----------------------|----------------------|---------------------------------------|----------------------|--------------------|----------------|-----------------------|-----------------------|----------------------------------|
| | | Pre-arcing | Total at 1000 V d.c. | 0.8 I _n | I _n | PCB fixing single pin | PCB fixing double pin | PCB fixing double pin silver cap |
| 1000 V d.c. (UL/IEC) | 1 | 0.2 | 0.4 | 0.8 | 1.5 | PV-1A10-1P | PV-1A10-2P | PV-1A10-2P-S |
| | 2 | 1.2 | 4 | 0.6 | 1.0 | PV-2A10-1P | PV-2A10-2P | PV-2A10-2P-S |
| | 2.5 | 3 | 9 | 0.6 | 1.0 | PV-2-5A10-1P | PV-2-5A10-2P | PV-2-5A10-2P-S |
| | 3 | 4 | 11 | 0.8 | 1.3 | PV-3A10-1P | PV-3A10-2P | PV-3A10-2P-S |
| | 3.5 | 6.6 | 18 | 0.9 | 1.4 | PV-3-5A10-1P | PV-3-5A10-2P | PV-3-5A10-2P-S |
| | 4 | 9.5 | 26 | 1.0 | 1.5 | PV-4A10-1P | PV-4A10-2P | PV-4A10-2P-S |
| | 5 | 19 | 50 | 1.0 | 1.6 | PV-5A10-1P | PV-5A10-2P | PV-5A10-2P-S |
| | 6 | 30 | 90 | 1.1 | 1.8 | PV-6A10-1P | PV-6A10-2P | PV-6A10-2P-S |
| | 8 | 3 | 32 | 1.2 | 2.1 | PV-8A10-1P | PV-8A10-2P | PV-8A10-2P-S |
| | 10 | 7 | 70 | 1.2 | 2.3 | PV-10A10-1P | PV-10A10-2P | PV-10A10-2P-S |
| | 12 | 12 | 120 | 1.5 | 2.7 | PV-12A10-1P | PV-12A10-2P | PV-12A10-2P-S |
| | 15 | 15 | 160 | 1.7 | 2.9 | PV-15A10-1P | PV-15A10-2P | PV-15A10-2P-S |
| | 16 | 19 | 200 | 1.8 | 3 | PV-16A10-1P | PV-16A10-2P | PV-16A10-2P-S |
| | 20 | 34 | 350 | 2.1 | 3.6 | PV-20A10-1P | PV-20A10-2P | PV-20A10-2P-S |



PCB 1 Pin



PCB 2 Pin


PV-A10, 10 x 38 mm photovoltaic fuse links, 1 to 20 A, 1000 V d.c.

Compatible fuse holders and clips


| Rated voltage | Fuse type | Compatible in-line holders | Compatible modular fuse holders | Compatible fuse clips | |
|---------------|-------------|----------------------------|---------------------------------|-----------------------|--------|
| 1000 V d.c. | Cylindrical | PV-1A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-2A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-2-5A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-3A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-3-5A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-4A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-5A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-6A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-8A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-10A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-12A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-15A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-16A10F | HPV-DV-** | CHPV | 1A3400 |
| | | PV-20A10F | HPV-DV-** | CHPV | 1A3400 |

Please note no fuse holders and/or clips are compatible with the Bolt fixing, in-line crimp terminal and PCB fixings versions


Dimensions (mm) Cylindrical PV-**A10F

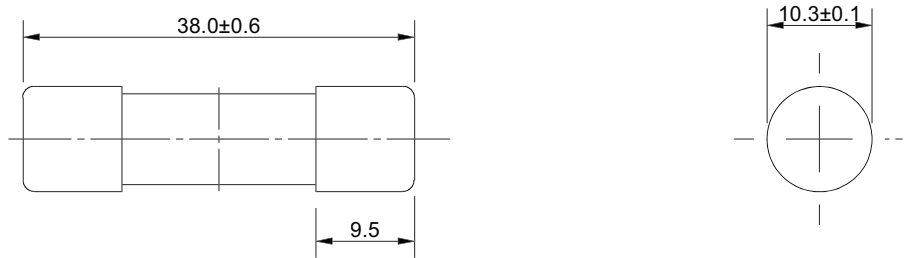

Dimensions (mm) PCB fixing PV-**A10-xP

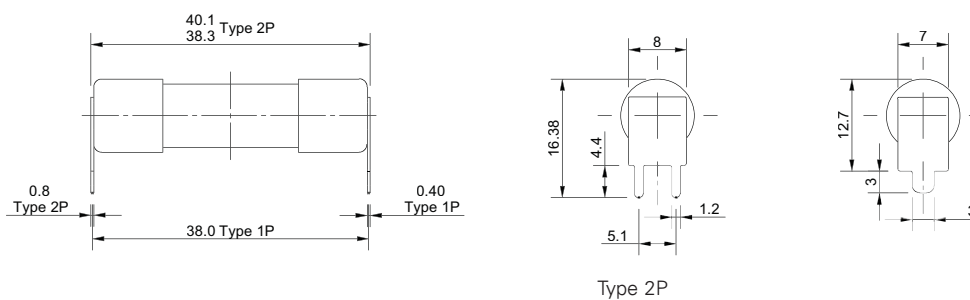


Dimensions (mm) Bolt fixing PV-**A10-T

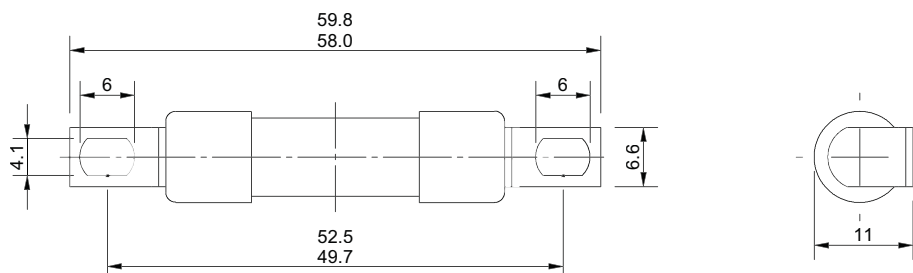

PV-A10, 10 x 38 mm photovoltaic fuse links, 1 to 20 A, 1000 V d.c.

Dimensions (mm) In-line with crimp terminal PV-**A10F-CT

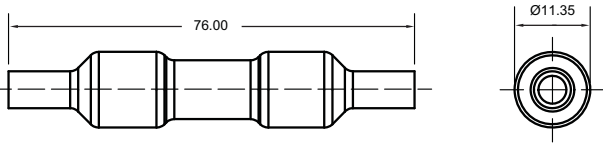

The in-line crimp terminal version can be electrically insulated with customer supplied overmolding or approved heat-shrink.

Operating temperature range

- -40°C to 90°C

Wire range and type

- Single conductor, 12-10AWG 75°C/90°C Cu stranded PV

Overmolding temperature parameters

- 233°C for 180 sec Max


Terminals

- Crimp terminal for 12-10AWG PV copper conductors

Recommended tools


- Sta-Kon® terminal crimping tool, catalog number ERG4002

Time current curve

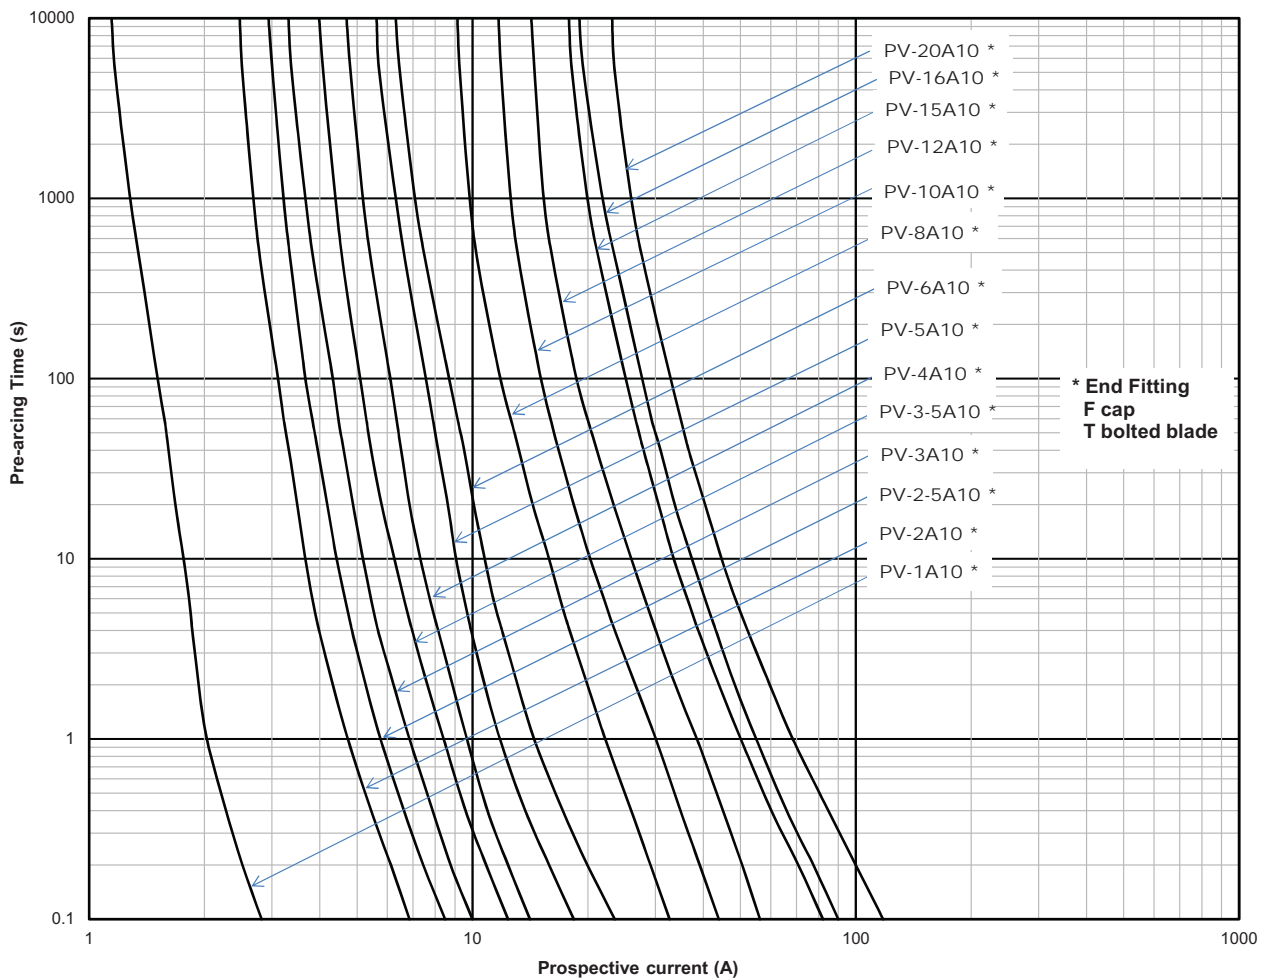

PV-A10, 10 x 38 mm photovoltaic fuse links, 1 to 20 A, 1000 V d.c.

Temperature derating

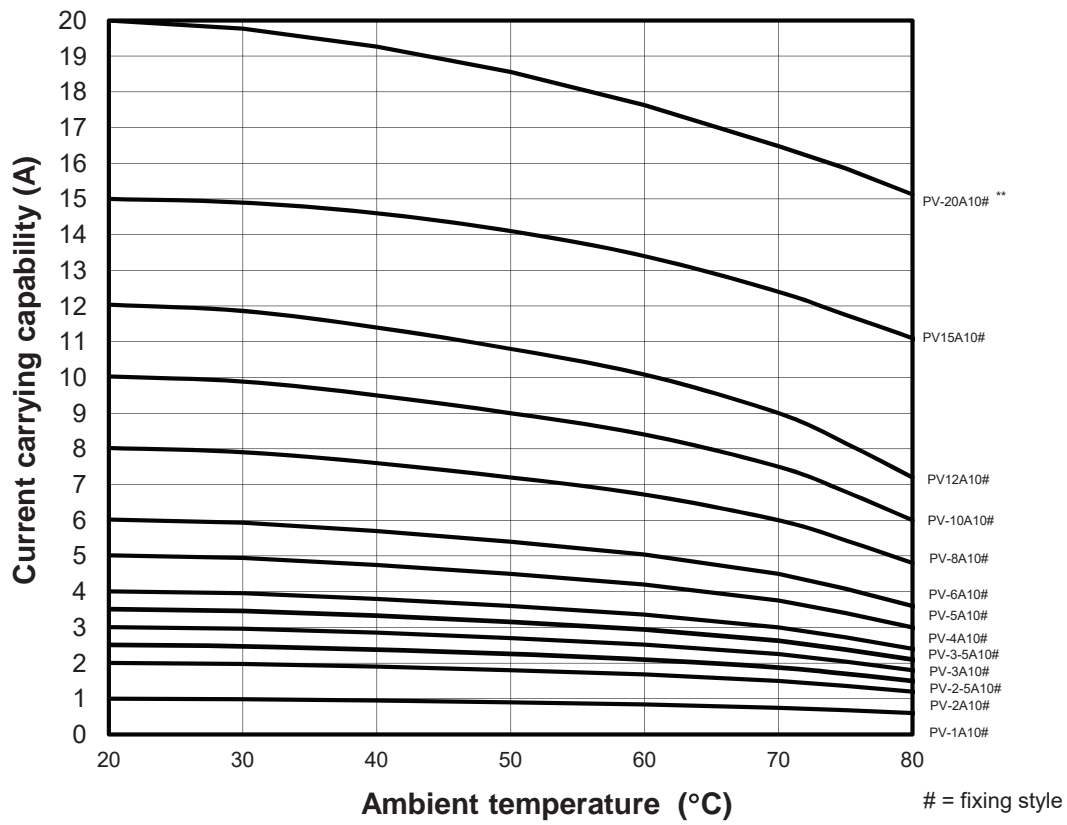

Data sheet: 720110

Data sheet: 720110

CHPV, Modular fuse holders 32A (IEC), 30 A (UL), 1000 V d.c.

Description

Compact DIN-Rail mounting fuse holders specifically designed for 10 x 38 mm cylindrical photovoltaic fuse links.

Catalogue numbers

CHPV1U 1-pole modular fuse holder

CHPV2U 2-pole modular fuse holder

CHPV11U 1-pole modular fuse holder with neon indicator

CHPV21U 2-pole modular fuse holder with neon indicator




Technical data

| IEC | | UL | | Terminal rating | Rated breaking withstand capacity | Compatible Busmann series fuse links |
|---------------|---------------|---------------|---------------|--|-----------------------------------|--|
| Rated voltage | Rated current | Rated voltage | Rated current | | | |
| 1000 V d.c. | 32 A | 1000 V d.c. | 30 A | IEC 1 to 25 mm ² 70°C PVC Copper cable (solid stranded or fine stranded) Spade lug Comb bus bar | 33 kA rms sym | Solar PV range: PVM, PV-A10F Cylindrical |

Standards / Agency information

| IEC | UL | CSA | CCC | CE |
|-------------|--|-------------------------------------|------------|---------|
| IEC 60269-1 | UL 4248-1 UL4248-19 UL file E14853 | C22.2 No 4248.1 C22.2 No 4248.19 | GB 13539.1 | DCB 272 |

Dimensions mm (in)

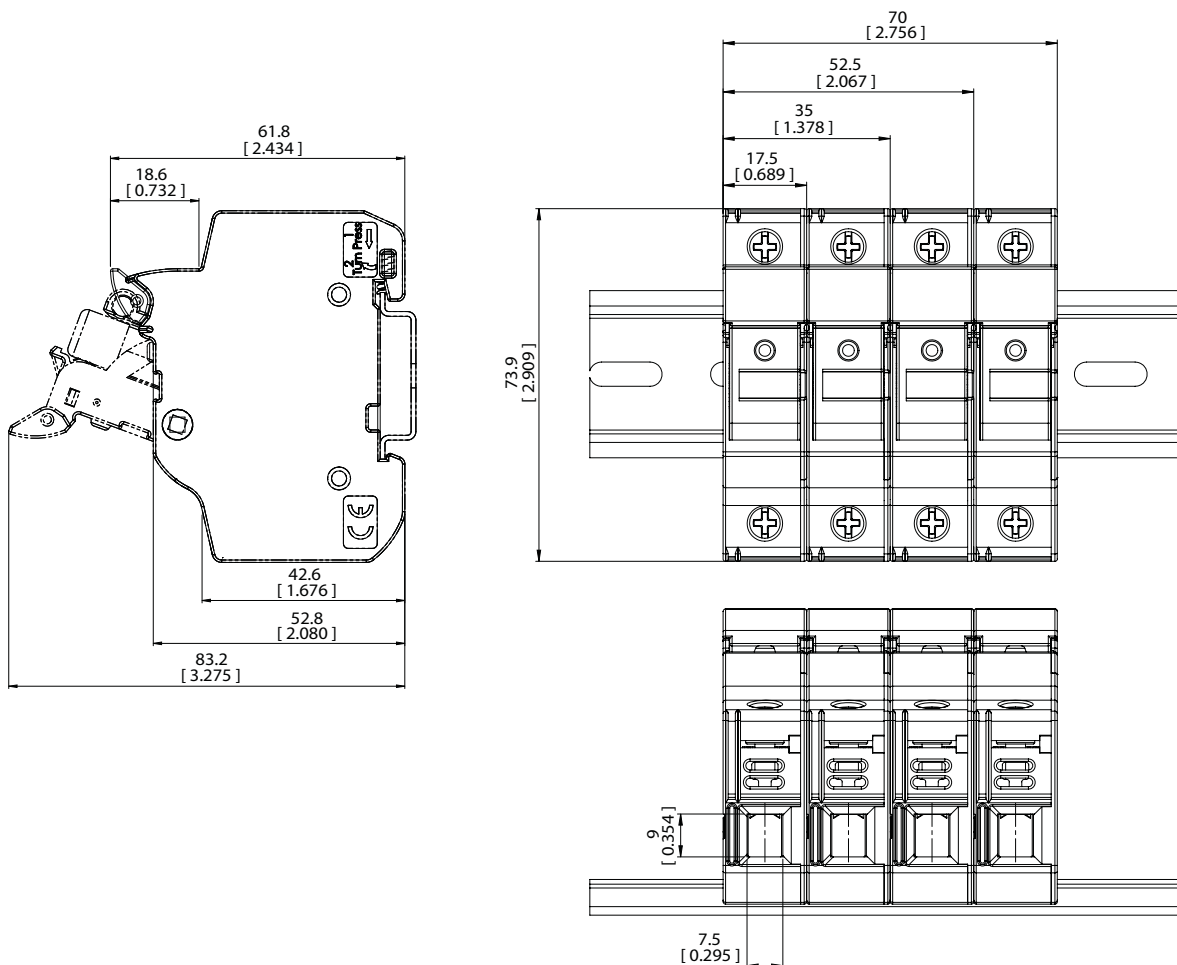

PV-A10F85L, 10 x 85 mm photovoltaic fuse links, 2.25 to 30 A, 1500 V d.c.

Description

A range of fuse links in a 10 x 85 mm package specifically designed for the protection and isolation of photovoltaic strings.

Catalogue number

PV-(amp rating)A10F85L

Technical data

Fuse size: 10 x 85 mm

Rated voltage: 1500 V d.c.

Rated current: 2.25 A to 30 A

Breaking capacity: 30 kA at 1 ms

Operating class: gPV

Standards/Approvals

IEC 60269-6

UL 248-19

RoHS compliant

Packaging

MOQ: 10

Packaging 100% recyclable

Recommended fuse holder


CHPV15H85 (see page 25)



Technical data


| Rated voltage | Rated current (Amps) | I^2t (A ² Sec) | | Watts loss (W) | | Catalogue numbers | Compatible fuse holder |
|----------------------|----------------------|-----------------------------|----------------------|----------------|-------|-------------------|------------------------|
| | | Pre-arcing | Total at 1500 V d.c. | 0.8 I_n | I_n | | |
| 1500 V d.c. (IEC/UL) | 2.25 | 3 | 10 | 1.4 | 2.4 | PV-2-25A10F85L | CHPV15H85 |
| | 2.5 | 4 | 10 | 1.3 | 2.1 | PV-2.5A10F85L | CHPV15H85 |
| | 3 | 7 | 20 | 1.3 | 2.2 | PV-3A10F85L | CHPV15H85 |
| | 3.5 | 10 | 20 | 1.6 | 2.6 | PV-3.5A10F85L | CHPV15H85 |
| | 4 | 15 | 30 | 1.7 | 2.8 | PV-4A10F85L | CHPV15H85 |
| | 5 | 33 | 60 | 1.7 | 2.8 | PV-5A10F85L | CHPV15H85 |
| | 12 | 19 | 240 | 2.1 | 3.5 | PV-12A10F85L | CHPV15H85 |
| | 15 | 42 | 300 | 2.2 | 3.6 | PV-15A10F85L | CHPV15H85 |
| | 16 | 48 | 350 | 2.1 | 3.5 | PV-16A10F85L | CHPV15H85 |
| | 20 | 108 | 800 | 2.7 | 4.5 | PV-20A10F85L | CHPV15H85 |
| | 25 | 190 | 1400 | 3.4 | 5.6 | PV-25A10F85L | CHPV15H85 |
| | 30 | 485 | 3500 | 4 | 6.6 | PV-30A10F85L | CHPV15H85 |

Dimensions (mm)

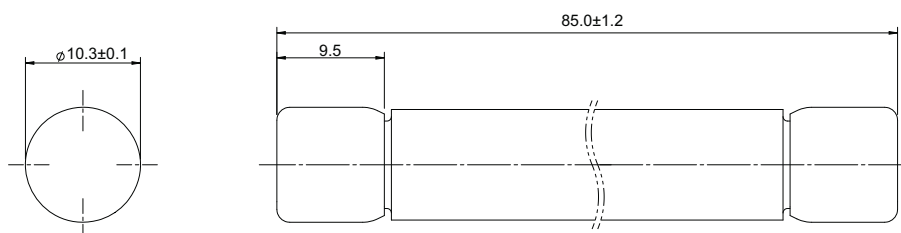


PV-A10F85L, 10 x 85 mm photovoltaic fuse links, 2.25 to 30 A, 1500 V d.c.

Time current curve

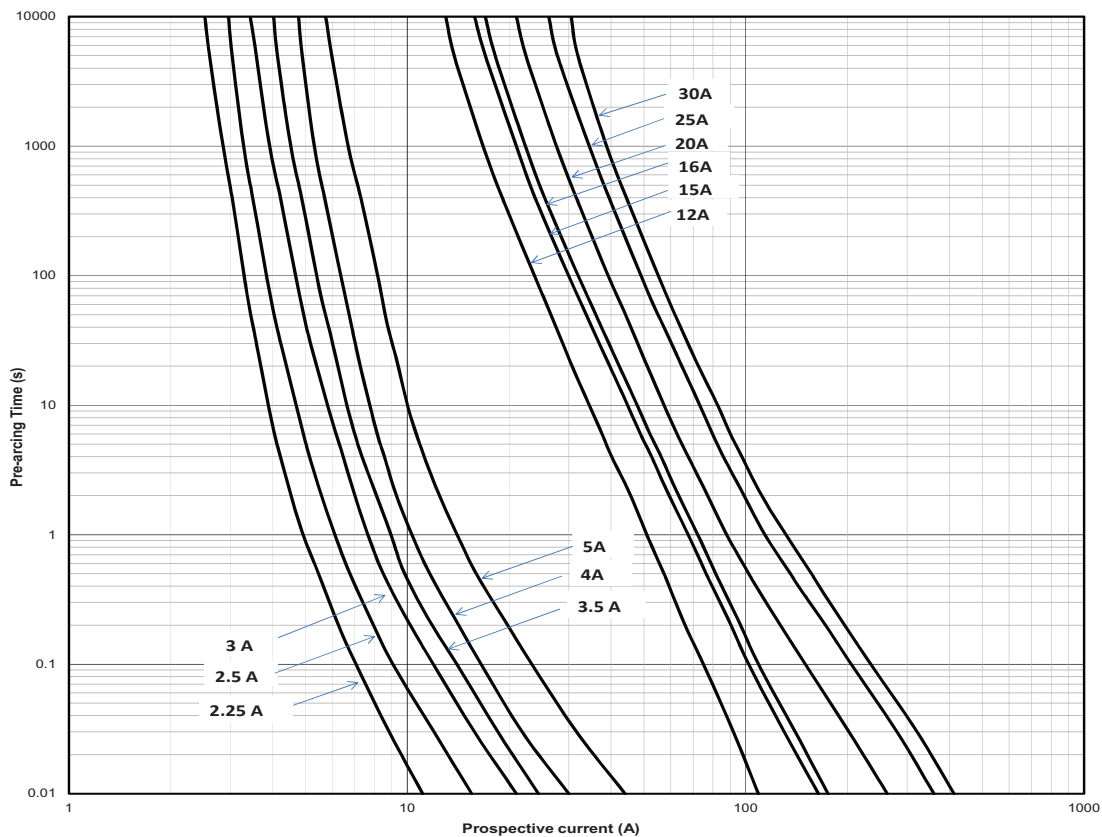

Temperature derating curve

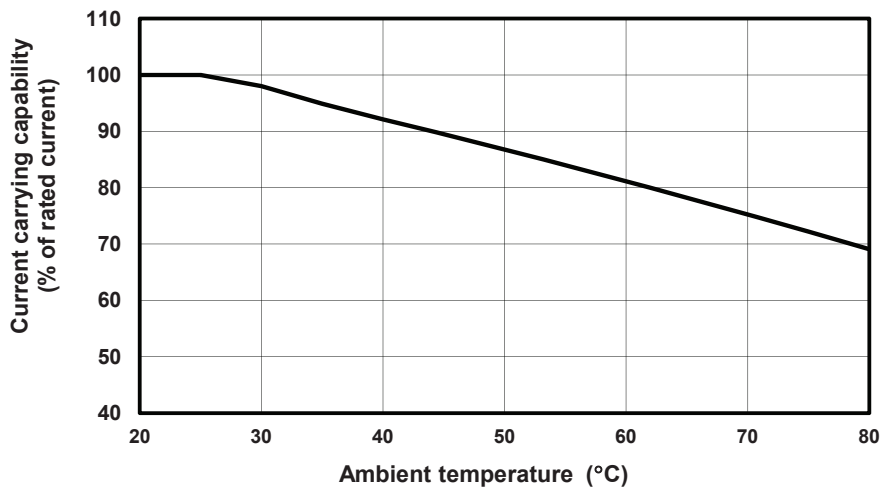

Note: Temperature derating curve generated using the CHPV15H85 fuse holder

CHPV15H85, photovoltaic fuse holder, 32 A (IEC/UL) 1500 V d.c.

Description

Eaton's Bussmann series 10 x 85 mm fuse holders are suitable for use with 10 x 85 mm and 14 x 85 mm cylindrical gPV fuse links. The unique design offers high degree of safety. There is no possibility of any accidental contact with live parts during replacement of the fuse links. When the fuse carrier is extracted, a spring loaded cover moves out covering the live parts hence protecting against accidental damage.

Catalogue number

CHPV15H85

Technical data

Rated voltage: 1500 V d.c.

Rated current: 32 A

Breaking capacity: 50 kA

Operating class: gPV

Standards/Approvals

IEC 60269-1

IEC 60269-6

UL 4248 Edition 1 (File number 348242)

UL 4248-19 Edition 1

Packaging

MOQ: 10


Compatible fuse links

10 x 85 mm fuse links: PV-A10F85L (see page 23)

14 x 85 mm fuse links: PV-A14LF (see page 30)



Dimensions (mm)

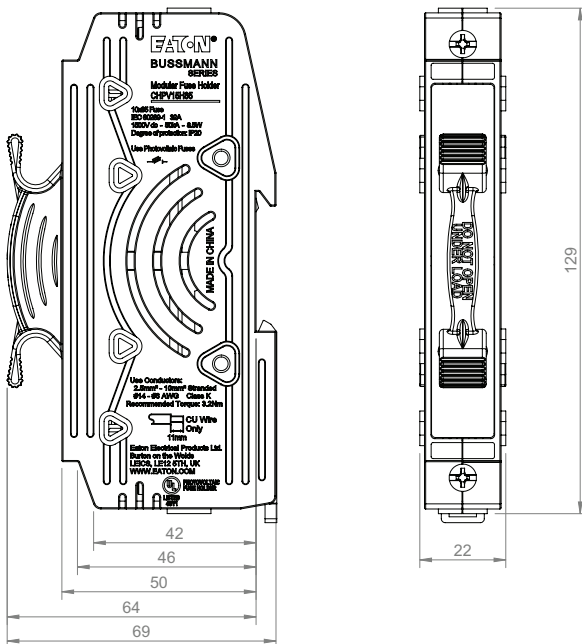

PV-14AF, 14 x 51 mm photovoltaic fuse links, 15 to 32 A, 1000/1100 V d.c.

Description

A range of 14 x 51 mm fuse links specifically designed for protecting and isolating photovoltaic strings. These fuse links are capable of interrupting low overcurrents associated with faulted PV systems (reverse current, multi-array fault).

Catalogue number

PV-(amp rating)A14F

Technical data

Fuse size: 14 x 51 mm

Rated voltage:

- 1100 V d.c. (IEC and UL for 15 A and 20 A)
- 1000 V d.c. (IEC and UL for 25 and 32 A)

Rated current: 15, 20, 25 and 32 A

Breaking capacity: 30 kA

Operating class: gPV and UL PV Fuse links



Standards / Approvals

IEC 60269-6

UL 2579 (File number E335324)

RoHS compliant

Packaging

MOQ: 10

Packaging 100% recyclable.

Recommended modular fuse holders

- Without indicator: CHPV141U
- With indicator: CHPV141IU

See page 28


Recommended modular fuse clips

FW14-PCB

Catalogue numbers

| Catalogue number | Rated current (Amps) | Rated voltage (V d.c.) | Energy integrals I ² t (A ² s) | | Watts loss | | Compatible modular fuse holder | | |
|------------------|----------------------|------------------------|--|------------------------|-------------------|----------------|--------------------------------|----------------|----------------------|
| | | | Pre-arcing | Total at rated voltage | 08 I _n | I _n | Without indicator | With indicator | Compatible fuse clip |
| PV-15A14F | 15 | 1100 | 14 | 265 | 2.1 | 4 | CHPV141U | CHPV141IU | FW14-PCB |
| PV-20A14F | 20 | 1100 | 27 | 568 | 2.7 | 5 | CHPV141U | CHPV141IU | FW14-PCB |
| PV-25A14F | 25 | 1000 | 65 | 943 | 2.7 | 5.1 | CHPV141U | CHPV141IU | FW14-PCB |
| PV-32A14F | 32 | 1000 | 120 | 1740 | 3.3 | 6.2 | CHPV141U | CHPV141IU | FEW14-PCB |


Dimensions (mm)

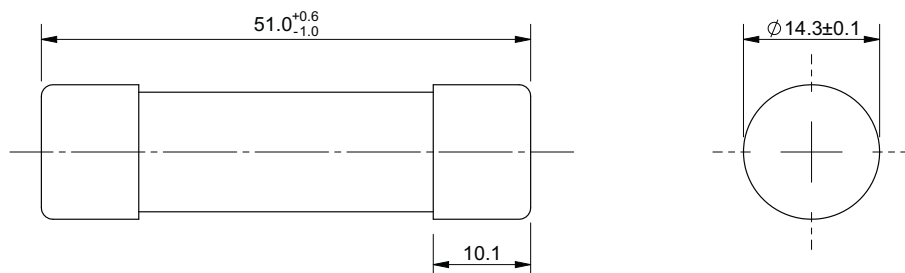

Data sheet: 720132

PV-14AF, 14 x 51 mm photovoltaic fuse links, 15 to 32 A, 1000/1100 V d.c.

Time current curve

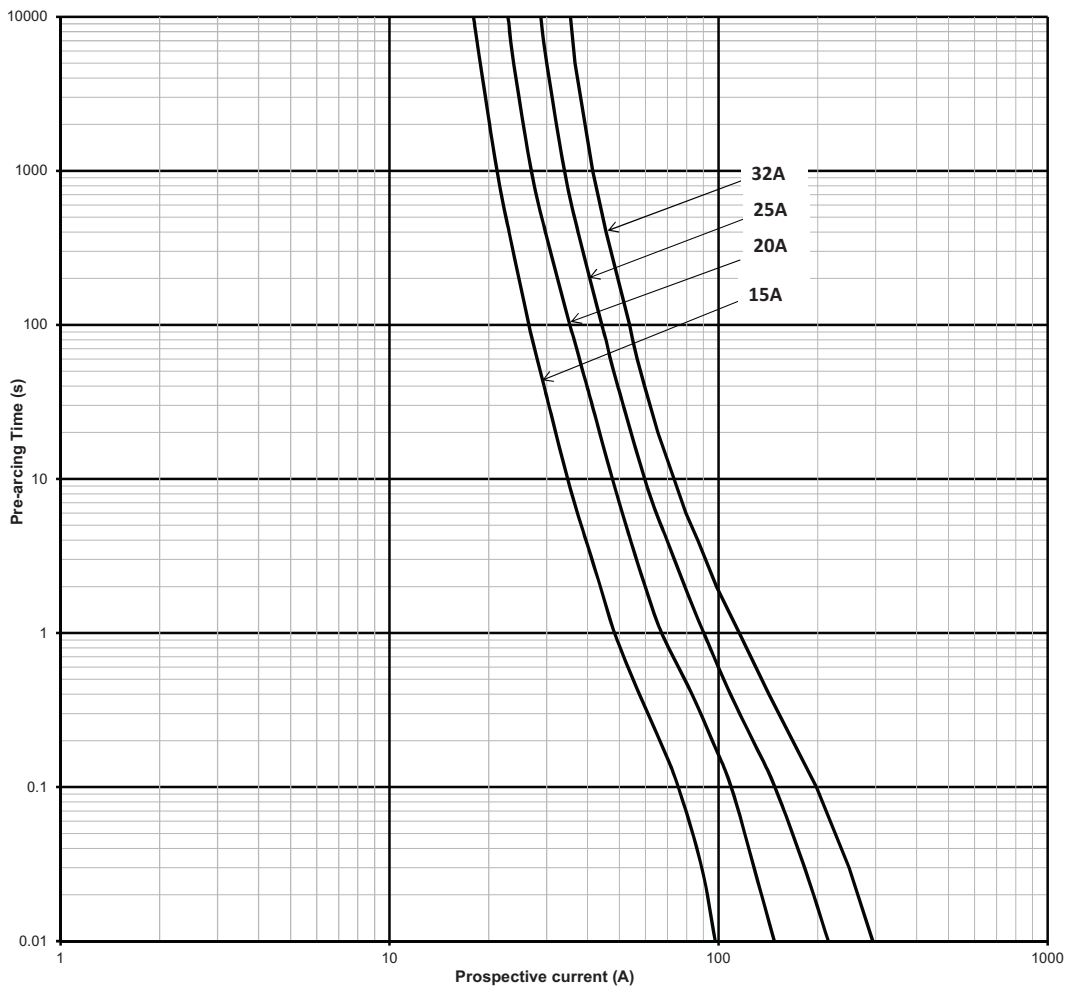

CHPV14, 14 x 51 mm modular fuse holders, 50 A, 1500 V d.c.

Description

Compact DIN-Rail mounting fuse holders specifically designed for 14 x 51 mm photovoltaic fuse links.



Catalogue number

CHPV141U 1-pole without indicator

CHPV142 2-pole without indicator

CHPV141IU 1-pole with indicator

CHPV142IU 2-pole with indicator

Technical data

| IEC | | UL | | Agency markings | Terminal rating | Rated breaking withstand capacity | Compatible Busmann series fuse links |
|---------------|---------------|----------------------|---------------|--|---|-----------------------------------|--------------------------------------|
| Rated voltage | Rated current | Rated voltage | Rated current | | | | |
| 1500 V d.c. | 1500 V d.c. | 50 A (a.c. and d.c.) | 50 A | IEC 60269-1 and 2 UL Listed file number E348242 | Cable size: 1.5-50 mm ² Recommended torque setting: 3.5 Nm Maximum torque setting: 3.5 Nm Mounting 35 mm DIN-Rail or 2 x M4 panel mounting screws | 10 kA d.c. | PV-A14F |

Standards / Approvals

IEC 60269-1 and 2

UL Listed number E348242

Packaging



MOQ: 10

Packaging 100% recyclable

Accessories

| Catalogue numbers | Description | Unit packing |
|-------------------|---|--------------|
| JV-L | Multi-pole connector kit. One kit will gang up to 4-poles together | 12 |
| CH14-CTP | IP20 Protection accessory, provides IP20 protection to terminals with 10mm ² or less cable | 12 |

Dimensions - mm

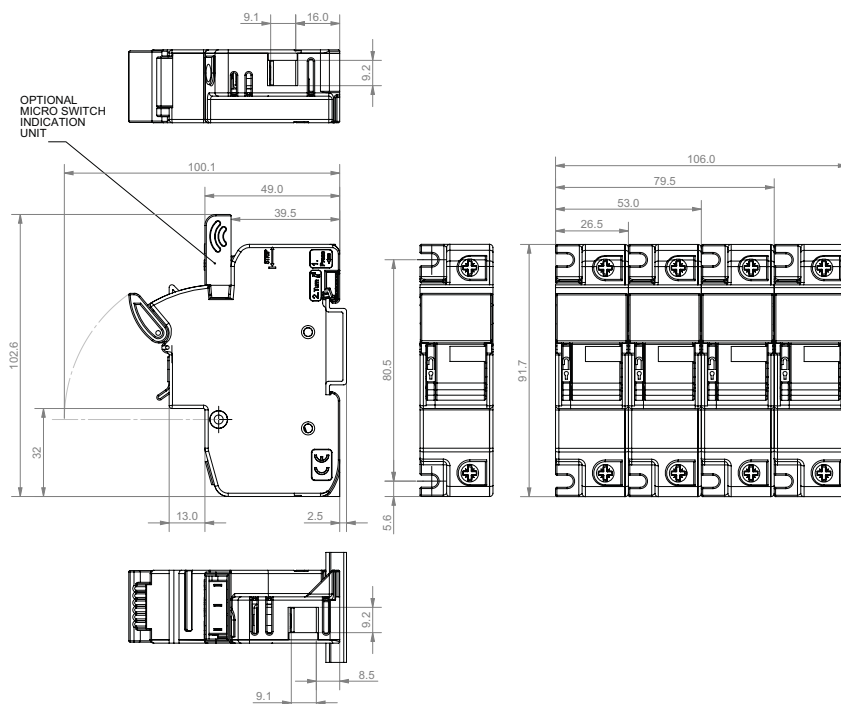

Data sheet: 10080

FW14-PCB, Mountable fuse clips

Description

Compatible with our 14 x 51 mm PV-(amps)A14F fuse links

Please note deratings apply to fuse links with watts loss greater than 6 Watts, contact bulehighspeedtechnical@eaton for application assistance.

Catalogue number

FW14-PCB

Technical data

Maximum rated power acceptance: 6 Watts

Material: Copper Alloy CuSn


Tin plated

Weight: 5 grams each

Standard: IEC 60269-1

Pack quantity: 500

Dimensions - mm

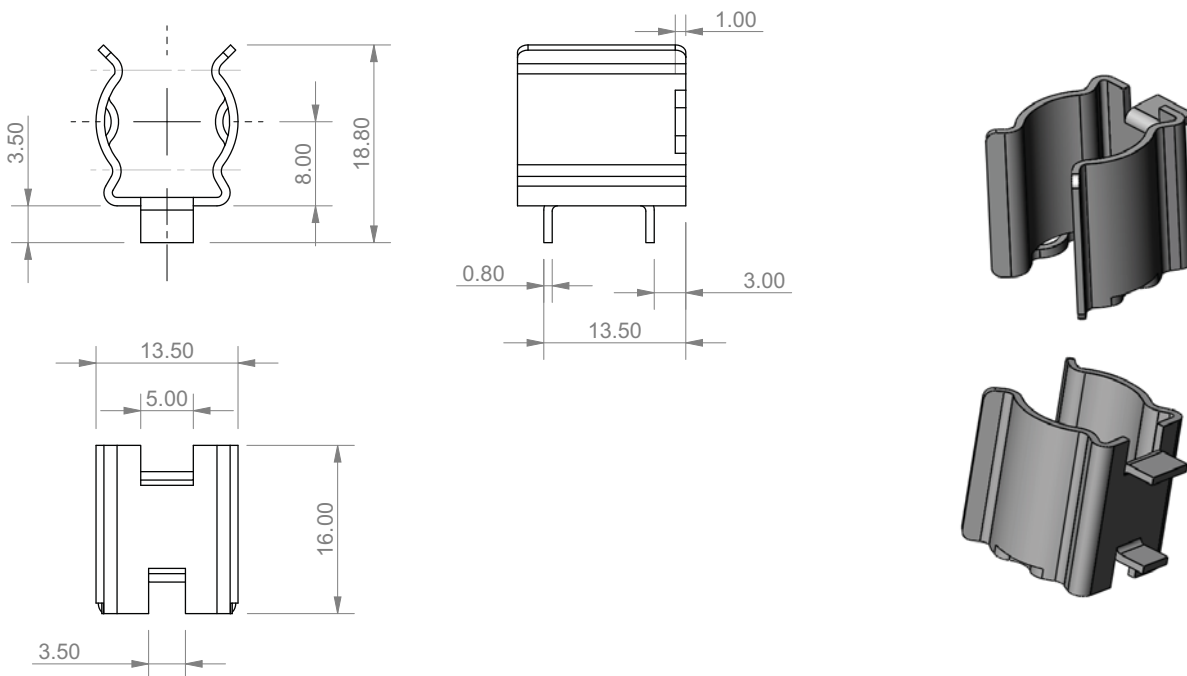

Note : Appropriate creepage and clearances distances between clips should be maintained when mounting on the PCB.

PV-A14L, 14 x 65 mm photovoltaic fuse links, 3.5 to 32 A, 1300/1500 V d.c.

Description

A range of 14 x 65mm fuse links specifically designed for protecting and isolating photovoltaic strings. These fuse links are capable of interrupting low overcurrents associated with faulted PV systems (reverse current, multi-array fault).



Catalogue number

Cylindrical: PV-(amp rating)A14LF

Cylindrical with tags: PV-(amp rating)A14L-T

Cylindrical with 10mm fixings: PV-(amp rating)A14LF10F

Technical data

Fuse size: 14 x 65 mm

Rated current:

- 1500 V d.c. (IEC and UL, 2.25 A to 20 A)
- 1300 V d.c. (IEC and UL, 25 A and 32 A)

Rated current: 2.25 A to 32 A

Rated breaking capacity: 10 kA

Operating class: gPV and UL PV Fuse links

Minimum interrupting rating: 2 x I_n

PV Fuse coordination w/ Thin film cells 4", 5" and 6" crystalline

Time constant: 1-3 ms

Standards / Approvals

IEC 60269-6, UL 2579

(File number E335324)

RoHS compliant

Packaging

MOQ: 10

Packaging 100% recyclable.

Recommended fuse holders and clips

See table page 31

Technical data


| Rated voltage | Rated current (Amps) | I ² t (A ² Sec) | | Watts loss (W) | | Catalogue numbers | | |
|-------------------------|----------------------|---------------------------------------|------------------------|--------------------|----------------|-------------------|-----------------------|-------------------------------|
| | | Pre-arcing | Total at rated voltage | 0.8 I _n | I _n | Cylindrical | Cylindrical with tags | Cylindrical with 10mm fixings |
| 1500 V d.c. (IEC/UL) | 2.25 | 4 | 8 | 1.4 | 2.3 | PV-2.25A14LF | N/A | PV-2.25A14LF10F |
| | 2.5 | 5 | 10 | 1.5 | 2.5 | PV-2.5A14LF | PV-2.5A14L-T | PV-2.5A14LF10F |
| | 3 | 8 | 14 | 1.7 | 2.8 | PV-3A14LF | PV-3A14L-T | PV-3A14LF10F |
| | 3.5 | 12 | 23 | 1.8 | 3.0 | N/A | N/A | PV-3.5A14LF10F |
| | 4 | 18 | 34 | 2 | 3.3 | PV-4A14LF | PV-4A14L-T | PV-4A14LF10F |
| | 15 | 16 | 190 | 2.9 | 5.1 | PV-15A14LF | PV-15A14L-T | PV-15A14LF10F |
| | 20 | 34 | 400 | 3.8 | 6.9 | PV-20A14LF | PV-20A14L-T | PV-20A14LF10F |
| 1300 V d.c. (IEC/UL) | 25 | 65 | 550 | 4.1 | 7.5 | PV-25A14LF | PV-25A14L-T | PV-25A14LF10F |
| | 32 | 105 | 900 | 5.7 | 10.4 | PV-32A14LF | PV-32A14L-T | PV-32A14LF10F |

PV-A14L, 14 x 65 mm photovoltaic fuse links, 3.5 to 32 A, 1300/1500 V d.c.


Compatible fuse holders and fuse clips

| Rated voltage | Fuse type | Catalogue numbers | Compatible fuse holders | Compatible fuse clips | |
|---------------|--------------------------------|-------------------|-------------------------|-----------------------|---------------------|
| 1500 V d.c. | Cylindrical | PV-2.25A14LF | | 5592-01 | |
| | | PV-2.5A14LF | | 5592-01 | |
| | | PV-3A14LF | | 5592-01 | |
| | | PV-4A14LF | | 5592-01 | |
| | | PV-15A14LF | | 5592-01 | |
| | | PV-20A14LF | | 5592-01 | |
| 1300 V d.c. | | PV-25A14LF | | 5592-01 | |
| | | PV-32A14LF | | 5592-01 | |
| 1500 V d.c. | Cylindrical with tags | PV-2.5A14L-T | | | |
| | | PV-3A14L-T | | | |
| | | PV-4A14L-T | | | |
| | | PV-15A14L-T | | | |
| | | PV-20A14L-T | | | |
| | | PV-25A14L-T | | | |
| 1300 V d.c. | | PV-32A14L-T | | | |
| | | | | | |
| 1500 V d.c. | Cylindrical with 10 mm fixings | PV-2.25A14LF10F | CHPV15H85 | | 5960-07 and 5960-09 |
| | | PV-2.5A14LF10F | CHPV15H85 | | 5960-07 and 5960-09 |
| | | PV-3A14LF10F | CHPV15H85 | | 5960-07 and 5960-09 |
| | | PV-3.5A14LF10F | CHPV15H85 | | 5960-07 and 5960-09 |
| | | PV-4A14LF10F | CHPV15H85 | 5960-07 and 5960-09 | |
| | | PV-15A14LF10F | CHPV15H85 | 5960-07 and 5960-09 | |
| | | PV-20A14LF10F | CHPV15H85 | 5960-07 and 5960-09 | |
| | | PV-25A14LF10F | CHPV15H85 | 5960-07 and 5960-09 | |
| 1300 V d.c. | | PV-32A14LF10F | CHPV15H85 | 5960-07 and 5960-09 | |

Dimensions (mm) Cylindrical PV-*A14LF

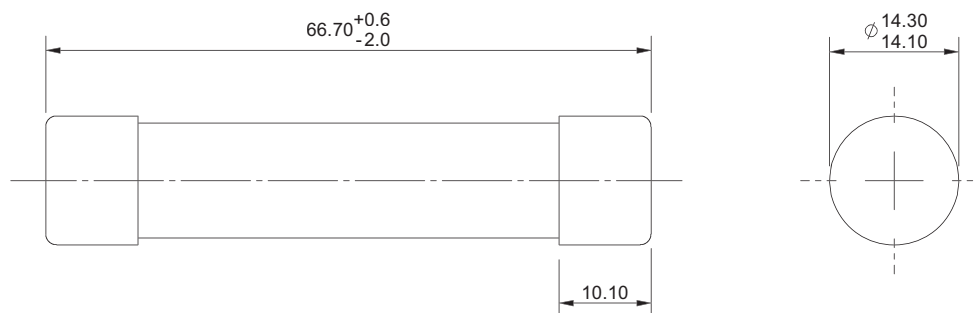


Dimensions (mm) Cylindrical with 10 mm Fixings PV-*A14LF10F

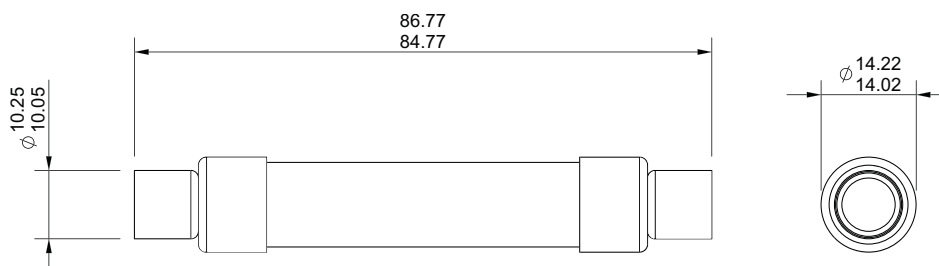


PV-A14L, 14 x 65 mm photovoltaic fuse links, 3.5 to 32 A, 1300/1500 V d.c.

Dimensions (mm) Cylindrical with tags PV-*A14L-T

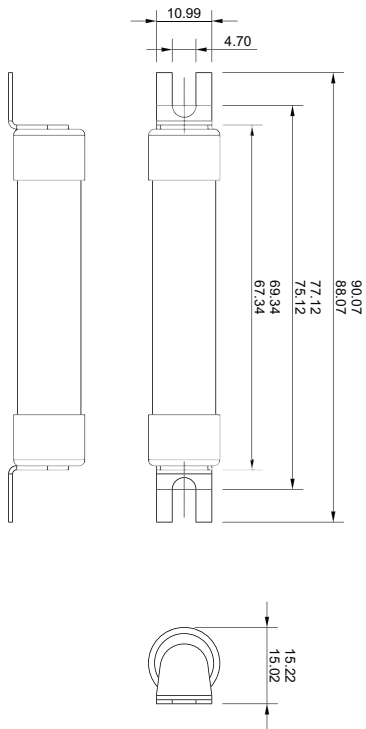


Time-current curve 2.25 A to 4 A

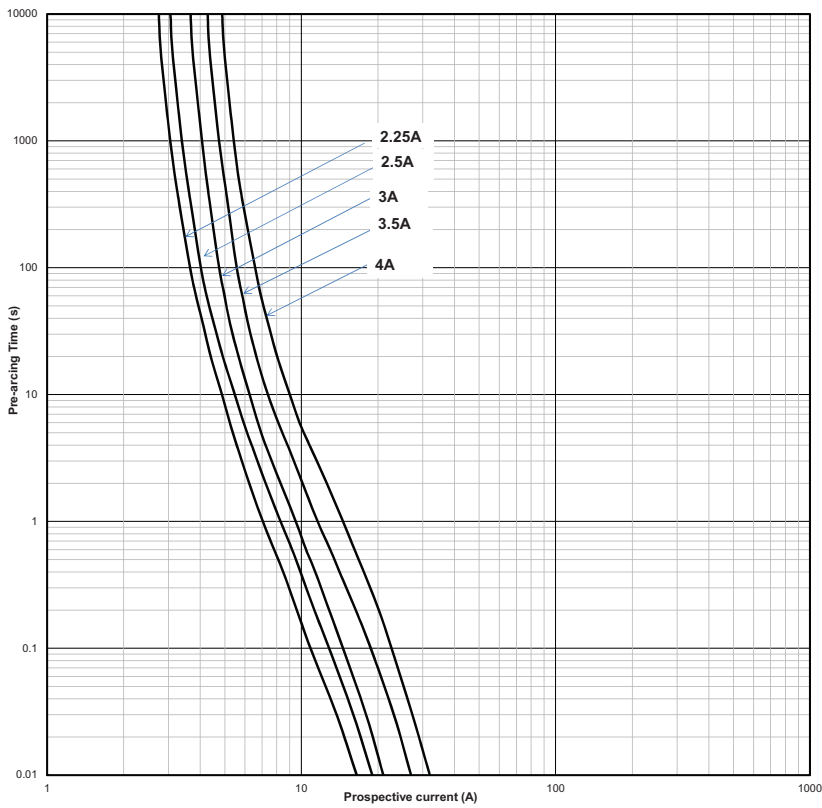

PV-A14L, 14 x 65 mm photovoltaic fuse links, 3.5 A to 32 A, 1300/1500 V d.c.

Time-current curve 15 A to 32 A

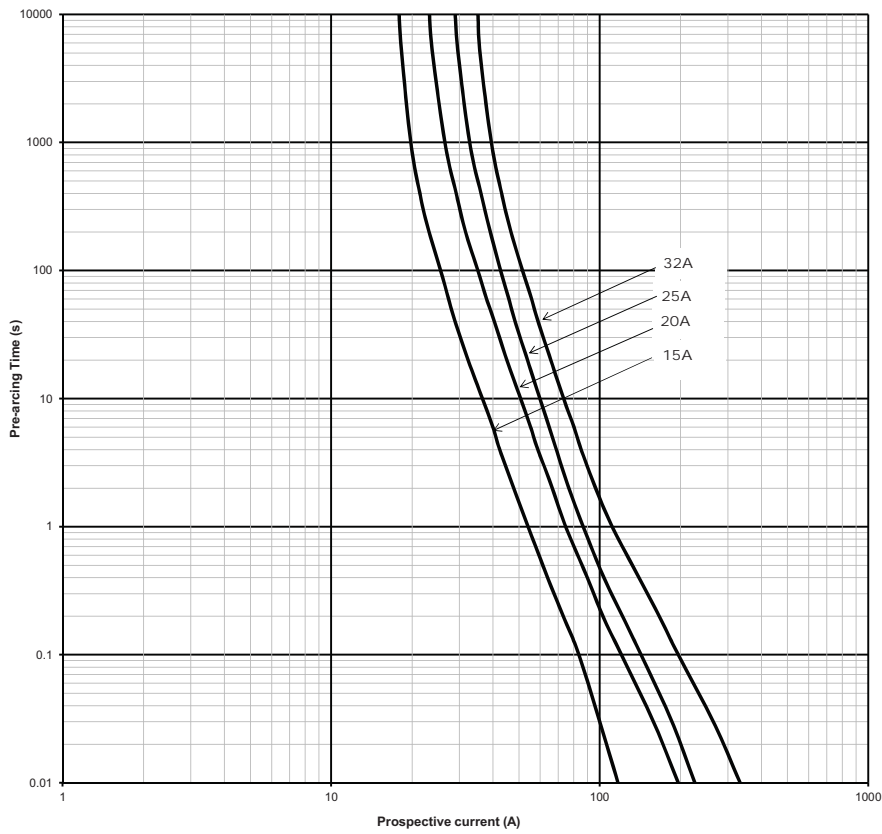

PV-ANH, NH Photovoltaic fuse links, 32 to 400 A, 1000 V d.c.

Description

A range of NH size fuse links specifically designed for protecting and isolating photovoltaic array combiners and DC disconnects. These fuse links are capable of interrupting low overcurrents associated with faulted PV systems (reverse current, multi-array fault).

Catalogue number

PV-(amp rating)ANH(size)

Technical data

Rated voltage: 1000 V d.c.

Rated current: 32 A to 400 A

Breaking capacity: 50 kA

Operating class: gPV and UL PV fuse links

Standards / Approvals

IEC 60269-6

UL 2579 (File number E335324)

CSA Listed

RoHS compliant

Packaging

MOQ: 3

Packaging 100% recyclable

Recommended microswitches and fuse bases

See table page 35



Microswitch



NH Bases



PV-ANH, NH Photovoltaic fuse links, 32 to 400 A, 1000 V d.c.

Technical data


| Fuse link body size | Rated voltage | Rated current (Amps) | I ² t (A ² Sec) | | Watts loss (W) | | Catalogue numbers | | |
|---------------------|----------------------|----------------------|---------------------------------------|----------------------|--------------------|----------------|--------------------------|-----------------------|--------------------------------|
| | | | Pre-arcing | Total at 1000 V d.c. | 0.8 I _n | I _n | Blade without bolt holes | Blade with bolt holes | Blade with bolt holes and lugs |
| NH1 | 1000 V d.c. (IEC/UL) | 32 | 80 | 720 | 4 | 8 | PV-32ANH1 | PV-32ANH1-B | |
| | | 40 | 185 | 1670 | 5 | 9 | PV-40ANH1 | PV-40ANH1-B | |
| | | 50 | 400 | 3600 | 6 | 11 | PV-50ANH1 | PV-50ANH1-B | |
| | | 63 | 470 | 4300 | 6 | 12 | PV-63ANH1 | PV-63ANH1-B | PV-63ANH1-BL |
| | | 80 | 640 | 5760 | 8 | 15 | PV-80ANH1 | PV-80ANH1-B | PV-80ANH1-BL |
| | | 100 | 1300 | 11700 | 8 | 16 | PV-100ANH1 | PV-100ANH1-B | PV-100ANH1-BL |
| | | 110 | 2100 | 18900 | 9 | 18.5 | PV-110ANH1 | | |
| | | 125 | 2600 | 23400 | 9 | 17 | PV-125ANH1 | PV-125ANH1-B | PV-125ANH1-BL |
| | | 160 | 5200 | 46800 | 14 | 27 | PV-160ANH1 | PV-160ANH1-B | PV-160ANH1-BL |
| | | 175 | 8300 | 74700 | 15 | 29 | PV-175ANH1 | | |
| | | 200 | 10200 | 82000 | 13 | 25 | PV-200ANH1 | PV-200ANH1-B | PV-200ANH1-BL |
| NH2 | 1000 V d.c. (IEC/UL) | 160 | 4600 | 37000 | 14 | 28 | PV-160ANH2 | PV-160ANH2-B | PV-160ANH2-BL |
| | | 200 | 9500 | 76000 | 16 | 32 | PV-200ANH2 | PV-200ANH2-B | PV-200ANH2-BL |
| | | 250 | 17000 | 136000 | 19 | 38 | PV-250ANH2 | PV-250ANH2-B | PV-250ANH2-BL |
| NH3 | 1000 V d.c. (IEC/UL) | 300 | 32000 | 260000 | 24 | 40 | PV-300ANH3 | | |
| | | 315 | 32000 | 260000 | 26 | 44 | PV-315ANH3 | PV-315ANH3-B | PV-315ANH3-BL |
| | | 350 | 44500 | 370000 | 27 | 45 | PV-350ANH3 | | |
| | | 355 | 44500 | 370000 | 28 | 46 | PV-355ANH3 | | |
| | | 355 | 38000 | 310000 | 29 | 48 | | PV-355ANH3-B | PV-355ANH3-BL |
| | | 400 | 67500 | 550000 | 30 | 50 | PV-400ANH3 | | |
| | | 400 | 61000 | 490000 | 32 | 50 | | PV-400ANH3-B | PV-400ANH3-BL |

Compatible NH fuse bases and microswitches


| Fuse link body size | Rated voltage | Rated current (Amps) | Catalogue numbers | | | Compatible NH fuse bases | Compatible microswitches |
|---------------------|----------------------|----------------------|--------------------------|-----------------------|--------------------------------|--------------------------|--------------------------|
| | | | Blade without bolt holes | Blade with bolt holes | Blade with bolt holes and lugs | | |
| NH1 | 1000 V d.c. (IEC/UL) | 32 | PV-32ANH1 | PV-32ANH1-B | | SD1-D-PV | 170H0236 and 170H0238 |
| | | 40 | PV-40ANH1 | PV-40ANH1-B | | SD1-D-PV | 170H0236 and 170H0238 |
| | | 50 | PV-50ANH1 | PV-50ANH1-B | | SD1-D-PV | 170H0236 and 170H0238 |
| | | 63 | PV-63ANH1 | PV-63ANH1-B | PV-63ANH1-BL | SD1-D-PV | 170H0236 and 170H0238 |
| | | 80 | PV-80ANH1 | PV-80ANH1-B | PV-80ANH1-BL | SD1-D-PV | 170H0236 and 170H0238 |
| | | 100 | PV-100ANH1 | PV-100ANH1-B | PV-100ANH1-BL | SD1-D-PV | 170H0236 and 170H0238 |
| | | 110 | PV-110ANH1 | | | SD1-D-PV | 170H0236 and 170H0238 |
| | | 125 | PV-125ANH1 | PV-125ANH1-B | PV-125ANH1-BL | SD1-D-PV | 170H0236 and 170H0238 |
| | | 160 | PV-160ANH1 | PV-160ANH1-B | PV-160ANH1-BL | SD1-D-PV | 170H0236 and 170H0238 |
| | | 175 | PV-175ANH1 | | | SD1-D-PV | 170H0236 and 170H0238 |
| | | 200 | PV-200ANH1 | PV-200ANH1-B | PV-200ANH1-BL | SD1-D-PV | 170H0236 and 170H0238 |
| NH2 | 1000 V d.c. (IEC/UL) | 160 | PV-160ANH2 | PV-160ANH2-B | PV-160ANH2-BL | SD2-D-PV | 170H0236 and 170H0238 |
| | | 200 | PV-200ANH2 | PV-200ANH2-B | PV-200ANH2-BL | SD2-D-PV | 170H0236 and 170H0238 |
| | | 250 | PV-250ANH2 | PV-250ANH2-B | PV-250ANH2-BL | SD2-D-PV | 170H0236 and 170H0238 |
| NH3 | 1000 V d.c. (IEC/UL) | 300 | PV-300ANH3 | | | SD3-D-PV | 170H0236 and 170H0238 |
| | | 315 | PV-315ANH3 | PV-315ANH3-B | PV-315ANH3-BL | SD3-D-PV | 170H0236 and 170H0238 |
| | | 350 | PV-350ANH3 | | | SD3-D-PV | 170H0236 and 170H0238 |
| | | 355 | PV-355ANH3 | | | SD3-D-PV | 170H0236 and 170H0238 |
| | | 355 | | PV-355ANH3-B | PV-355ANH3-BL | SD3-D-PV | 170H0236 and 170H0238 |
| | | 400 | PV-400ANH3 | | | SD3-D-PV | 170H0236 and 170H0238 |
| | | 400 | | PV-400ANH3-B | PV-400ANH3-BL | SD3-D-PV | 170H0236 and 170H0238 |

PV-ANH, NH Photovoltaic fuse links, 32 to 400 A, 1000 V d.c.

Dimensions (mm) NH1 Blade without bolt holes

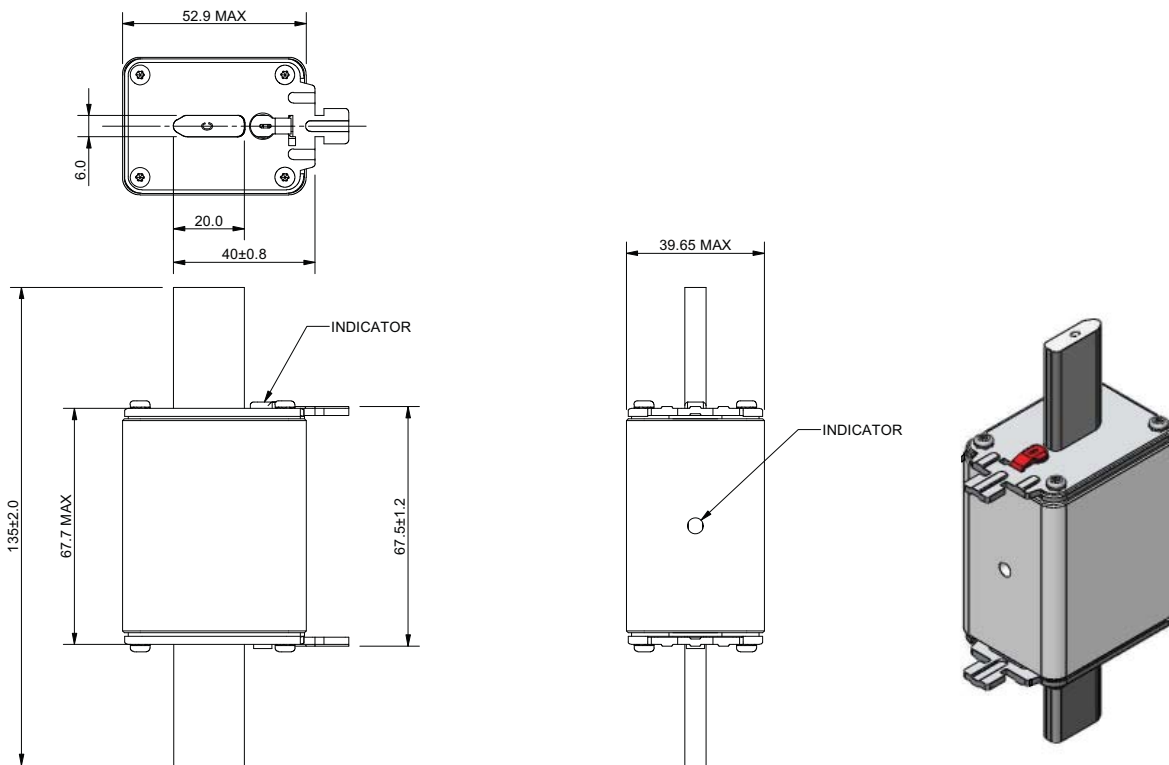


Dimensions (mm) NH2 Blade without bolt holes

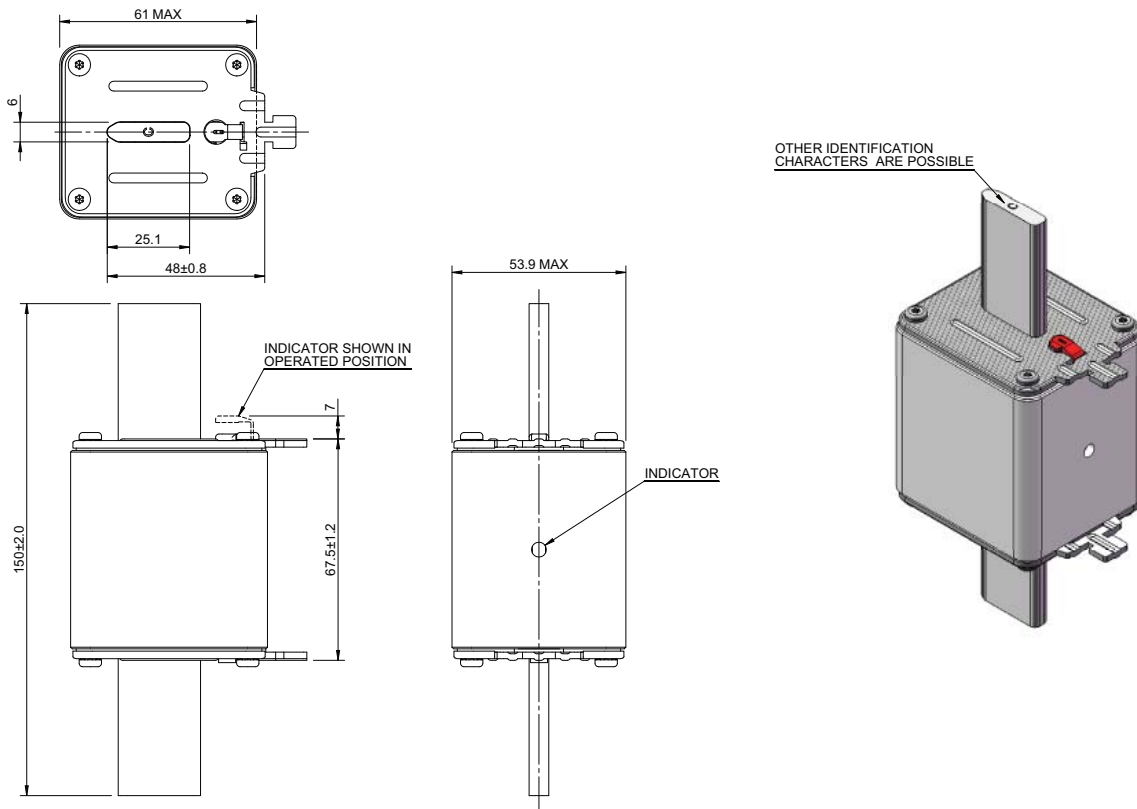


PV-ANH, NH Photovoltaic fuse links, 32 to 400 A, 1000 V d.c.

Dimensions (mm) NH3 Blade without bolt holes

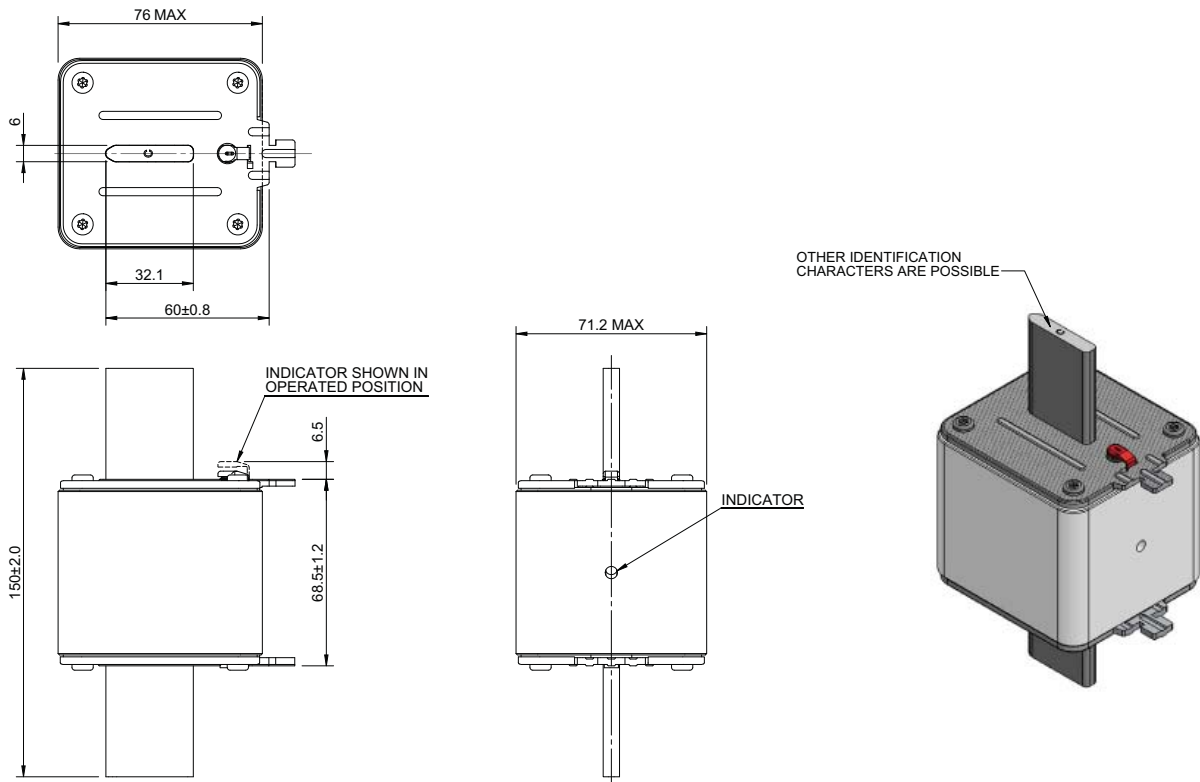


Dimensions (mm) NH1 Blade with bolt holes

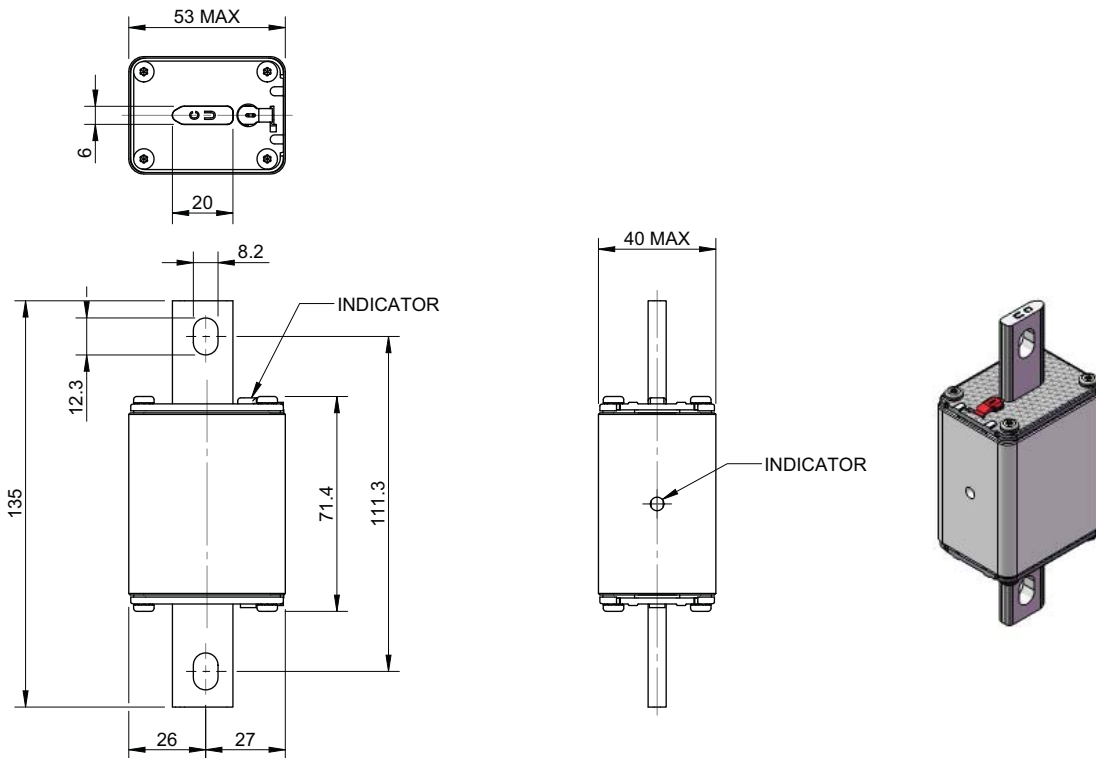


PV-ANH, NH Photovoltaic fuse links, 32 to 400 A, 1000 V d.c.

Dimensions (mm) NH2 Blade with bolt holes

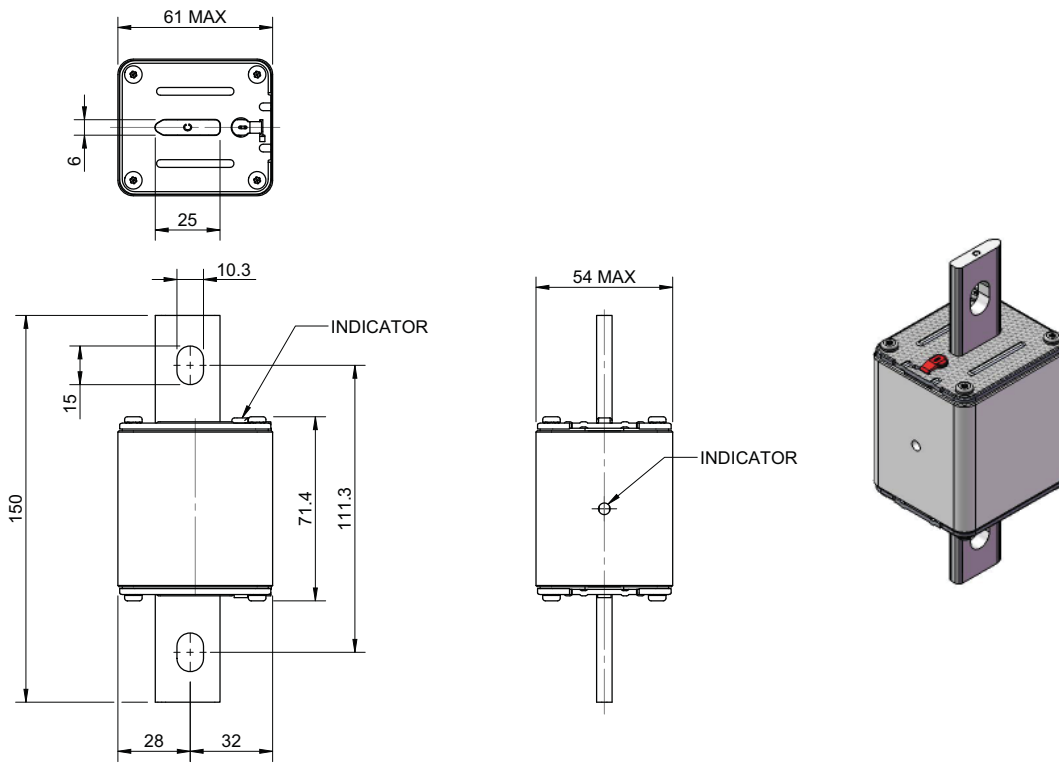


Dimensions (mm) NH3 Blade with bolt holes

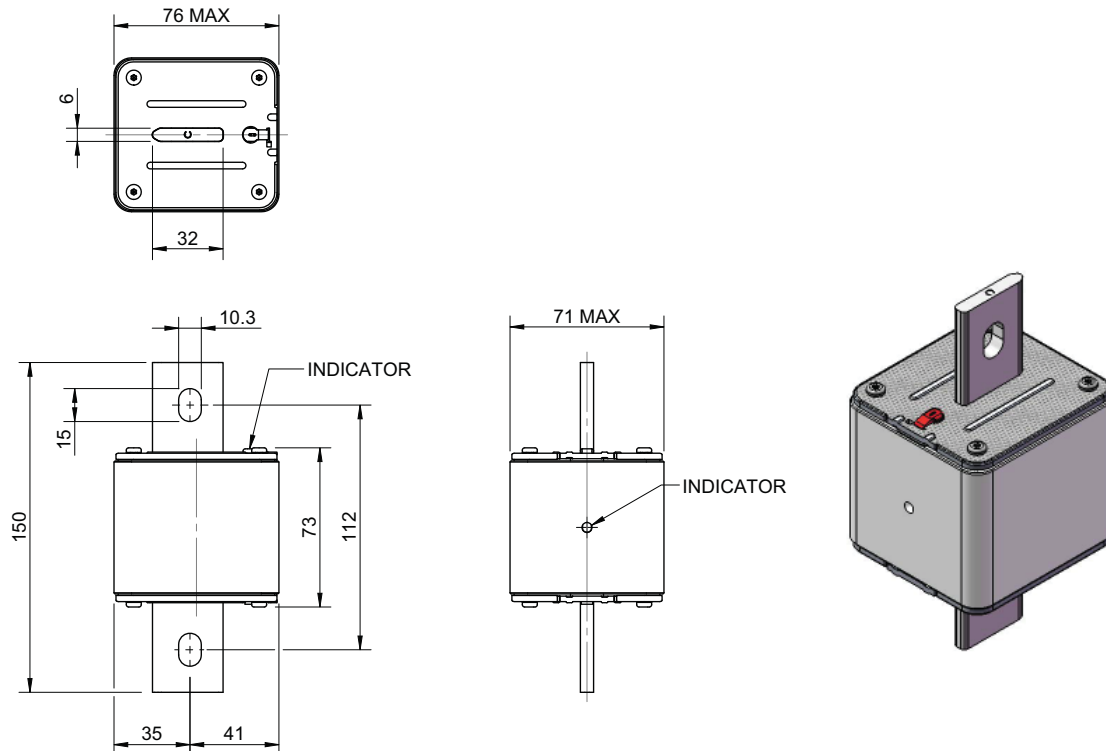


PV-ANH, NH Photovoltaic fuse links, 32 to 400 A, 1000 V d.c.

Dimensions (mm) NH1 Blade with bolt holes and lugs

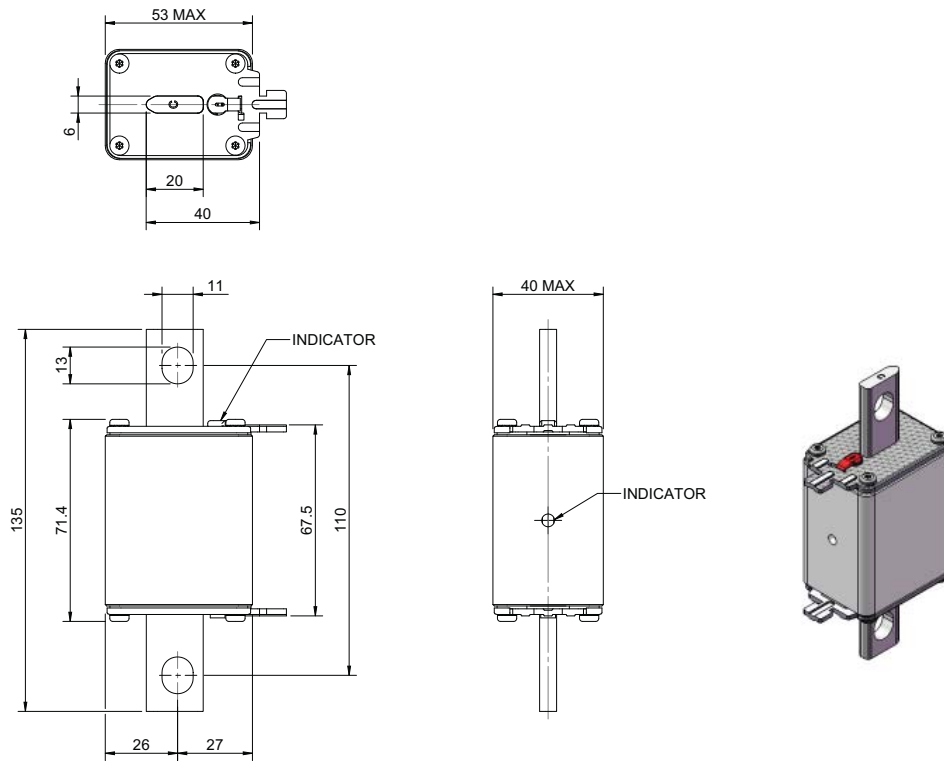


Dimensions (mm) NH2 Blade with bolt holes and lugs

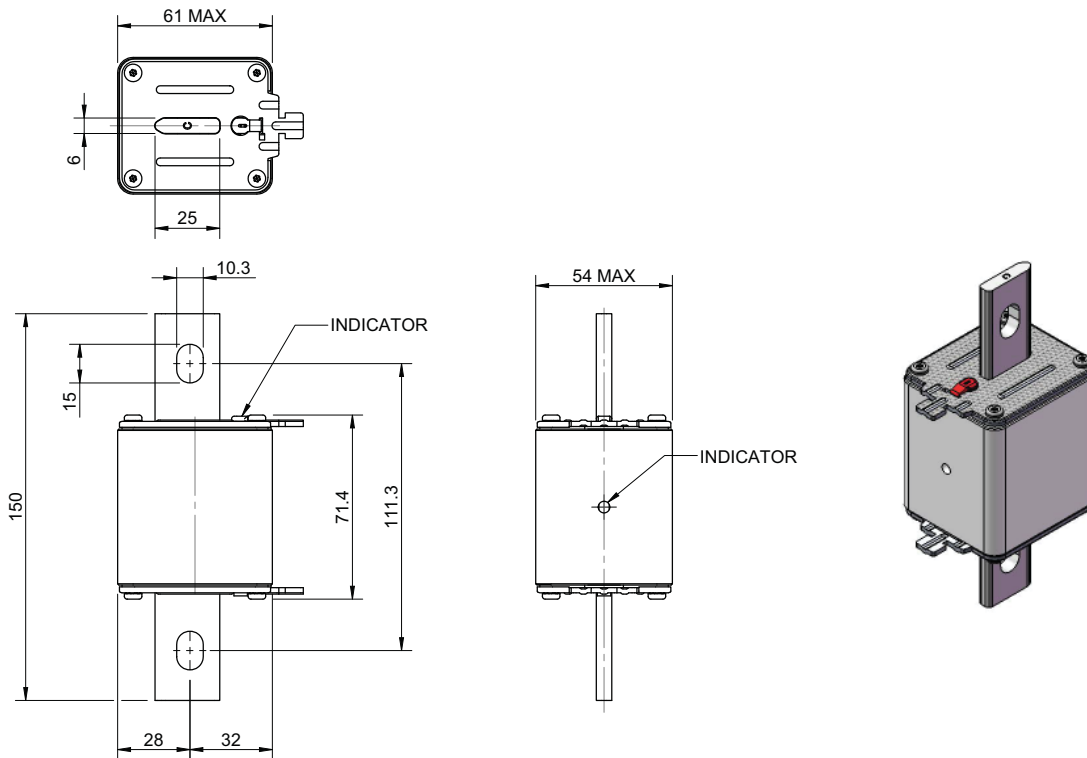


PV-ANH, NH Photovoltaic fuse links, 32 to 400 A, 1000 V d.c.

Dimensions (mm) NH3 Blade with bolt holes and lugs

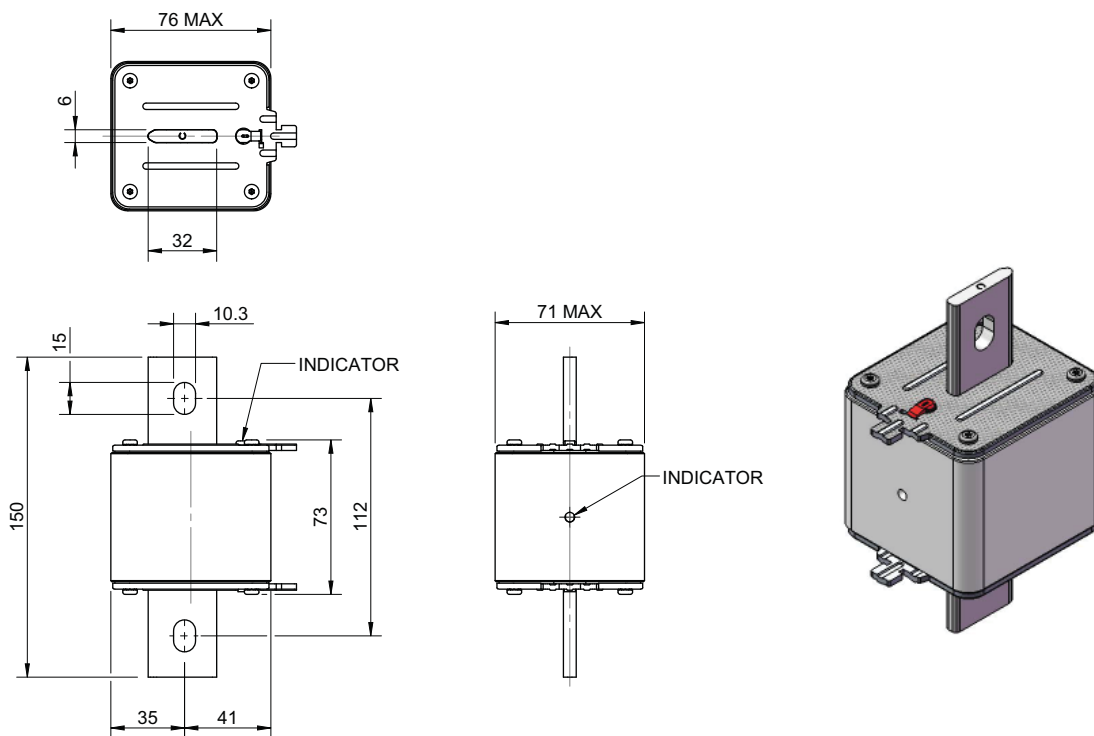


Time-current curve size 1 - 32 A to 200 A

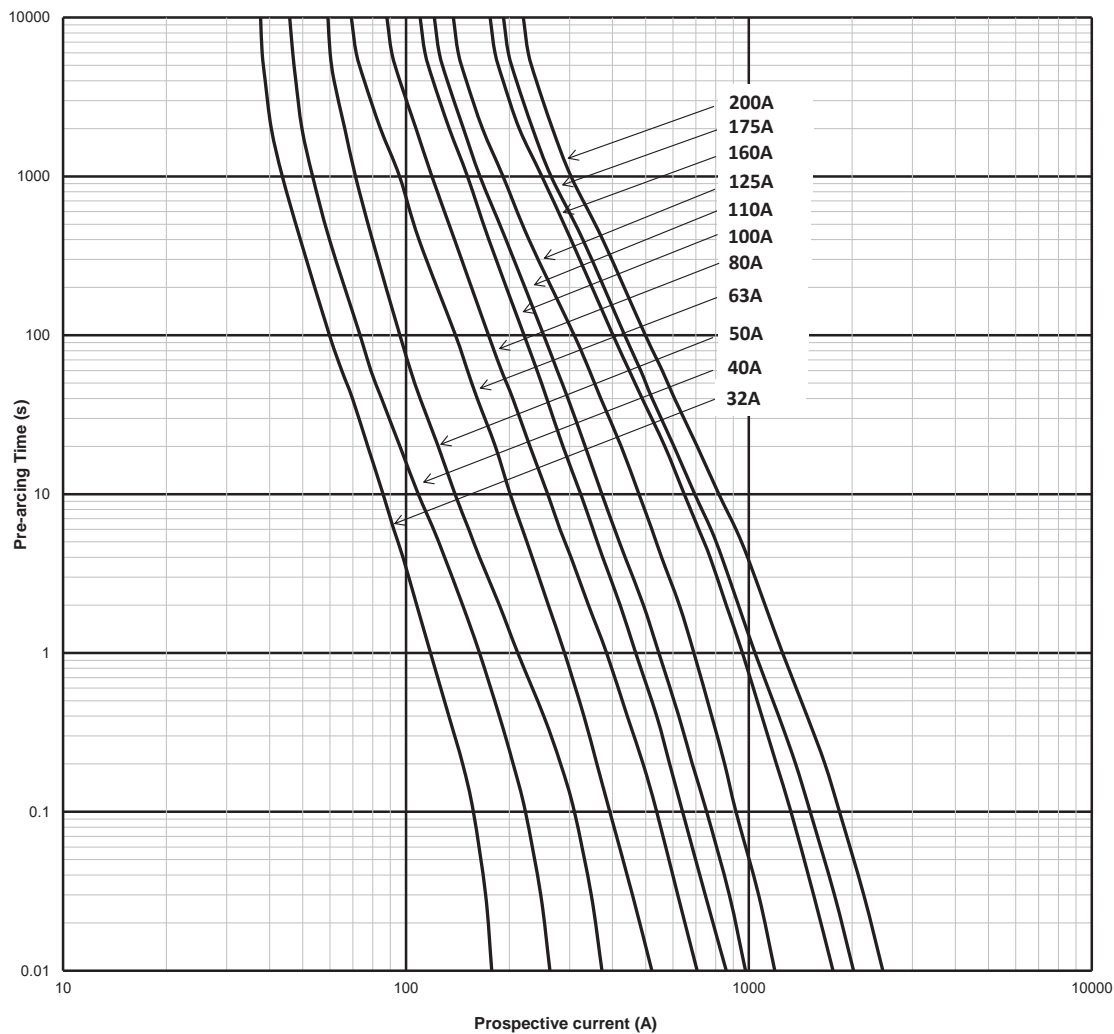


PV-ANH, NH Photovoltaic fuse links, 32 to 400 A, 1000 V d.c.

Time-current curve size 2 - 160 A to 250 A

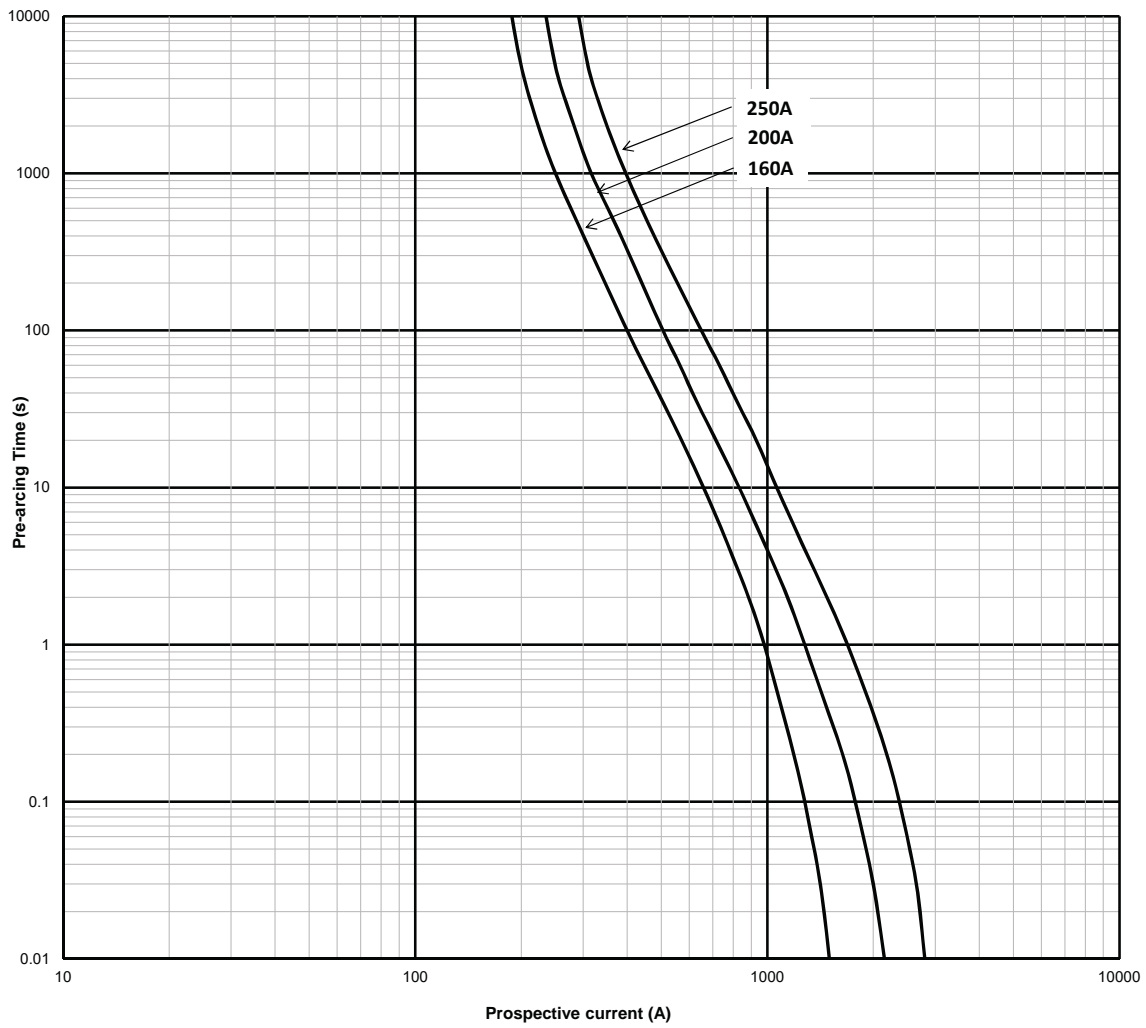


PV-ANH, NH Photovoltaic fuse links, 32 to 400 A, 1000 V d.c.

Time-current curve size 3 - 300 A to 400 A

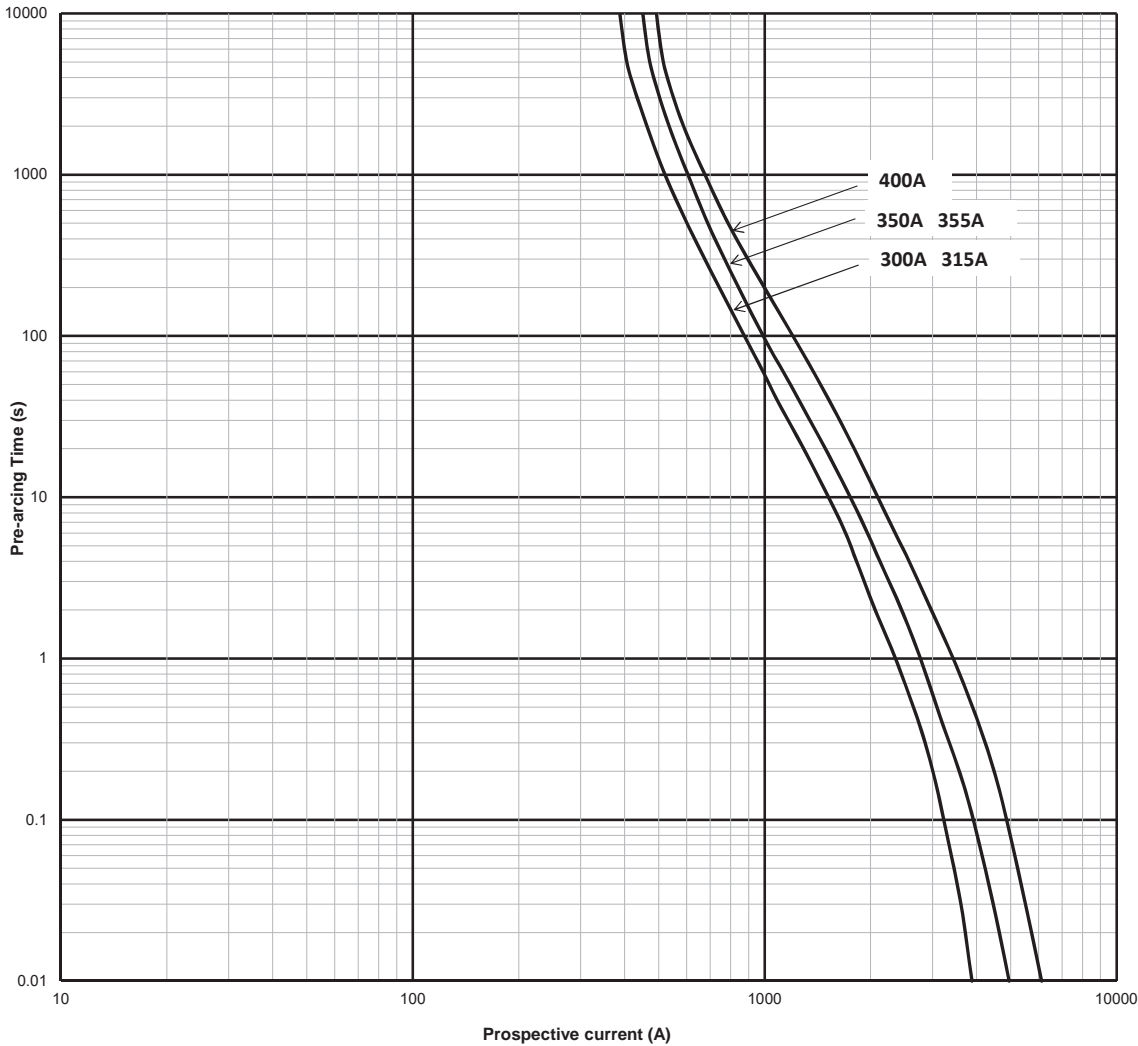

Temperature derating curve - sizes 1 to 3

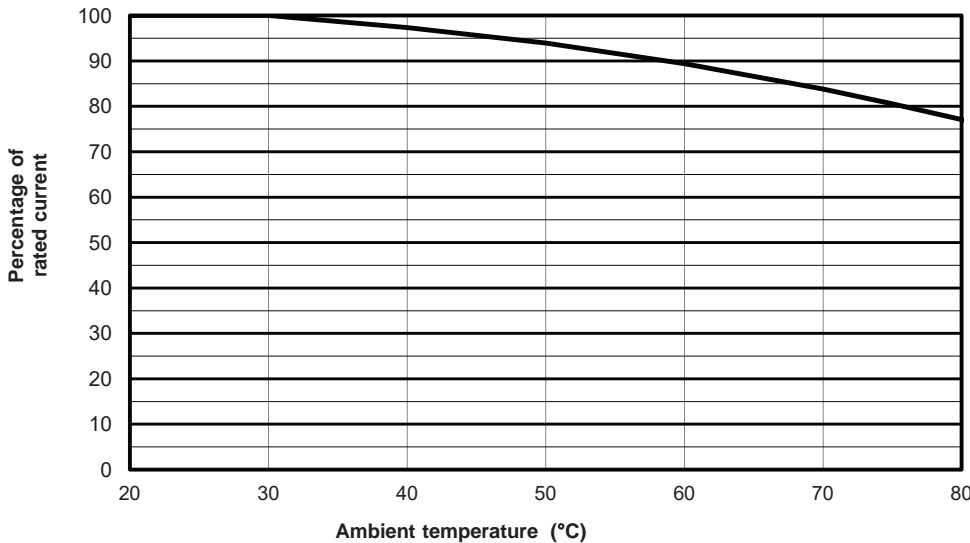

SD-D-PV, NH Bases, 250 to 630 A, 1500 V d.c. (IEC), 1000 V d.c. (UL/CSA)

Description

Sizes 1 to 3 NH Fuse bases specifically designed for use with Bussmann series range of NH PV (Photovoltaic) fuse links.

Technical data

Rated voltage:

- 1500 V d.c. (IEC)
- 1000 V d.c. (UL/CSA)

Rated current:

- 250 A (SD1)
- 400 A (SD2)
- 630 A (SD3)

Fuse base sizes: 1 to 3

Withstand: 50 kA

Power acceptance

- SD1: 32 W
- SD2: 45 W
- SD3: 60 W



Standards / Agency information

IEC 60269-1

UL Listed - UL File #E348242,

CSA file #47235

Accessories:


Microswitches - 170H0236, 170H0238 or BVL50

BVL50 IP20 Finger-Safe Protection Kit - TD1-IP20, TD2-IP20, TD3-IP20.

Fuse extraction handle

Shroud kits

Dimensions (mm) 1-pole with phase barriers

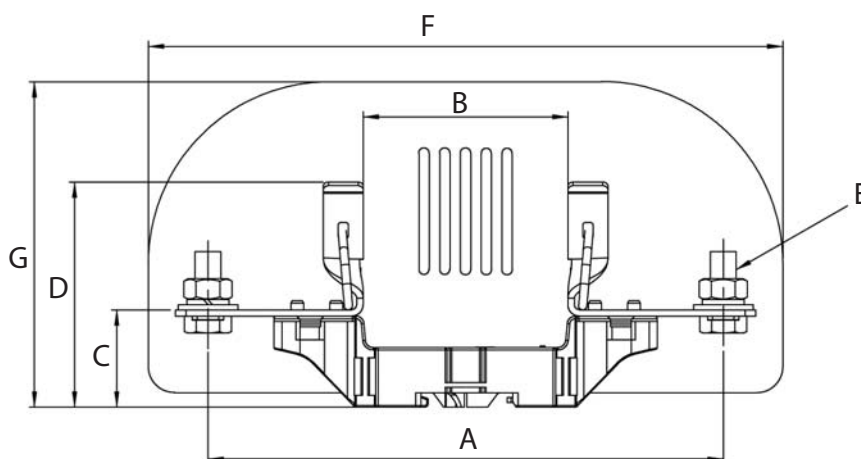


| Catalogue numbers | Poles/Type | A | B | C | D | E | F | G |
|-------------------|------------|-----|----|------|----|--------|-----|-------|
| SD1-D-PV | 1-pole | 175 | 79 | 37 | 78 | M10x25 | 245 | 125.5 |
| SD2-D-PV | 1 pole | 199 | 79 | 37.5 | 86 | M10x25 | 245 | 125.5 |
| SD3-D-PV | 1-pole | 209 | 82 | 37.5 | 88 | M12x30 | 260 | 137.5 |

Data sheet: 720149

SD-D-PV, NH Bases, 250 to 630 A, 1500 V d.c. (IEC), 1000 V d.c. (UL/CSA)

Dimensions (mm) 1-pole without phase barriers

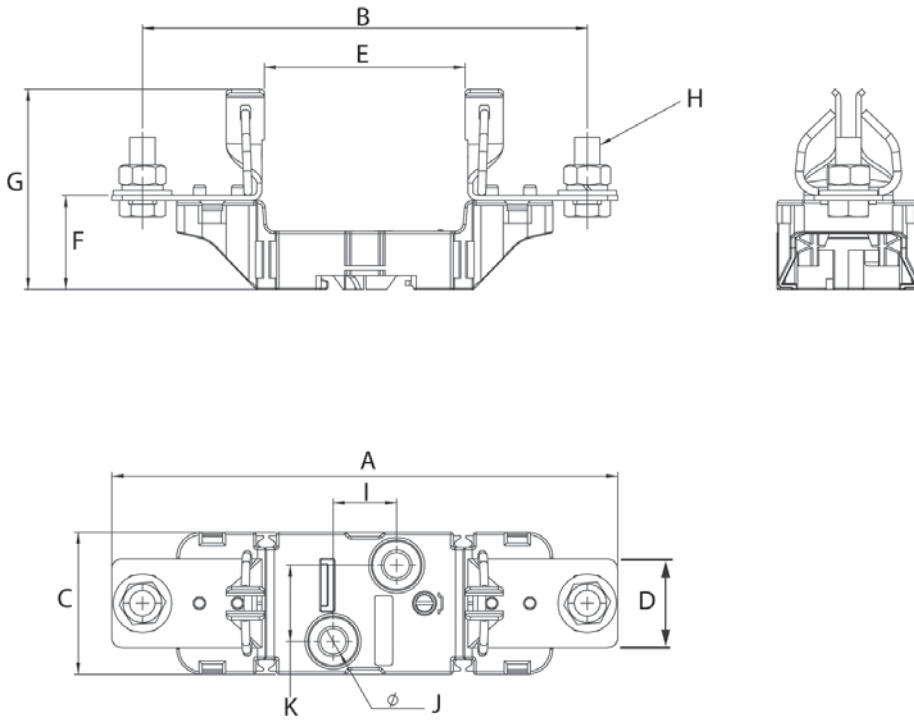

| Catalogue numbers | Poles | A | B | C | D | E | F | G | H | I | J | K |
|-------------------|--------|-----|-----|----|----|----|------|----|--------|----|----|----|
| SD1-D-PV | 1-pole | 199 | 175 | 56 | 35 | 79 | 37 | 78 | M10x25 | 25 | 10 | 30 |
| SD2-D-PV | 1 pole | 224 | 199 | 56 | 35 | 79 | 37.5 | 86 | M10x25 | 25 | 10 | 30 |
| SD3-D-PV | 1-pole | 239 | 209 | 56 | 36 | 82 | 37.5 | 88 | M12x30 | 25 | 10 | 30 |

PV-AF Series, PV Flush end, 160 to 400 A, 1000 V d.c.

Description

A range of flush end package fuse links specifically designed for protecting and isolating photovoltaic array combiners and disconnects. These fuse links are capable of interrupting low overcurrents associated with faulted PV systems (reverse current, multi-array fault).

Catalogue number

PV-(amp rating)AF2 - size 2

PV-(amp rating)AF3 - size 3

Class of operation

gPV

Technical data

Rated voltage: 1000 V d.c. (IEC and UL)

Rated current: 160 A to 400 A

Breaking capacity: 50 kA

Operating class: gPV and UL PV fuse links

Optional microswitches

170H0069

Standards / Approvals

Tested to IEC 60269-6

UL 2579 (file number E335324)

CSA

RoHS compliant

Packaging

MOQ: 2 for size 2 (PV-xAF2), 1 for size 3 (PV-xAF3)

Packaging 100% recyclable.




Technical data


| Fuse link type | Fuse link body size | Rated voltage | Rated current (Amps) | I ² t (A ² Sec) | | Watts loss (W) | | Catalogue numbers |
|----------------|---------------------|---------------------|----------------------|---------------------------------------|----------------------|--------------------|----------------|-------------------|
| | | | | Pre-arcing | Total at 1000 V d.c. | 0.8 I _n | I _n | |
| Flush end | 2 | 1000 V d.c.(IEC/UL) | 160 | 4600 | 37,000 | 15 | 30 | PV-160AF2 |
| | | | 200 | 9500 | 76,000 | 17 | 34 | PV-200AF2 |
| | | | 250 | 17,000 | 136,000 | 19 | 38 | PV-250AF2 |
| | 3 | 1000 V d.c.(IEC/UL) | 315 | 27,000 | 240,000 | 30 | 49 | PV-315AF3 |
| | | | 355 | 37,000 | 350,000 | 31 | 51 | PV-355AF3 |
| | | | 400 | 61,500 | 550,000 | 32 | 52 | PV-400AF3 |

PV-AF, PV Flush end, 160 to 400 A, 1000 V d.c.

Dimensions (mm) - size 2

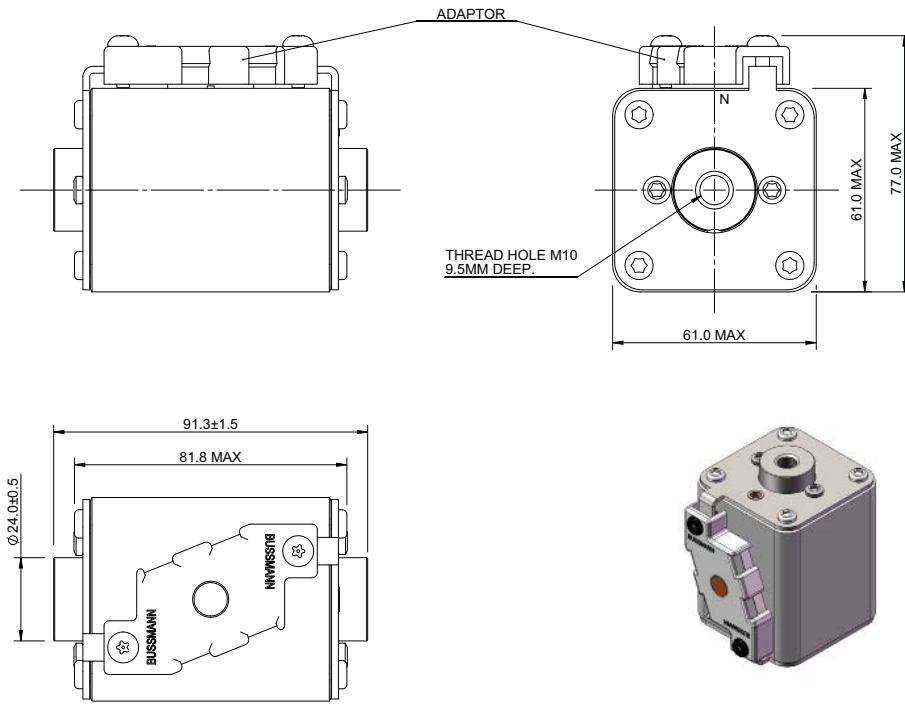


Dimensions (mm) - size 3

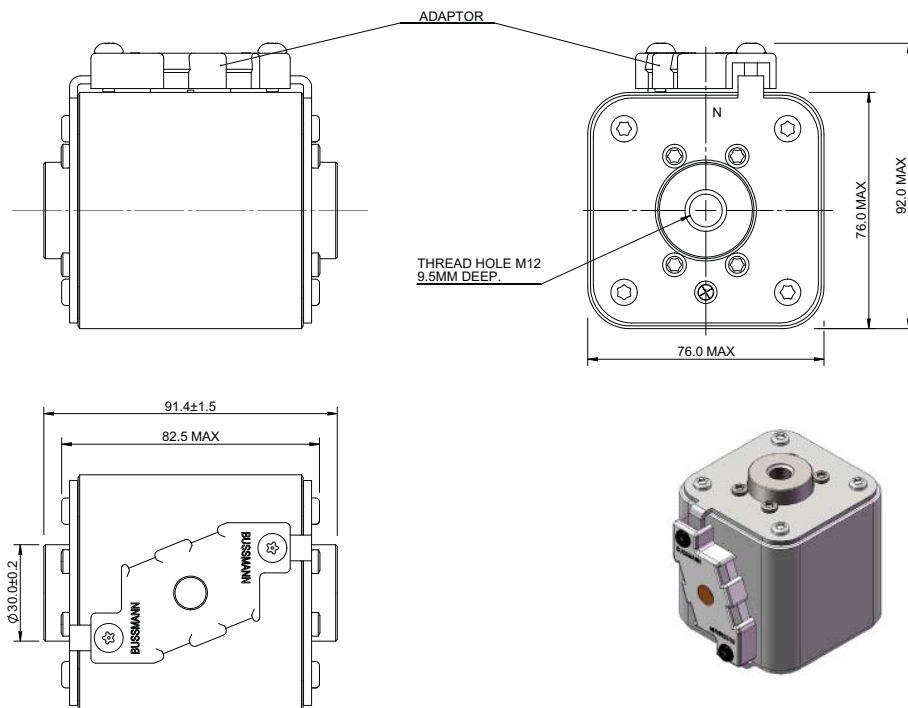


PV-AF Series, PV Flush end, 160 to 400 A, 1000 V d.c.

Time-current curve size 2 - 160 A to 250 A

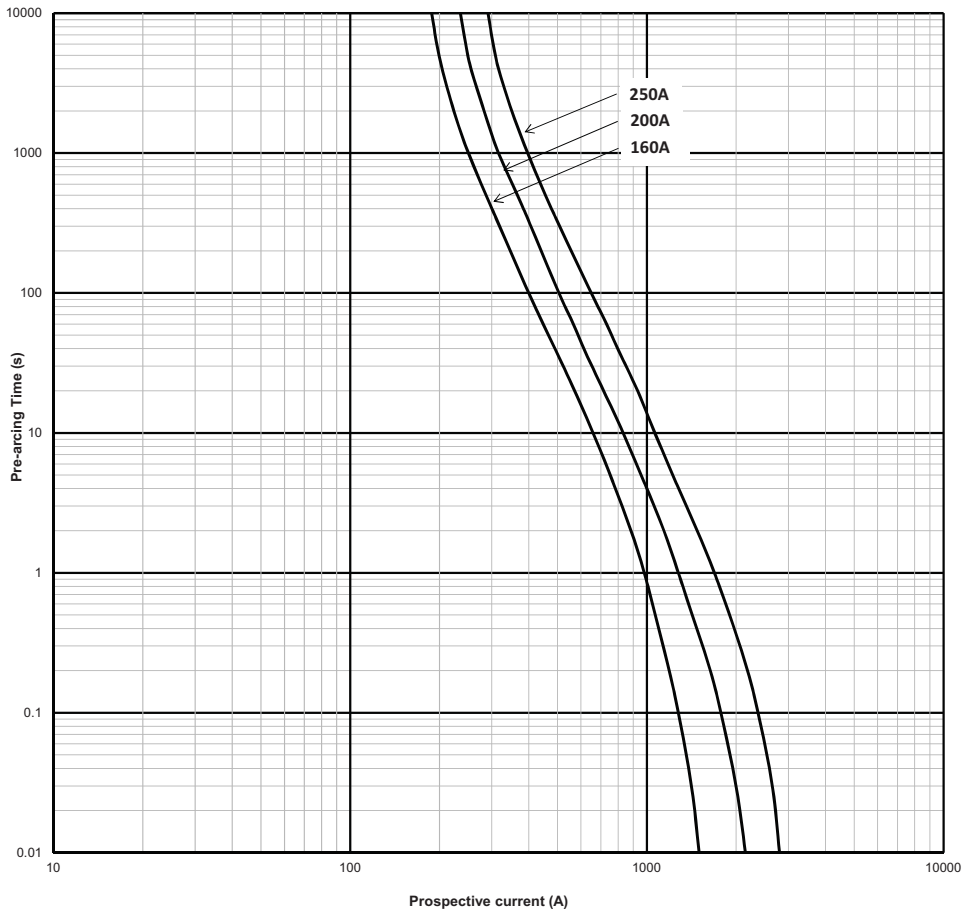

Time-current curve size 3 - 315 A to 400 A

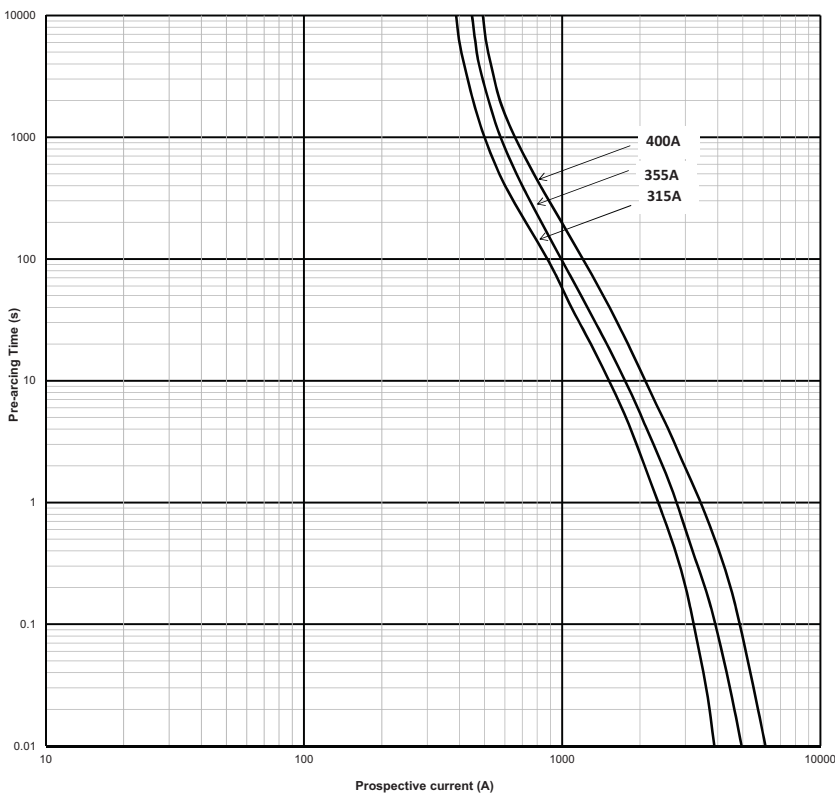

PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Description

A range of XL package fuse links specifically designed for protecting and isolating photovoltaic array combiners and disconnects. These fuse links are capable of interrupting low overcurrents associated with faulted PV systems (reverse current, multi-array fault).

Catalogue number

PV-(amp rating)A-(size)XL (1000 V d.c. Bladed)

PV-(amp rating)A-(size)XL-B (1000 V d.c. Bolted)

PV-(amp rating)A-2XL-3B¹ (1000 V d.c. Bolted)

PV-(amp rating)A-(size)XL-15 (1500 V d.c. Bladed)

PV-(amp rating)A-(size)XL-B-15 (1500 V d.c. Bolted)

PV-(amp rating)A-2XL-3B-15¹ (1500 V d.c. Bolted)

Technical data

Rated voltage:

- 1000 V d.c. (IEC and UL 63 to 600 A)
- 1200 V d.c. (IEC and UL 160 A)
- 1500 V d.c. (IEC and UL 50 to 400 A)

Rated current: 50 A to 600 A

Breaking capacity:

- Size 01 and 3: 50 kA at 1000 V d.c., 30 kA at 1500 V d.c.
- Size 1 and 2: 33 kA at 1000 V d.c., 30 kA at 1500 V d.c.
- Size 3L: 100 kA at 1500 V d.c.6ms

Operating class: gPV and UL PV fuse links

Fuse size

01XL, 1XL, 2XL and 3L

Standards / Approvals

IEC 60269-6,

UL 2579 (File number E335324)

RoHS compliant

Packaging

MOQ: 1

Packaging 100% recyclable

Recommended single-pole fuse bases and microswitches

See tables pages 50 to 52



170H0236



170H0069



SD_XL-S

¹ PV-*A-2XL-3B and PV-*A-2XL-3B-15 have revised bolting patterns, which are identical to size 3L bolting pattern. This allows utilisation of both size 2XL and size 3L fuse links without changing the dimensional layout of the inverter, combiners and disconnects.

Data sheet: 10201

PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Technical Data - 1000 V d.c.

| Fuse link body size | Rated voltage | Rated current (Amps) | Breaking capacity (kA) | I ² t (A ² Sec) | | Watts loss (W) | | Catalogue numbers | |
|---------------------|---------------|----------------------|------------------------|---------------------------------------|----------------------|--------------------|----------------|-------------------|-----------------------------|
| | | | | Pre-arcing | Total at 1000 V d.c. | 0.7 I _n | I _n | Bladed version | Bolted version |
| 01 | 1000 V d.c. | 63 | 50 | 260 | 1900 | 10 | 24 | PV-63A-01XL | PV-63A-01XL-B |
| | | 80 | 50 | 490 | 3600 | 12 | 29 | PV-80A-01XL | PV-80A-01XL-B |
| | | 100 | 50 | 870 | 6300 | 13 | 32 | PV-100A-01XL | PV-100A-01XL-B |
| | | 125 | 50 | 1930 | 13,900 | 16 | 40 | PV-125A-01XL | PV-125A-01XL-B |
| | | 160 | 50 | 3900 | 28,100 | 18 | 44 | PV-160A-01XL | PV-160A-01XL-B |
| 2 | 1000 V d.c. | 160 | 33 | 2780 | 21,000 | 18 | 44 | PV-160A-2XL | PV-160A-2XL-B |
| | | 200 | 33 | 4950 | 37,000 | 20 | 50 | PV-200A-2XL | PV-200A-2XL-B |
| | | 250 | 33 | 9450 | 70,000 | 24 | 60 | PV-250A-2XL | PV-250A-2XL-B |
| | | 315 | 33 | 16,600 | 123,000 | 26 | 66 | PV-315A-2XL | PV-315A-2XL-B |
| | | 355 | 33 | 26,000 | 192,000 | 27 | 68 | PV-355A-2XL | PV-355A-2XL-B |
| | | 160 | 33 | 2780 | 21,000 | 18 | 44 | | PV-160A-2XL-3B ¹ |
| | | 200 | 33 | 4950 | 37,000 | 20 | 50 | | PV-200A-2XL-3B ¹ |
| | | 250 | 33 | 9450 | 70,000 | 24 | 60 | | PV-250A-2XL-3B ¹ |
| | | 315 | 33 | 16,600 | 123,000 | 26 | 66 | | PV-315A-2XL-3B ¹ |
| | | 355 | 33 | 26,000 | 192,000 | 27 | 68 | | PV-355A-2XL-3B ¹ |
| 3 | 1000 V d.c. | 350 | 50 | 31,000 | 161,200 | 26 | 65 | PV-350A-3L | PV-350A-3L-B |
| | | 400 | 50 | 44,500 | 231,400 | 33 | 82 | PV-400A-3L | PV-400A-3L-B |
| | | 500 | 50 | 85,000 | 442,000 | 34 | 85 | PV-500A-3L | PV-500A-3L-B |
| | | 600 | 50 | 137,000 | 712,400 | 43 | 108 | PV-600A-3L | PV-600A-3L-B |

Technical Data - 1500 V d.c.

| Fuse link body size | Rated voltage | Rated current (Amps) | Breaking capacity (kA) | I ² t (A ² Sec) | | Watts loss (W) | | Catalogue numbers | | | |
|---------------------|---------------|----------------------|------------------------|---------------------------------------|------------------------------|--------------------|----------------|---------------------------|------------------------------|------------------------------------|---------------------------------|
| | | | | Pre-arcing | Total at 1500 V ¹ | 0.7 I _n | I _n | Bladed with top indicator | Bladed without top indicator | Bolted version with side indicator | Bolted without side indicator |
| 01 | 1500 V d.c. | 50 | 30 | 175 | 1000 | 10 | 25 | PV-50A-01XL-15 | | PV-50A-01XL-B-15 | |
| | | 63 | 30 | 362 | 2250 | 10 | 26 | PV-63A-01XL-15 | | PV-63A-01XL-B-15 | |
| | | 80 | 30 | 565 | 3300 | 14 | 35 | PV-80A-01XL-15 | | PV-80A-01XL-B-15 | |
| | | 100 | 30 | 1100 | 6600 | 16 | 40 | PV-100A-01XL-15 | | PV-100A-01XL-B-15 | |
| | | 125 | 30 | 2200 | 10,500 | 18 | 44 | PV-125A-01XL-15 | | PV-125A-01XL-B-15 | |
| 1 | 1500 V d.c. | 100 | 30 | 1250 | 6000 | 24 | 43 | PV-100A-1XL-15 | | PV-100A-1XL-B-15 | |
| | | 125 | 30 | 1950 | 9360 | 25 | 52 | PV-125A-1XL-15 | | PV-125A-1XL-B-15 | |
| | | 160 | 30 | 4200 | 20,160 | 26 | 54 | PV-160A-1XL-15 | | PV-160A-1XL-B-15 | |
| | | 200 | 30 | 9400 | 45,120 | 31 | 60 | PV-200A-1XL-15 | | PV-200A-1XL-B-15 | |
| 2 | 1500 V d.c. | 125 | 30 | 2200 | 15,000 | 18 | 44 | PV-125A-2XL-15 | PV-125A-2XL-U-15 | PV-125A-2XL-B-15 | PV-125A-2XL-BU-15 |
| | | 160 | 30 | 5000 | 32,000 | 19 | 48 | PV-160A-2XL-15 | PV-160A-2XL-U-15 | PV-160A-2XL-B-15 | PV-160A-2XL-BU-15 |
| | | 200 | 30 | 8800 | 51,000 | 23 | 57 | PV-200A-2XL-15 | PV-200A-2XL-U-15 | PV-200A-2XL-B-15 | PV-200A-2XL-BU-15 |
| | | 250 | 30 | 16,600 | 85,000 | 28 | 70 | PV-250A-2XL-15 | PV-250A-2XL-U-15 | PV-250A-2XL-B-15 | PV-250A-2XL-BU-15 |
| | | 125 | 30 | 2200 | 15,000 | 18 | 44 | | | PV-125A-2XL-3B-15 ¹ | PV-125A-2XL-3BU-15 ¹ |
| | | 160 | 30 | 5000 | 32,000 | 19 | 48 | | | PV-160A-2XL-3B-15 ¹ | PV-160A-2XL-3BU-15 ¹ |
| | | 200 | 30 | 8800 | 51,000 | 23 | 57 | | | PV-200A-2XL-3B-15 ¹ | PV-200A-2XL-3BU-15 ¹ |
| | | 250 | 30 | 16,600 | 85,000 | 28 | 70 | | | PV-250A-2XL-3B-15 ¹ | PV-250A-2XL-3BU-15 ¹ |
| 3 | 1500 V d.c. | 250 | 100 | 74,000 | 263,000 | 20 | 49 | PV-250A-3L-15 | PV-250A-3L-U-15 | PV-250A-3L-B-15 | PV-250A-3L-BU-15 |
| | | 315 | 100 | 150,000 | 533,000 | 21 | 52 | PV-315A-3L-15 | PV-315A-3L-U-15 | PV-315A-3L-B-15 | PV-315A-3L-BU-15 |
| | | 350 | 100 | 195,000 | 693,000 | 24 | 59 | PV-350A-3L-15 | PV-350A-3L-U-15 | PV-350A-3L-B-15 | PV-350A-3L-BU-15 |
| | | 355 | 100 | 195,000 | 693,000 | 24 | 59 | PV-355A-3L-15 | PV-355A-3L-U-15 | PV-355A-3L-B-15 | PV-355A-3L-BU-15 |
| | | 400 | 100 | 296,000 | 1,060,000 | 24 | 61 | PV-400A-3L-15 | PV-400A-3L-U-15 | PV-400A-3L-B-15 | PV-400A-3L-BU-15 |
| | | 450 | 100 | 412,000 | 1,470,000 | 27 | 67 | PV-450A-3L-15 | PV-450A-3L-U-15 | PV-450A-3L-B-15 | PV-450A-3L-BU-15 |
| | | 500 | 100 | 532,000 | 1,890,000 | 29 | 73 | PV-500A-3L-15 | PV-500A-3L-U-15 | PV-500A-3L-B-15 | PV-500A-3L-BU-15 |

¹ PV-*A-2XL-3B and PV-*A-2XL-3B-15 have revised bolting patterns, which are identical to size 3L bolting pattern. This allows utilisation of both size 2XL and size 3L fuse links without changing the dimensional layout of the inverter, combiners and disconnects.

PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Compatible fuse bases and microswitches - 1000 V d.c.

| Fuse link body size | Rated voltage | Rated current (Amps) | Fuse type | Catalogue numbers | Compatible Fuse bases | Compatible microswitches |
|---------------------|---------------|----------------------|----------------|-----------------------------|-----------------------|--------------------------|
| 01 | 1000 V d.c. | 63 | | PV-63A-01XL | SD1XL-S-PV | 170H0236/170H0238 |
| | | 80 | | PV-80A-01XL | SD1XL-S-PV | 170H0236/170H0238 |
| | | 100 | | PV-100A-01XL | SD1XL-S-PV | 170H0236/170H0238 |
| | | 125 | | PV-125A-01XL | SD1XL-S-PV | 170H0236/170H0238 |
| | | 160 | | PV-160A-01XL | SD1XL-S-PV | 170H0236/170H0238 |
| 2 | 1000 V d.c. | 160 | Bladed version | PV-160A-2XL | SD2XL-S-PV | 170H0236/170H0238 |
| | | 200 | | PV-200A-2XL | SD2XL-S-PV | 170H0236/170H0238 |
| | | 250 | | PV-250A-2XL | SD2XL-S-PV | 170H0236/170H0238 |
| | | 315 | | PV-315A-2XL | SD2XL-S-PV | 170H0236/170H0238 |
| | | 355 | | PV-355A-2XL | SD2XL-S-PV | 170H0236/170H0238 |
| 3 | 1000 V d.c. | 350 | | PV-350A-3L | SD3L-S-PV | 170H0236/170H0238 |
| | | 400 | | PV-400A-3L | SD3L-S-PV | 170H0236/170H0238 |
| | | 500 | | PV-500A-3L | SD3L-S-PV | 170H0236/170H0238 |
| | | 600 | | PV-600A-3L | SD3L-S-PV | 170H0236/170H0238 |
| 01 | 1000 V d.c. | 63 | | PV-63A-01XL-B | | 170H0069 |
| | | 80 | | PV-80A-01XL-B | | 170H0069 |
| | | 100 | | PV-100A-01XL-B | | 170H0069 |
| | | 125 | | PV-125A-01XL-B | | 170H0069 |
| | | 160 | | PV-160A-01XL-B | | 170H0069 |
| 2 | 1000 V d.c. | 160 | Bolted version | PV-160A-2XL-B | | 170H0069 |
| | | 200 | | PV-200A-2XL-B | | 170H0069 |
| | | 250 | | PV-250A-2XL-B | | 170H0069 |
| | | 315 | | PV-315A-2XL-B | | 170H0069 |
| | | 355 | | PV-355A-2XL-B | | 170H0069 |
| | | 160 | | PV-160A-2XL-3B ¹ | | 170H0069 |
| | | 200 | | PV-200A-2XL-3B ¹ | | 170H0069 |
| | | 250 | | PV-250A-2XL-3B ¹ | | 170H0069 |
| | | 315 | | PV-315A-2XL-3B ¹ | | 170H0069 |
| | | 355 | | PV-355A-2XL-3B ¹ | | 170H0069 |
| 3 | 1000 V d.c. | 350 | | PV-350A-3L-B | 170H0069 | |
| | | 400 | | PV-400A-3L-B | 170H0069 | |
| | | 500 | | PV-500A-3L-B | 170H0069 | |
| | | 600 | | PV-600A-3L-B | 170H0069 | |

PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Compatible fuse bases and microswitches - 1500 V d.c.- Bladed

| Fuse link body size | Rated voltage | Rated current (Amps) | Fuse type | Catalogue numbers | Compatible XL Bases | Compatible micro-switches |
|---------------------|---------------|----------------------|------------------------------|-------------------|---------------------|---------------------------|
| 01 | 1500 V d.c. | 50 | | PV-50A-01XL-15 | SD1XL-S-PV | 170H0236/170H0238 |
| | | 63 | | PV-63A-01XL-15 | SD1XL-S-PV | 170H0236/170H0238 |
| | | 80 | | PV-80A-01XL-15 | SD1XL-S-PV | 170H0236/170H0238 |
| | | 100 | | PV-100A-01XL-15 | SD1XL-S-PV | 170H0236/170H0238 |
| | | 125 | | PV-125A-01XL-15 | SD1XL-S-PV | 170H0236/170H0238 |
| 1 | 1500 V d.c. | 100 | | PV-100A-1XL-15 | SD1XL-S-PV | 170H0236/170H0238 |
| | | 125 | | PV-125A-1XL-15 | SD1XL-S-PV | 170H0236/170H0238 |
| | | 160 | | PV-160A-1XL-15 | SD1XL-S-PV | 170H0236/170H0238 |
| | | 200 | | PV-200A-1XL-15 | SD1XL-S-PV | 170H0236/170H0238 |
| | | 125 | | PV-125A-2XL-15 | SD2XL-S-PV | 170H0236/170H0238 |
| 2 | 1500 V d.c. | 160 | Bladed with top indicator | PV-160A-2XL-15 | SD2XL-S-PV | 170H0236/170H0238 |
| | | 200 | | PV-200A-2XL-15 | SD2XL-S-PV | 170H0236/170H0238 |
| | | 250 | | PV-250A-2XL-15 | SD2XL-S-PV | 170H0236/170H0238 |
| | | 250 | | PV-250A-3L-15 | SD3L-S-PV | 170H0236/170H0238 |
| 3 | 1500 V d.c. | 315 | | PV-315A-3L-15 | SD3L-S-PV | 170H0236/170H0238 |
| | | 350 | | PV-350A-3L-15 | SD3L-S-PV | 170H0236/170H0238 |
| | | 355 | | PV-355A-3L-15 | SD3L-S-PV | 170H0236/170H0238 |
| | | 400 | | PV-400A-3L-15 | SD3L-S-PV | 170H0236/170H0238 |
| | | 450 | | PV-450A-3L-15 | SD3L-S-PV | 170H0236/170H0238 |
| 2 | 1500 V d.c. | 500 | | PV-500A-3L-15 | SD3L-S-PV | 170H0236/170H0238 |
| | | 125 | | PV-125A-2XL-U-15 | SD2XL-S-PV | |
| | | 160 | | PV-160A-2XL-U-15 | SD2XL-S-PV | |
| | | 200 | | PV-200A-2XL-U-15 | SD2XL-S-PV | |
| | | 250 | | PV-250A-2XL-U-15 | SD2XL-S-PV | |
| 3 | 1500 V d.c. | 250 | Bladed without top indicator | PV-250A-3L-U-15 | SD3L-S-PV | |
| | | 315 | | PV-315A-3L-U-15 | SD3L-S-PV | |
| | | 350 | | PV-350A-3L-U-15 | SD3L-S-PV | |
| | | 355 | | PV-355A-3L-U-15 | SD3L-S-PV | |
| | | 400 | | PV-400A-3L-U-15 | SD3L-S-PV | |
| 3 | 1500 V d.c. | 450 | | PV-450A-3L-U-15 | SD3L-S-PV | |
| | | 500 | | PV-500A-3L-U-15 | SD3L-S-PV | |





PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Compatible fuse bases and microswitches - 1500 V d.c.- Bolted



| Fuse link body size | Rated voltage | Rated current (Amps) | Fuse type | Catalogue number | Compatible XL Bases | Compatible micro-switches |
|---------------------|-------------------|----------------------|------------------------------------|--------------------|---------------------|---------------------------|
| 01 | 1500 V d.c. | 50 | | PV-50A-01XL-B-15 | | 170H0069 |
| | | 63 | | PV-63A-01XL-B-15 | | 170H0069 |
| | | 80 | | PV-80A-01XL-B-15 | | 170H0069 |
| | | 100 | | PV-100A-01XL-B-15 | | 170H0069 |
| | | 125 | | PV-125A-01XL-B-15 | | 170H0069 |
| 1 | 1500 V d.c. | 100 | | PV-100A-1XL-B-15 | | 170H0069 |
| | | 125 | | PV-125A-1XL-B-15 | | 170H0069 |
| | | 160 | | PV-160A-1XL-B-15 | | 170H0069 |
| | | 200 | | PV-200A-1XL-B-15 | | 170H0069 |
| | | 125 | | PV-125A-2XL-B-15 | | 170H0069 |
| 2 | 1500 V d.c. | 160 | Bolted version with side indicator | PV-160A-2XL-B-15 | | 170H0069 |
| | | 200 | | PV-200A-2XL-B-15 | | 170H0069 |
| | | 250 | | PV-250A-2XL-B-15 | | 170H0069 |
| | | 125 | | PV-125A-2XL-3B-15 | | 170H0069 |
| | | 160 | | PV-160A-2XL-3B-15 | | 170H0069 |
| | | 200 | | PV-200A-2XL-3B-15 | | 170H0069 |
| | | 250 | | PV-250A-2XL-3B-15 | | 170H0069 |
| | | 250 | | PV-250A-3L-B-15 | | 170H0069 |
| | | 315 | | PV-315A-3L-B-15 | | 170H0069 |
| | | 350 | | PV-350A-3L-B-15 | | 170H0069 |
| 3 | 1500 V d.c. | 355 | | PV-355A-3L-B-15 | | 170H0069 |
| | | 400 | | PV-400A-3L-B-15 | | 170H0069 |
| | | 450 | | PV-450A-3L-B-15 | | 170H0069 |
| | | 500 | | PV-500A-3L-B-15 | | 170H0069 |
| | | 125 | | PV-125A-2XL-BU-15 | | |
| 160 | PV-160A-2XL-BU-15 | | | | | |
| 200 | PV-200A-2XL-BU-15 | | | | | |
| 250 | PV-250A-2XL-BU-15 | | | | | |
| 2 | 1500 V d.c. | 125 | | PV-125A-2XL-3BU-15 | | |
| | | 160 | | PV-160A-2XL-3BU-15 | | |
| | | 200 | | PV-200A-2XL-3BU-15 | | |
| | | 250 | | PV-250A-2XL-3BU-15 | | |
| | | 250 | | PV-250A-3L-BU-15 | | |
| 3 | 1500 V d.c. | 315 | Bolted without side indicator | PV-315A-3L-BU-15 | | |
| | | 350 | | PV-350A-3L-BU-15 | | |
| | | 355 | | PV-355A-3L-BU-15 | | |
| | | 400 | | PV-400A-3L-BU-15 | | |
| | | 450 | | PV-450A-3L-BU-15 | | |
| | | 500 | | PV-500A-3L-BU-15 | | |

PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Dimensions (mm)- size 01 Bladed

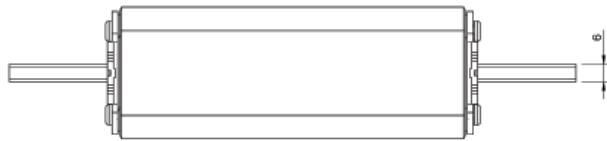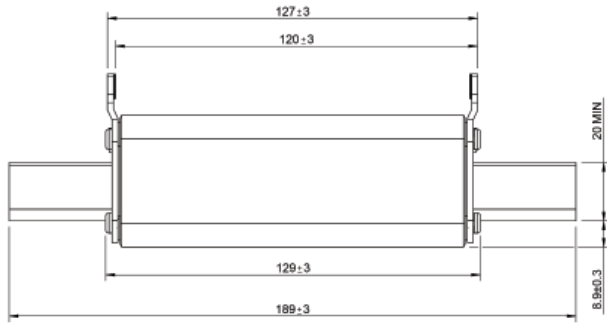


Dimensions (mm) - size 1 Bladed

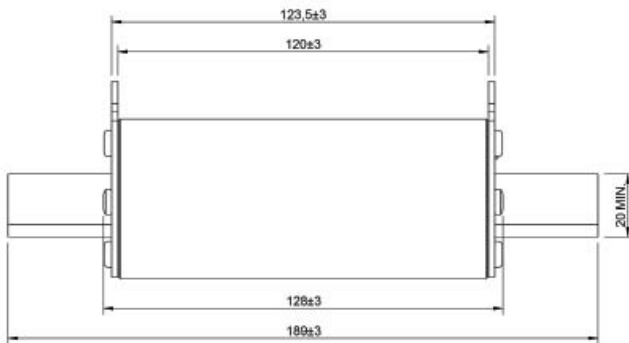


PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Dimensions (mm) - size 2 Bladed

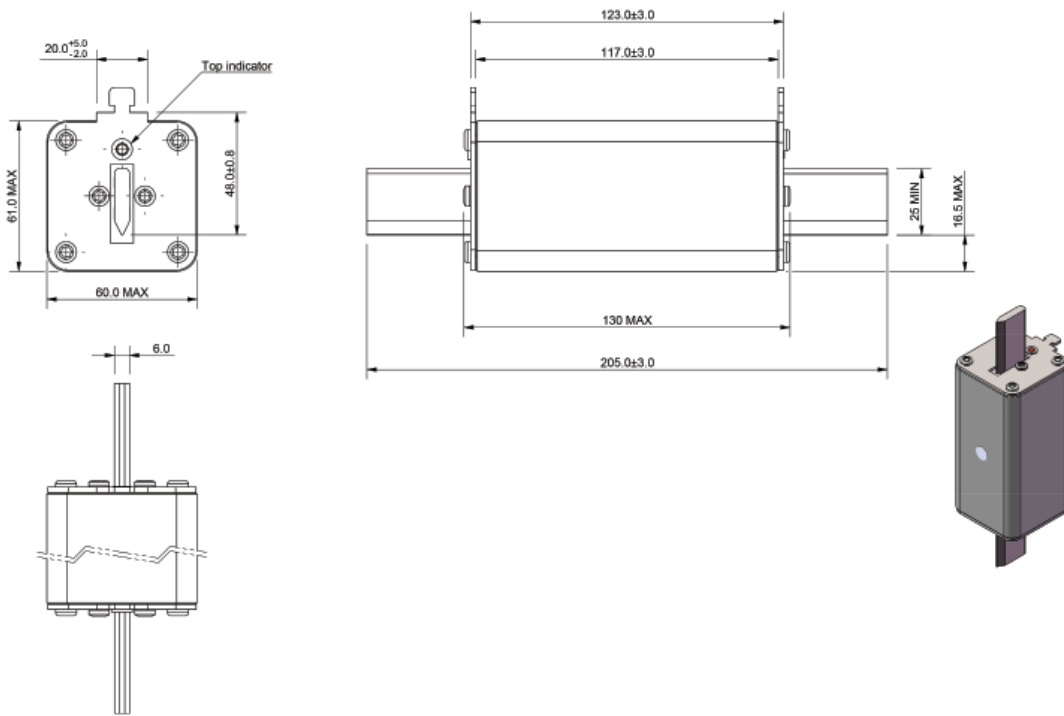


Dimensions (mm) - size 3 Bladed

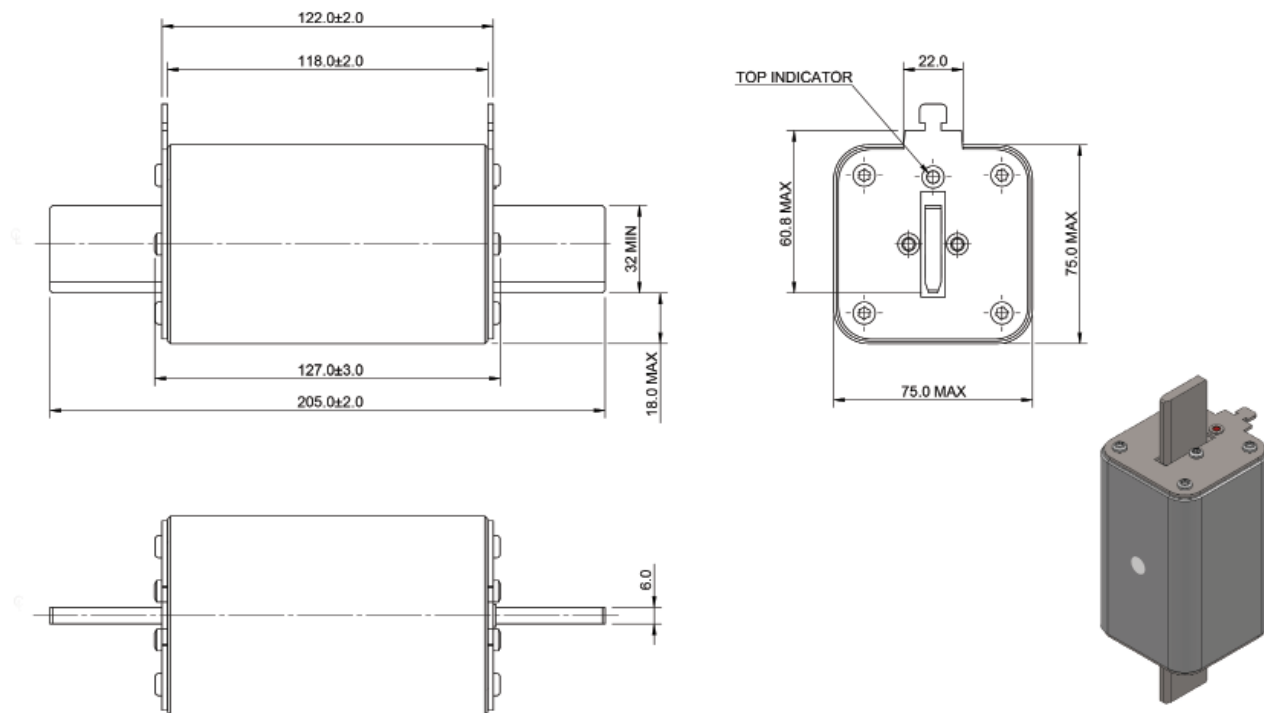

PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Dimensions (mm) - size 01 Bolted

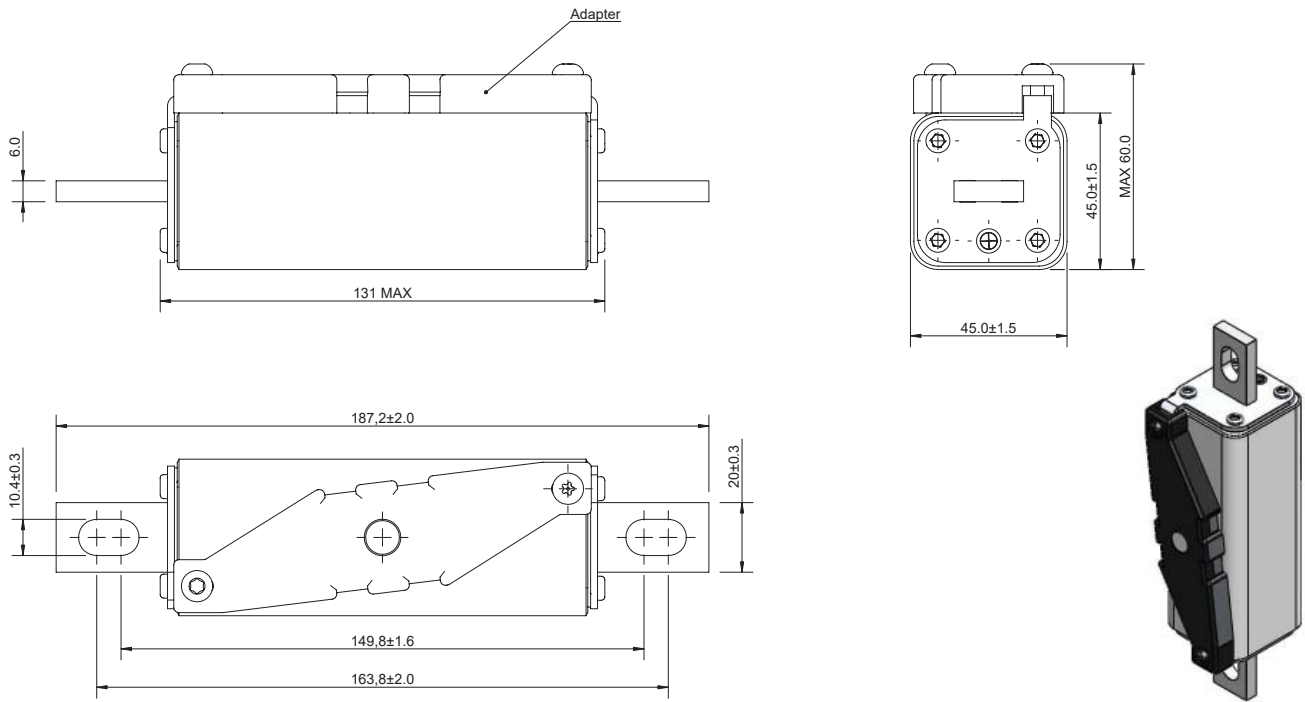

Dimensions (mm) - size 1 Bolted


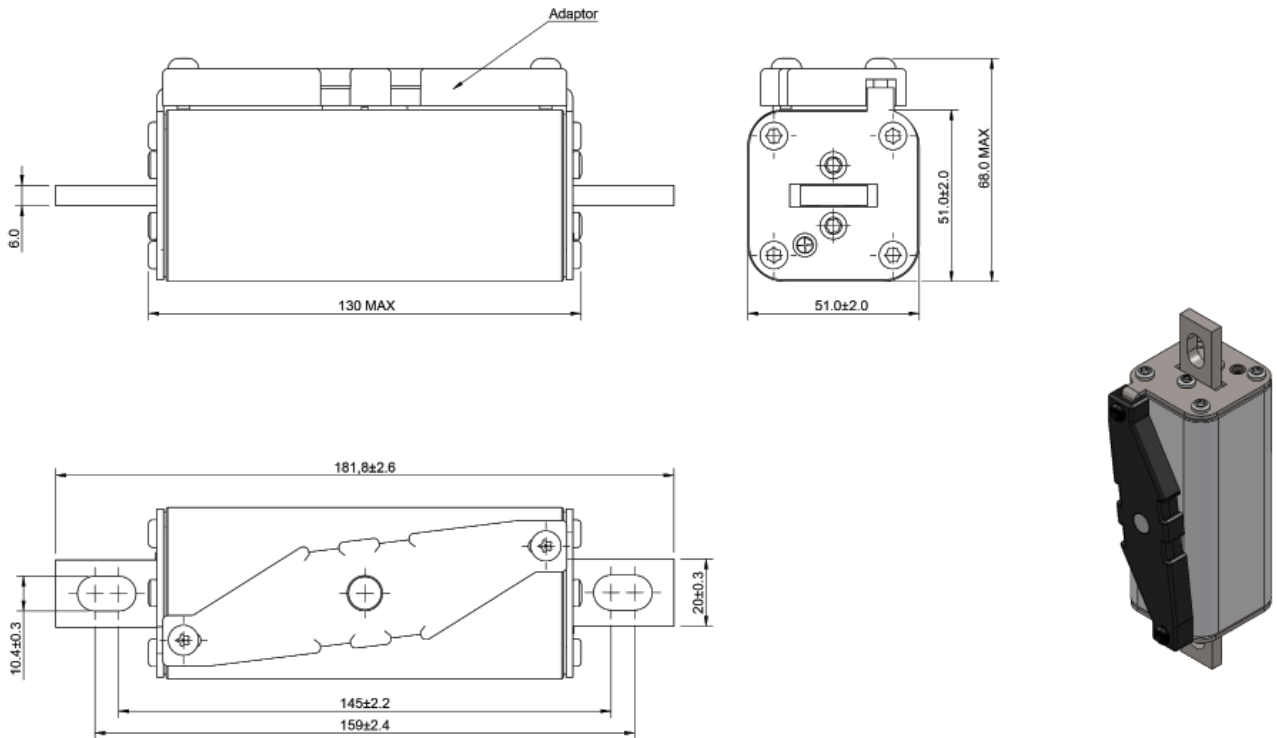



FIG. 4 FUSE XL PV BOLTED

PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Dimensions (mm) - size 2 Bolted

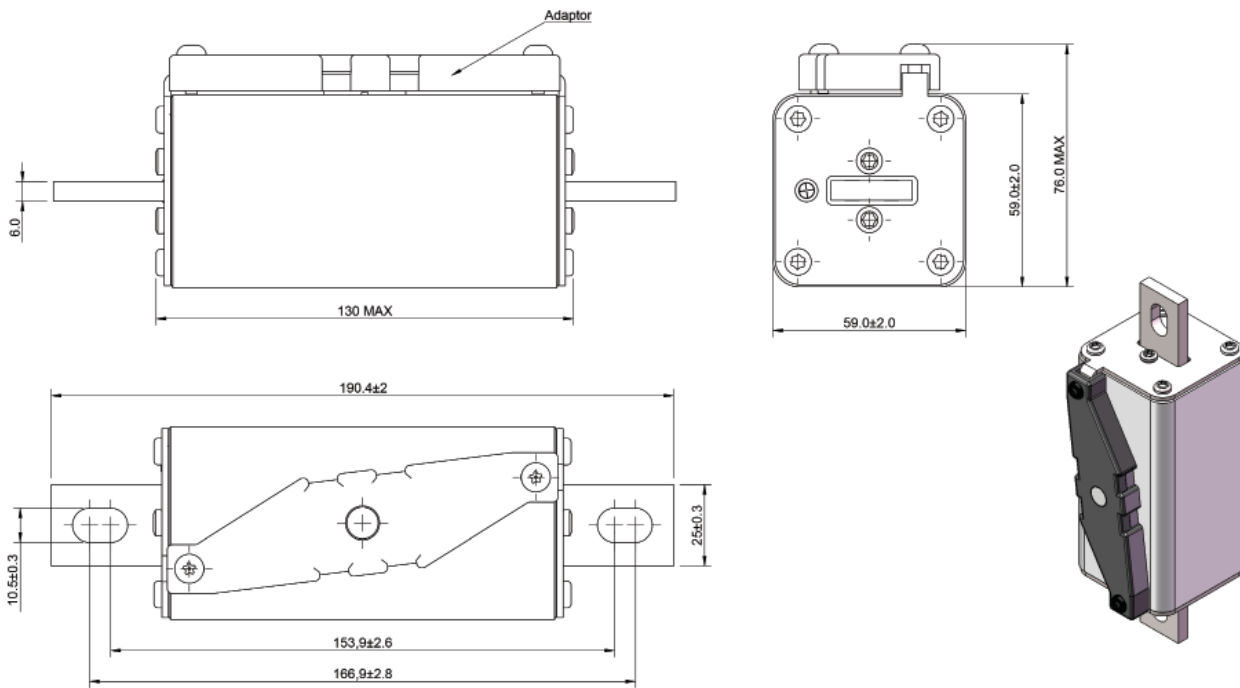

Dimensions (mm) - size 2XL-3B Bolted

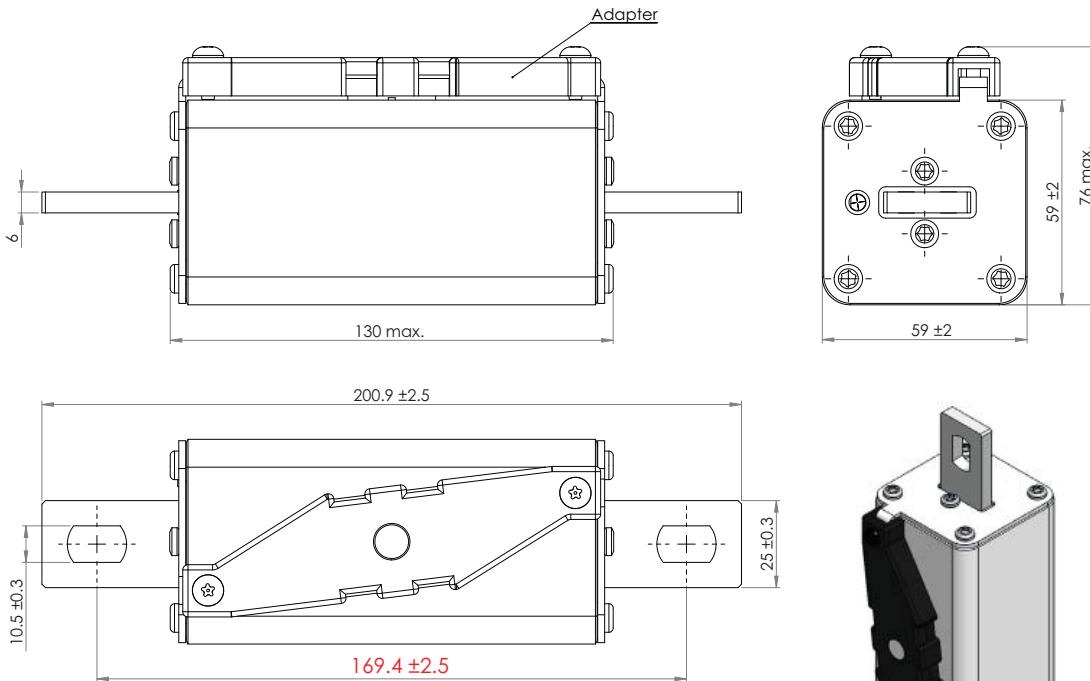

PV-*A-2XL-3B and PV-*A-2XL-3B-15 have revised bolting patterns, which are identical to size 3L bolting pattern. This allows utilisation of both size 2XL and size 3L fuse links without changing the dimensional layout of the inverter, combiners and disconnects.




Mounting dimensions comparison


| 2XL-3B | 3L |
|--------|-------|
| 169.4 | 170.8 |

PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Dimensions (mm) - size 3 Bolted

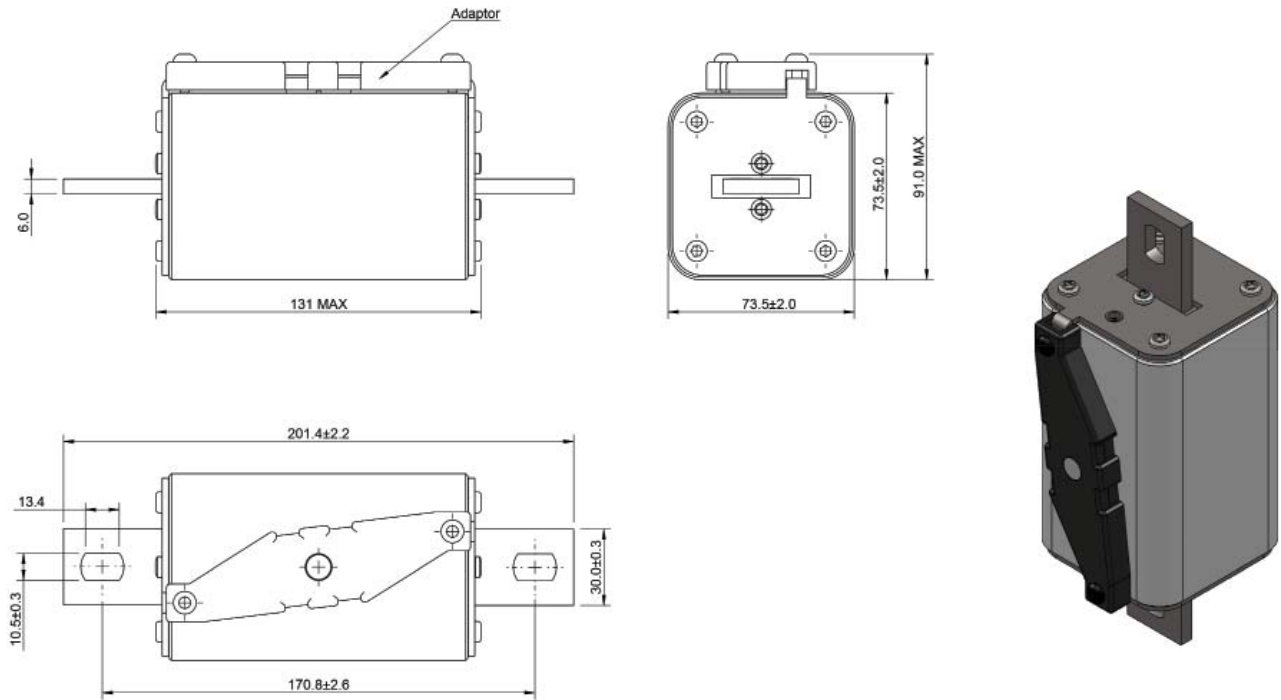


Time-current curve - 1000 V d.c. - 01XL - Bladed and bolted - 63 A to 160 A

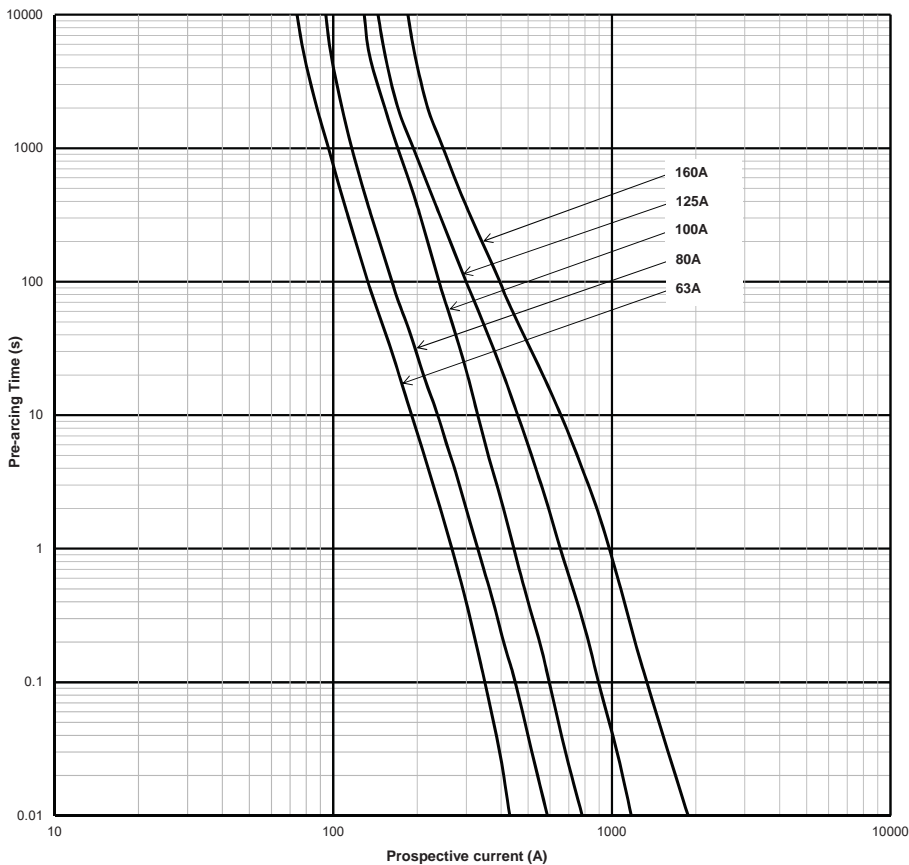


PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Time-current curve - 1000 V d.c. - 2XL - Bladed and bolted - 160 A to 355 A

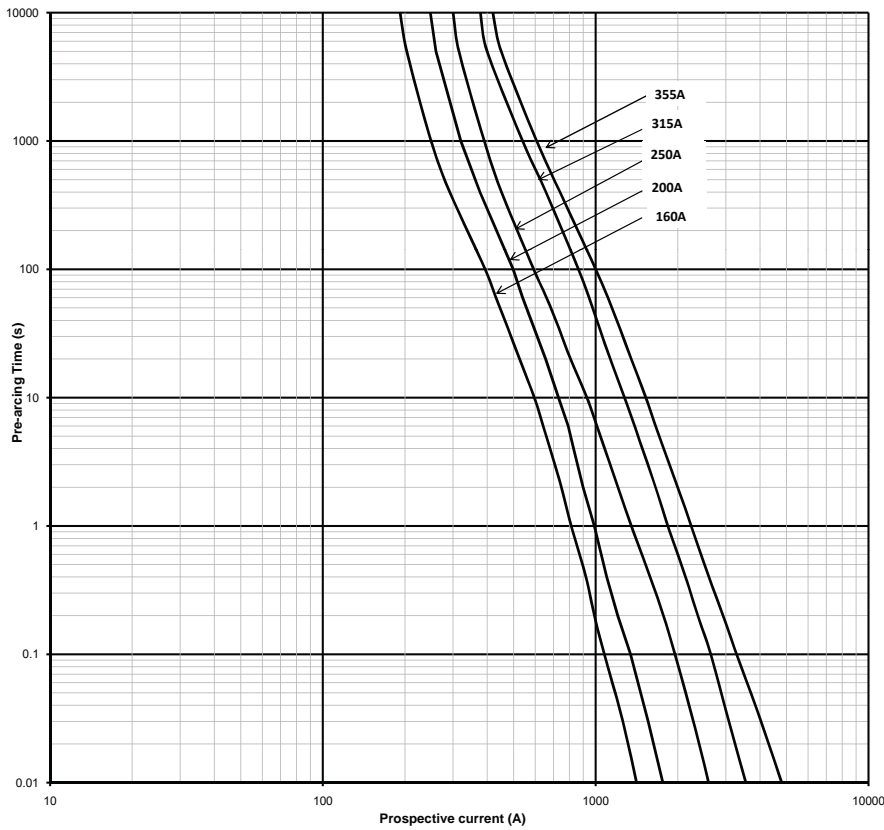


Time-current curve - 1000 V d.c. - 3L - Bladed and bolted - 350 A to 600 A

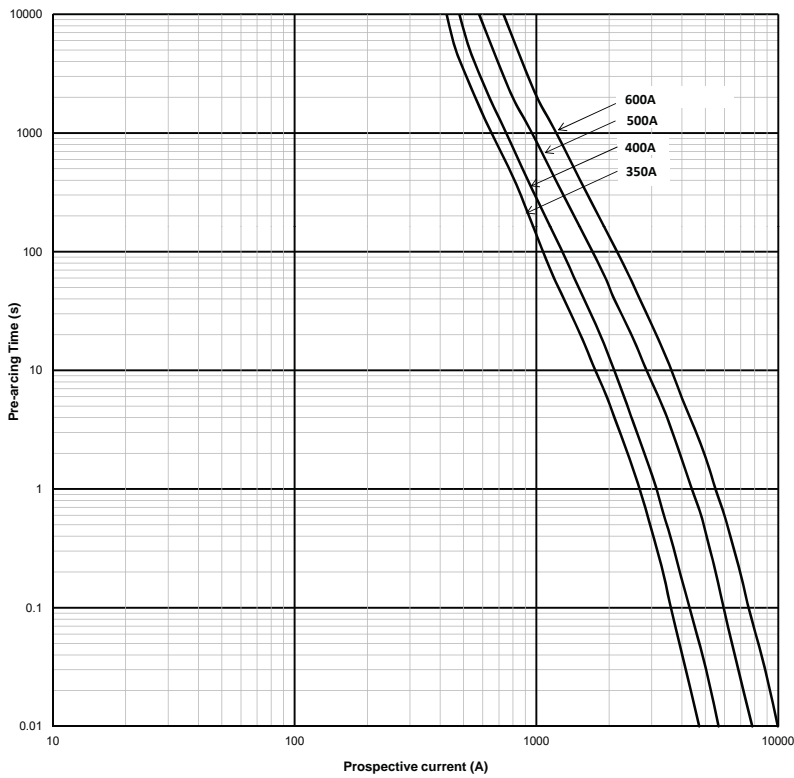


PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Time-current curve - 1500 V d.c. - 01XL - Bladed and bolted - 50 A to 125 A

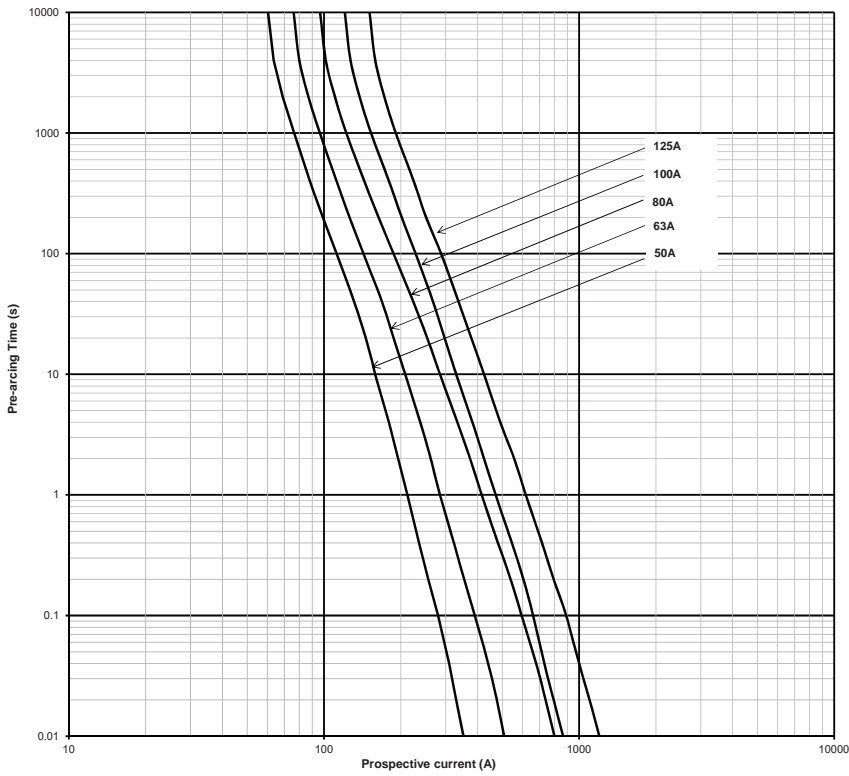


Time-current curve - 1500 V d.c. - 1XL - Bladed and bolted - 100 A to 200 A

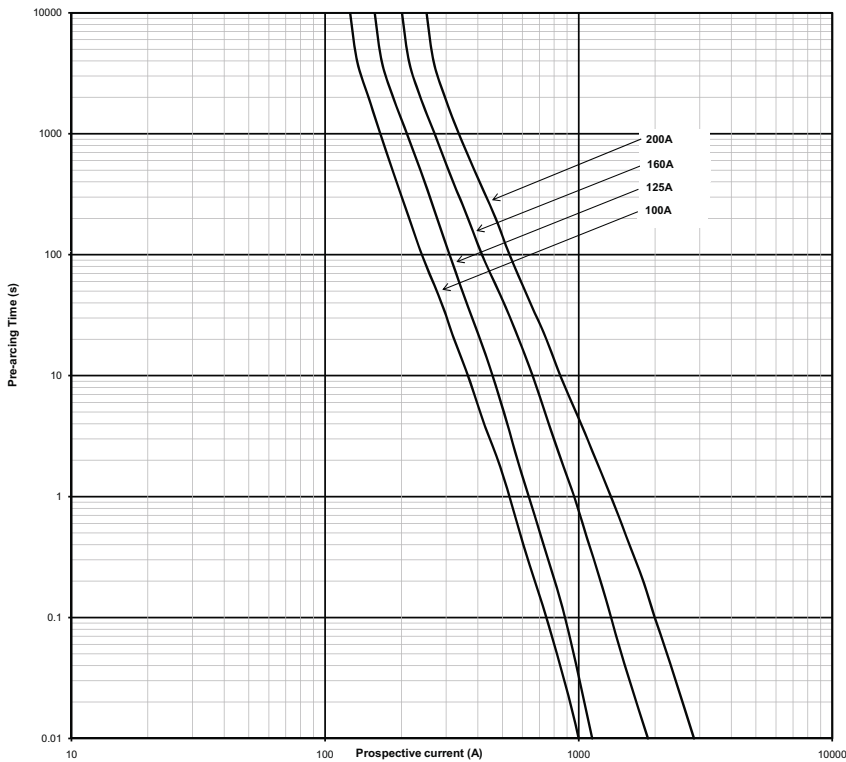


PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Time-current curve - 1500 V d.c. - 2XL - Bladed and bolted - 125 A to 250 A

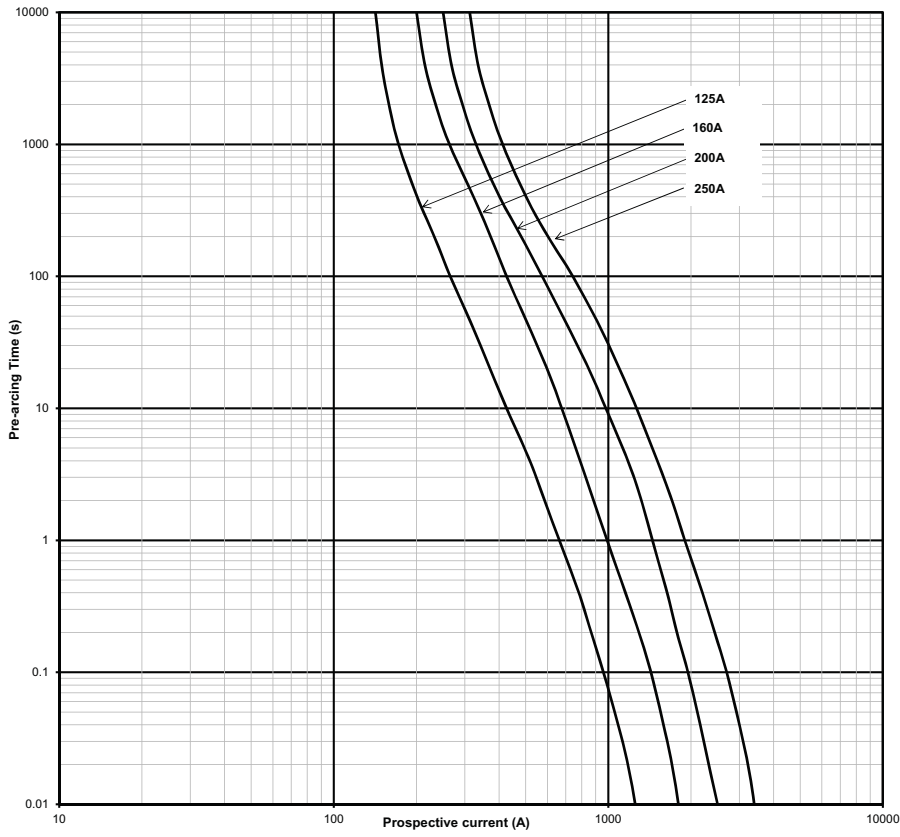


Time-current curve - 1500 V d.c. - 3L - Bladed and bolted - 250 A to 500 A

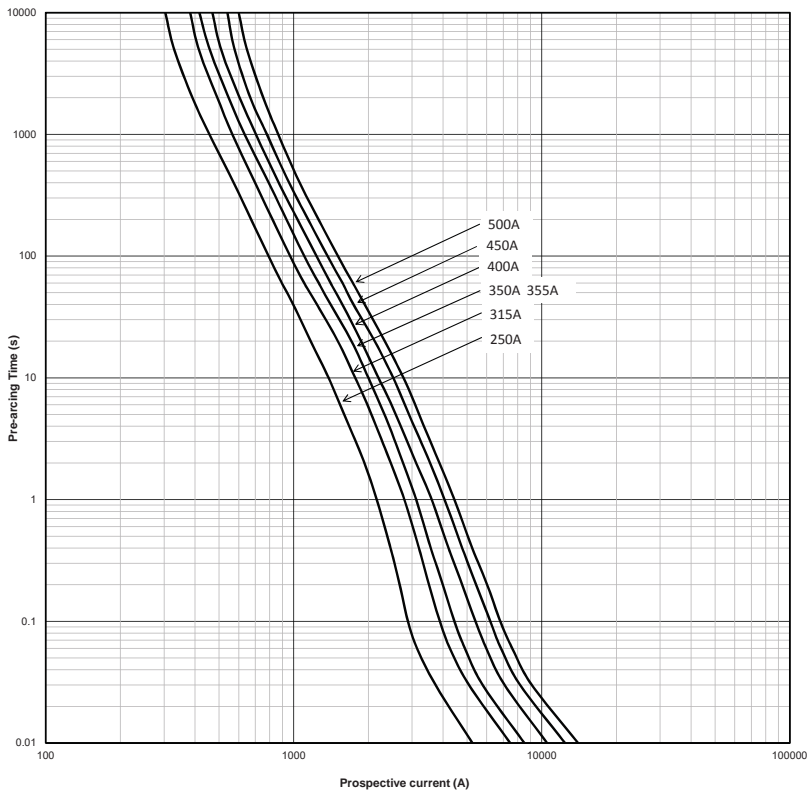

PV-XL, XL Style photovoltaic fuse links, 50 to 600 A, 1000/1500 V d.c.

Temperature derating curve

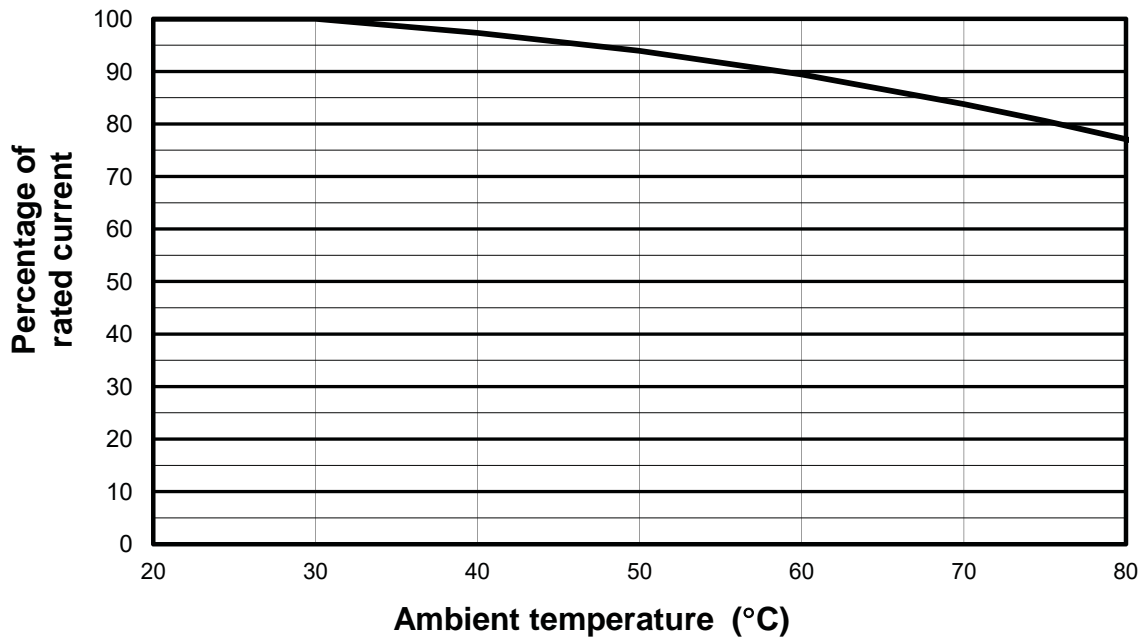

SD-S-PV, XL bases for XL style PV fuse links, 200 to 500 A, 1500 V d.c.

Description

Sizes 1 to 3 XL Fuse bases specifically designed for use with the Bussmann series range of XL PV (Photovoltaic) fuse links.

Technical data

Rated voltage: 1500 V d.c. (IEC)

Rated current: 200, 400 and 500 A

Fuse base size: 1 to 3

Standards / Agency information

IEC 60269-1



UL Listed (file number E348242)

Accessories:

Fuse extraction handle available in sizes 01XL to 3L

Part numbers: FEH1500B

Unit packing: 1

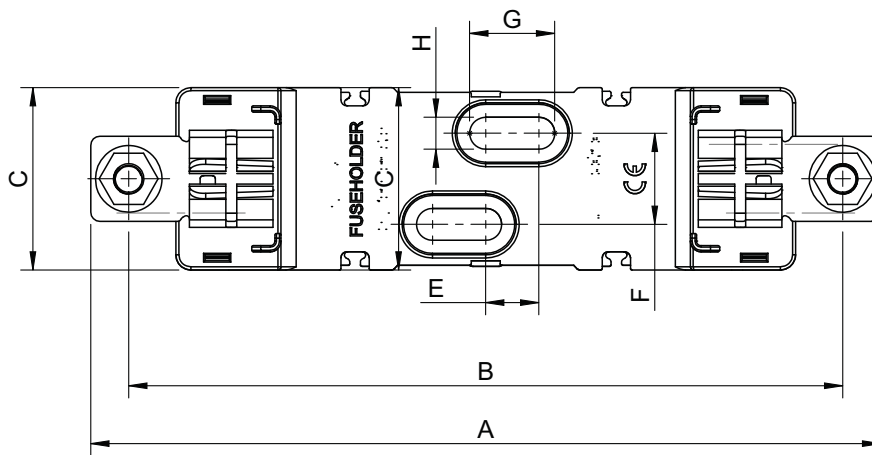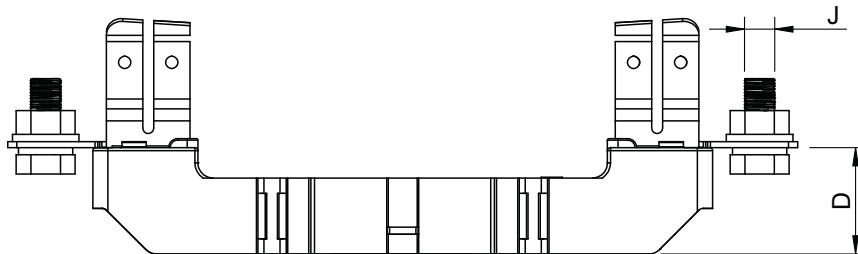

| Catalogue numbers | XL Style fuse link size | Maximum fuse rated current (Amps) | Power acceptance | A | B | C | D | E | F | G | H | J |
|-------------------|-------------------------|-----------------------------------|------------------|-----|-----|----|----|------|----|----|------|-----|
| SD1XL-S-PV | 01XL, 1XL | 200 | 57W | 260 | 235 | 60 | 35 | 17.5 | 30 | 28 | 10.5 | M10 |
| SD2XL-S-PV | 2XL | 400 | 75W | 285 | 260 | 60 | 35 | 17.5 | 30 | 28 | 10.5 | M12 |
| SD3L-S-PV | 3L | 500 | 108W | 300 | 270 | 60 | 35 | 17.5 | 30 | 28 | 10.5 | M12 |

170M, NH Photovoltaic fuse links, 32 A to 400 A, 800 V a.c.

Description

Eaton's Bussmann series NH size 800 V a.c. fuse links are specifically designed to meet the needs of branch circuit and transformer protection in photovoltaic inverter systems. The fuse links are capable of interrupting low overcurrents associated with faulted PV systems (reverse current, multi-array fault).

Technical data

Rated voltage: 800 V a.c.

Rated current: 32 A to 400 A

Breaking capacity: 65 kA

Operating class: gR

Standards / Agency information

UL 248-13 (file number E125085)

IEC 60269-4 (see details below)



Catalogue numbers - Bladed with lugs

| Fuse link body size | Rated voltage | Rated current (Amps) | I ² t (A ² Sec) | | Watts loss (W) | | Catalogue numbers | |
|---------------------|---------------|----------------------|---------------------------------------|---------------------|----------------|------------------|----------------------|--------------------------|
| | | | Pre-arcing | Total at 800 V a.c. | I _n | Bladed with lugs | Compatible fuse base | Compatible microswitches |
| NH1 | 800 V a.c. | 32 | 80 | 2000 | 8 | 170M7350 | SD-1-D | 170H0236 and 170H0238 |
| | | 40 | 185 | 3000 | 9 | 170M7351 | SD-1-D | 170H0236 and 170H0238 |
| | | 50 | 400 | 6000 | 11 | 170M7352 | SD-1-D | 170H0236 and 170H0238 |
| | | 63 | 470 | 7000 | 12 | 170M7353* | SD-1-D | 170H0236 and 170H0238 |
| | | 80 | 640 | 9000 | 15 | 170M7354 | SD-1-D | 170H0236 and 170H0238 |
| | | 100 | 1300 | 17000 | 16 | 170M7355 | SD-1-D | 170H0236 and 170H0238 |
| | | 125 | 2600 | 34000 | 17 | 170M7356* | SD-1-D | 170H0236 and 170H0238 |
| | | 160 | 5200 | 68000 | 27 | 170M7357* | SD-1-D | 170H0236 and 170H0238 |
| | | 200 | 10200 | 140000 | 25 | 170M7358* | SD-1-D | 170H0236 and 170H0238 |
| NH2 | 800 V a.c. | 160 | 4600 | 36800 | 28 | 170M7397 | SD-2-D | 170H0236 and 170H0238 |
| | | 200 | 9500 | 76000 | 32 | 170M7398 | SD-2-D | 170H0236 and 170H0238 |
| | | 250 | 17000 | 136000 | 38 | 170M7399 | SD-2-D | 170H0236 and 170H0238 |
| NH3 | 800 V a.c. | 315 | 32000 | 230000 | 44 | 170M7400* | SD-3-D | 170H0236 and 170H0238 |
| | | 355 | 44500 | 320000 | 46 | 170M7401* | SD-3-D | 170H0236 and 170H0238 |
| | | 400 | 67500 | 480000 | 50 | 170M7402* | SD-3-D | 170H0236 and 170H0238 |

Catalogue numbers - Blade with bolt holes no lugs


| Fuse link body size | Rated voltage | Rated current (Amps) | I ² t (A ² Sec) | | Watts loss (W) | | Catalogue numbers | |
|---------------------|---------------|----------------------|---------------------------------------|---------------------|----------------|-------------------------------|-------------------|--|
| | | | Pre-arcing | Total at 800 V a.c. | I _n | Blade with bolt holes no lugs | | |
| NH1 | 800 V a.c. | 63 | 470 | 7000 | 12 | 170M7353-B* | | |
| | | 80 | 640 | 9000 | 15 | 170M7354-B | | |
| | | 100 | 1300 | 17000 | 16 | 170M7355-B | | |
| | | 125 | 2600 | 34000 | 17 | 170M7356-B* | | |
| | | 160 | 5200 | 68000 | 27 | 170M7357-B* | | |
| | | 200 | 10200 | 140000 | 25 | 170M7358-B* | | |
| NH2 | 800 V a.c. | 160 | 4600 | 36800 | 28 | 170M7397-B | | |
| | | 200 | 9500 | 76000 | 32 | 170M7398-B | | |
| NH3 | 800 V a.c. | 250 | 17000 | 136000 | 38 | 170M7399-B | | |
| | | 315 | 32000 | 230000 | 44 | 170M7400-B* | | |
| NH3 | 800 V a.c. | 355 | 38000 | 270000 | 48 | 170M7401-B* | | |
| | | 400 | 61000 | 430000 | 50 | 170M7402-B* | | |

*UL 248-13 and IEC 60269-4


Data sheet: 10784

170M, NH Photovoltaic fuse links, 32 A to 400 A, 800 V a.c.


Dimensions (mm), NH1 Bladed with lugs

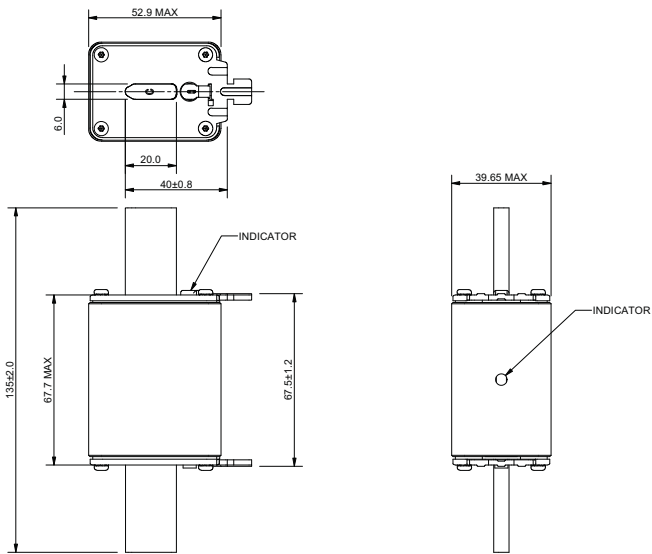

Dimensions (mm), NH2 Bladed with lugs

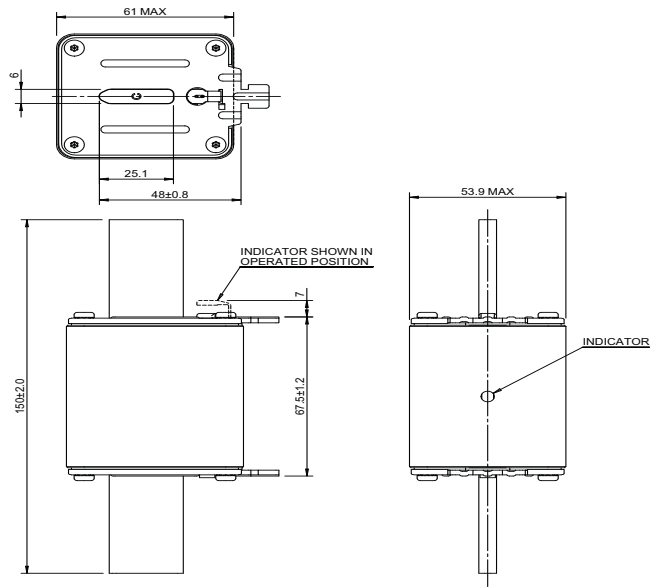


Dimensions (mm), NH3 Bladed with lugs

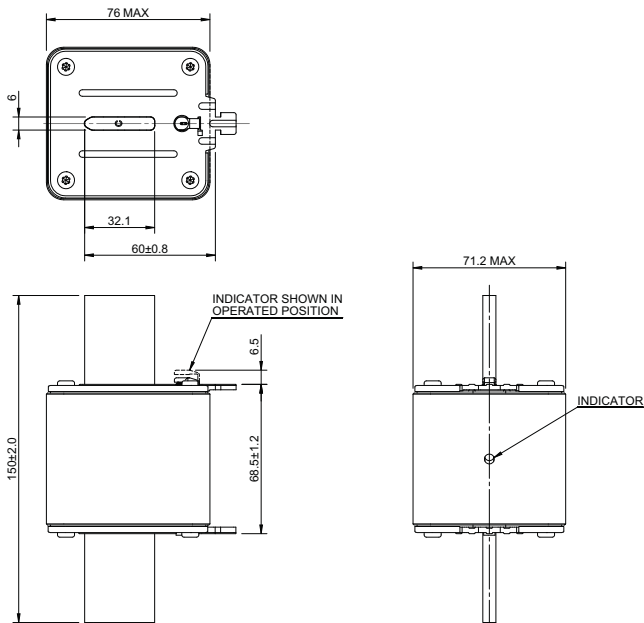


170M, NH Photovoltaic fuse links, 32 A to 400 A, 800 V a.c.


Dimensions (mm), NH1 Bolt holes no lugs

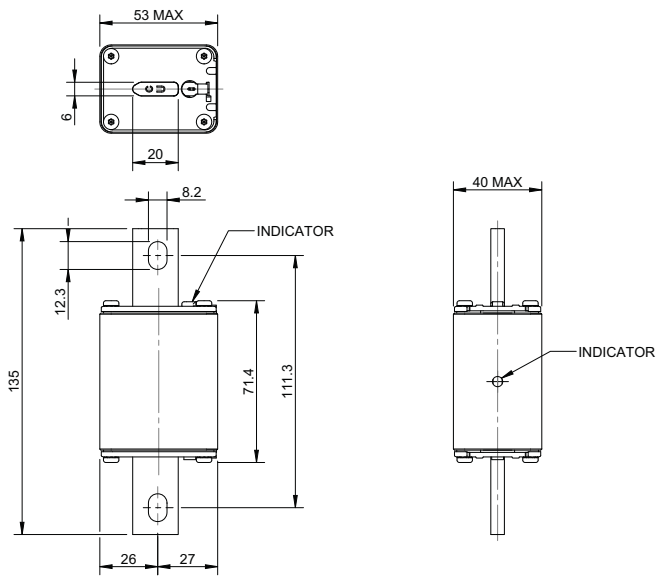

Dimensions (mm), NH2 Bolt holes no lugs

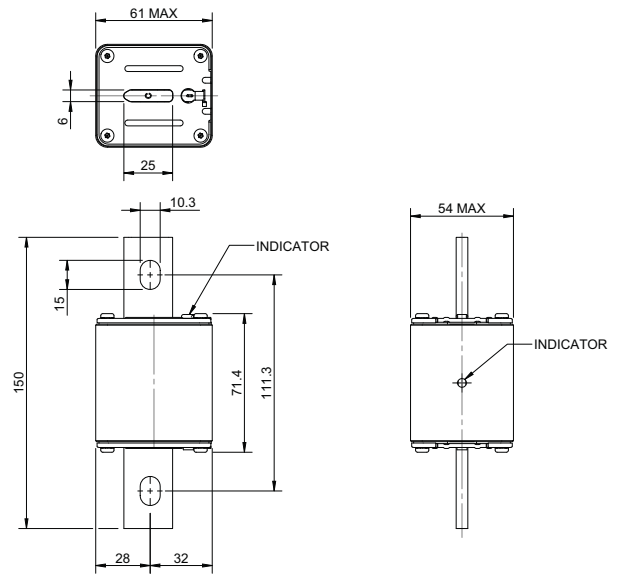


Dimensions (mm), NH3 Bolt holes no lugs

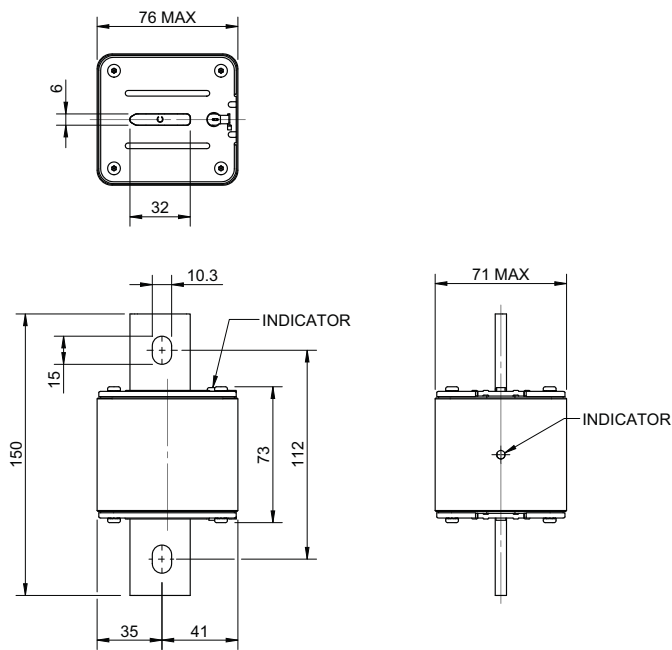


170M, NH Photovoltaic fuse links, 32 A to 400 A, 800 V a.c.

Time-current curve size 1 - 32 A to 200 A

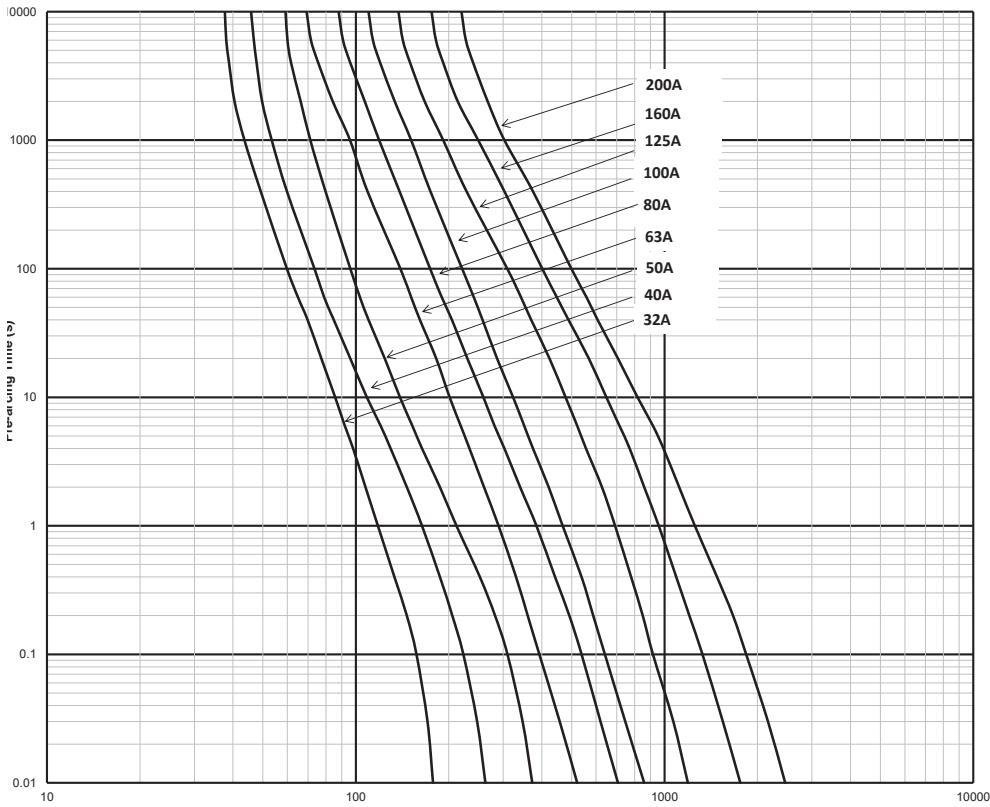


Time-current curve size 2 - 160 A to 250 A

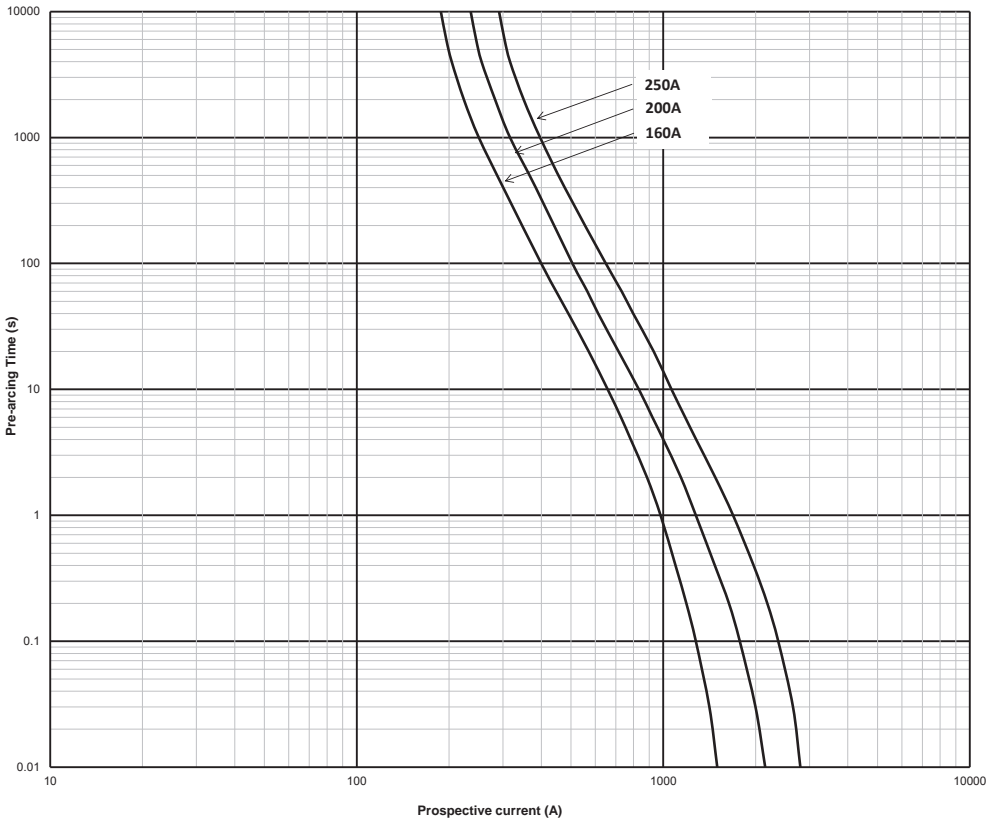


170M, NH Photovoltaic fuse links, 32 A to 400 A, 800 V a.c.

Time-current curve size 3 - 315 A to 400 A

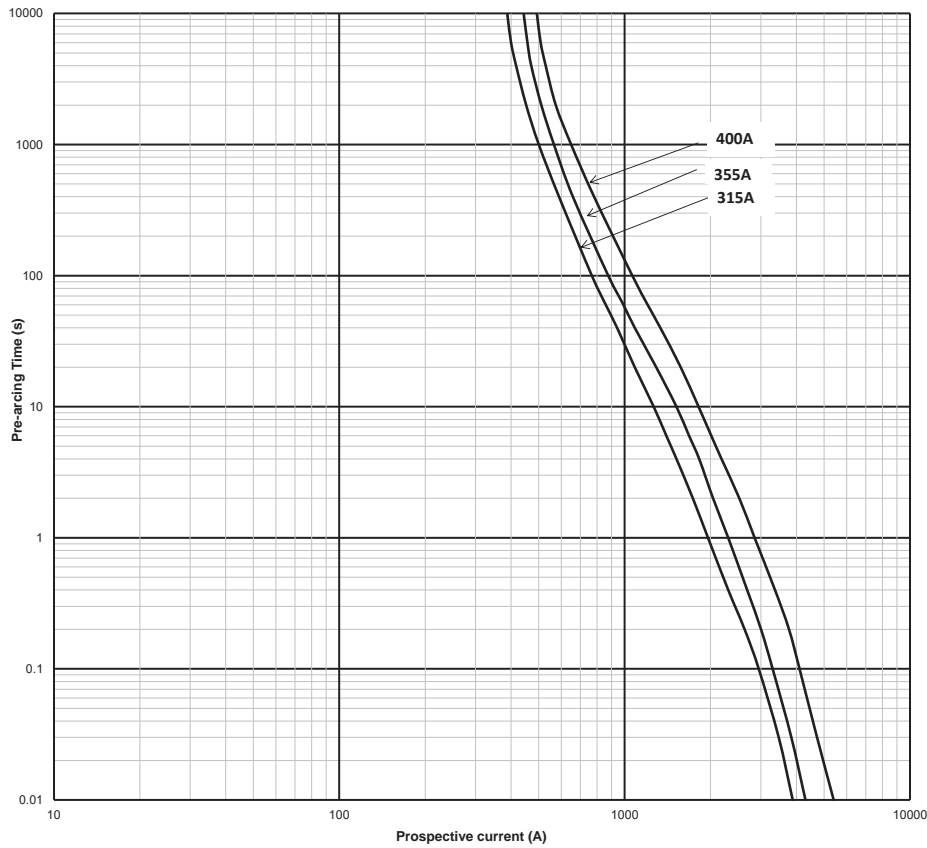

Temperature derating curve

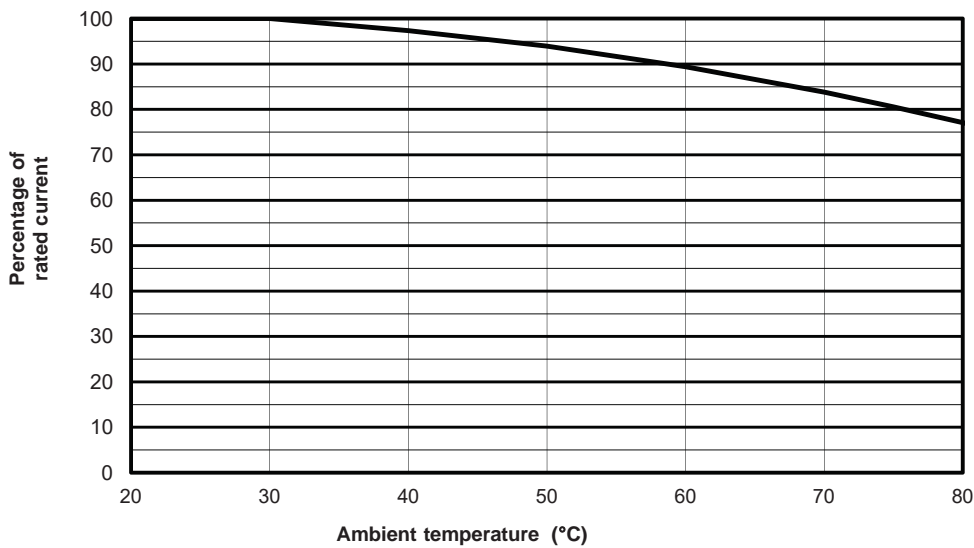

170H Microswitches

Description

Eaton's microswitches are used for remote electrical indication of fuse link operations. All microswitches have one normally open and one normally closed contact.

170H0236 and 170H0238 - Type T Indicator

The indicator is situated on one cover plate with a cover plate tag to accommodate an auxiliary switch. The minimum rated voltage for operating the indicator is 20 V. A special low rated voltage indicator (1.5V) is available on request).

170H0069 - Type K Indicator

The indicator is situated on the fuse link body. It is covered by an adaptor for snap-on mounting of an auxiliary switch. The operating Rated voltage of the indicator is 1.5V. As a matter of safety, the factory mounted adaptor must not be removed from the fuse link.




Compatible fuse links


| Body size | Fixings/Tags | Catalogue number | Rated voltage | Rated current | Microswitches |
|----------------------|--------------------------------|----------------------|---------------|----------------|-----------------------|
| NH Fuse links | | | | | |
| 1 | Bladed with lugs | 170M7350 to 170M7358 | | 32 A to 200 A | 170H0236 and 170H0238 |
| 2 | Bladed with lugs | 170M7397 to 170M7399 | 800 V a.c. | 160 A to 250 A | 170H0236 and 170H0238 |
| 3 | Bladed with lugs | 170M7400 to 170M7402 | | 315 A to 400 A | 170H0236 and 170H0238 |
| | Blade without bolt holes | PV-(amps)ANH1 | | | |
| 1 | Blade with bolt holes | PV-(amps)ANH1-B | 1000 V d.c. | 32 A to 200 A | 170H0236 and 170H238 |
| | Blade with bolt holes and lugs | PV-(amps)ANH1-BL | | | |
| | Blade without bolt holes | PV-(amps)ANH2 | | | |
| 2 | Blade with bolt holes | PV-(amps)ANH2-B | 1000 V d.c. | 160 A to 250 A | 170H0236 and 170H238 |
| | Blade with bolt holes and lugs | PV-(amps)ANH2-BL | | | |
| | Blade without bolt holes | PV-(amps)ANH3 | | | |
| 3 | Blade with bolt holes | PV-(amps)ANH3-B | 1000 V d.c. | 300 A to 400 A | 170H0236 and 170H238 |
| | Blade with bolt holes and lugs | PV-(amps)ANH3-BL | | | |
| XL Fuse links | | | | | |
| 01XL | Bladed | PV-(amps)A-01XL | 1000 V d.c. | 63 A to 160 A | 170H0236 and 170H0238 |
| | Bolted | PV-(amps)A-01XL-B | | | 170H0069 |
| | Bladed | PV-(amps)A-2XL | | | 170H0236 and 170H0238 |
| 2 | Bolted | PV-(amps)A-2XL-B | 1000 V d.c. | 160 A to 355 A | 170H0069 |
| | | PV-(amps)A-2XL-3B | | | |
| 3 | Bladed | PV-(amps)A-3L | 1000 V d.c. | 350 A to 600 A | 170H0236 and 170H0238 |
| | Bolted | PV-(amps)A-3L-B | | | 170H0069 |
| 01 | Bladed with top indicator | PV-(amps)A-01XL-15 | 1500 V d.c. | 50 A to 125 A | 170H0236 and 170H0238 |
| | Bolted with side indicator | PV-(amps)A-01XL-B-15 | | | 170H0069 |
| 1 | Bladed with top indicator | PV-(amps)A-1XL-15 | 1500 V d.c. | 100 A to 200 A | 170H0236 and 170H0238 |
| | Bolted with side indicator | PV-(amps)A-1XL-B-15 | | | 170H0069 |
| | Bladed with top indicator | PV-(amps)A-2XL-15 | | | 170H0236 and 170H0238 |
| 2 | Bolted with side indicator | PV-(amps)A-2XL-B-15 | 1500 V d.c. | 125 A to 250 A | 170H0069 |
| | | PV-(amps)A-2XL-3B-15 | | | |
| | Bladed with top indicator | PV-(amps)A-3L-15 | | | 170H0236 and 170H0238 |
| 3 | Bolted with side indicator | PV-(amps)A-3L-B-15 | 1500 V d.c. | 250 A to 500 A | 170H0069 |

170H Microswitches

Dimensions (mm) - 170H0069

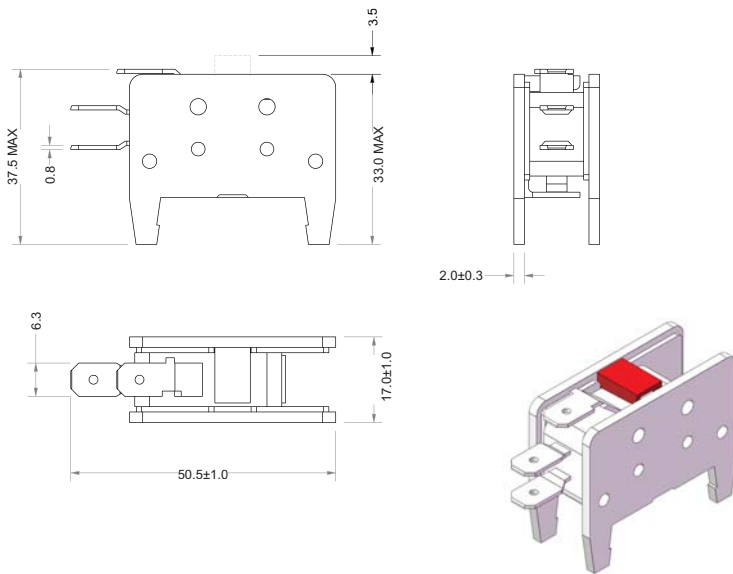

Dimensions (mm) - 170H0236 and 170H0238 for straight tags

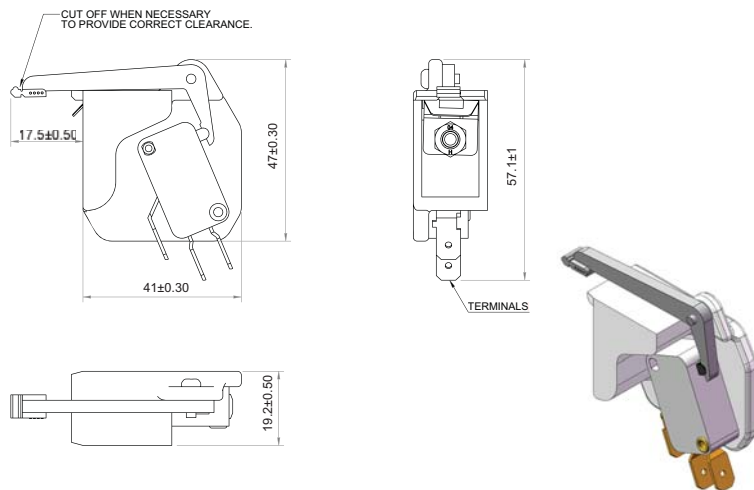

Index

| Catalogue numbers | Pages |
|-------------------|-------|
| 170H0069 | 68 |
| 170H0236 | 68 |
| 170H0238 | 68 |
| 170M | 63 |
| CHPV | 22 |
| CHPV14 | 28 |
| CHPV15H85 | 25 |
| FW14-PCB | 29 |
| PV-3L | 48 |
| PV-A10-1P | 17 |
| PV-A10-2P | 17 |
| PV-A10-2PS | 17 |
| PV-A10F | 17 |
| PV-A10F85L | 23 |
| PV-A10F-CT | 17 |
| PV-A10-T | 17 |
| PV-A14F | 26 |
| PV-A14LF | 30 |
| PV-A14LF10F | 30 |
| PV-A14L-T | 30 |
| PV-AF | 45 |
| PV-ANH | 34 |
| PVM | 15 |
| PV-XL | 48 |
| SD-D-PV | 43 |
| SD-S-PV | 62 |

Contact details

Customer Satisfaction team

Eaton's Customer Satisfaction team is available to answer questions regarding Bussmann series products.

Calls can be made between:

Monday - Friday: 7.30 a.m. - 5.00 p.m. GMT

The Customer Satisfaction team can be reached via:

Phone: 00 44 (0) 1509 882 600

Fax: 00 44 (0) 1509 882 786

Email: GBBURsales@eaton.com

Application engineering

Application Engineering assistance is available to all customers. The Application Engineering team is staffed by university-qualified electrical engineers who are available with technical and application support.

Calls can be made between:

Monday - Thursday: 8.30 a.m. - 4.30 p.m. GMT

Friday: 8.30 a.m. - 4.00 p.m. GMT

Application Engineering can be reached via:

Phone: 00 44 (0) 1509 882 699

Fax: 00 44 (0) 1509 882 794

General technical enquiries:

buletechnical@eaton.com

Enquiries related to High speed fuses:

bulehighspeedtechnical@eaton.com

Eaton's mission is to improve the quality of life and the environment through the use of power management technologies and services. We provide sustainable solutions that help our customers effectively manage electrical, hydraulic, and mechanical power – more safely, more efficiently, and more reliably. Eaton's 2020 revenues were \$17.9 billion, and we sell products to customers in more than 175 countries. We have approximately 92,000 employees.

For more information, visit Eaton.com.

Contact your local Eaton office

Eaton Electrical Products Limited
Unit 1, Hawker Business Park
Melton Road
Burton-on-the-Wolds
LE12 5TH
Leicestershire
United Kingdom
GBBURsales@eaton.com
www.eaton.com

Eaton Industries Manufacturing GmbH
Electrical Sector EMEA
Route de la Longeraie
71110 Morges, Switzerland
Eaton.eu

© 2021 Eaton
All Rights Reserved
PDF only
Publication number: CA135004EN
November 2022

Changes to the products, to the information contained in this document, and to prices are reserved; so are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to Trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

