

xEffect - Industrial Switchgear Range Residual Current Devices FRCmM-NA














Catalog


























Powering Business Worldwide

Residual Current Devices - General Data

Short description of the most important RCD types

Symbol	Description
	Eaton standard. Suitable for outdoor installation (distribution boxes for outdoor installation and building sites) up to -25° C.
	Conditionally surge-current proof (>250 A, 8/20 μs) for general application.
	Type AC: AC current sensitive RCCB
	Type A: AC and pulsating DC current sensitive RCCB, not affected by smooth DC fault currents up to 6 mA
	Type F: AC and pulsating DC current sensitive RCCB, trips also at frequency mixtures (10 Hz, 50 Hz, 1000 Hz), min. 10 ms time-delayed, min. 3 kA surge current proof, higher load capacity with smooth DC fault currents up to 10 mA
	Frequency range up to 20 kHz
	Trips also at frequency mixtures (10 Hz, 50 Hz, 1000 Hz)
	Type B: All-current sensitive RCD switchgear for applications where DC fault currents may occur. Non-selective, non-delayed. Protection against all kinds of fault currents.
	Type B+: All-current sensitive RCD switchgear for applications where DC fault currents may occur. Non-selective, non-delayed. Protection against all kinds of fault currents. Provides enhanced fire safety.
	RCD of type G (min 10 ms time delay) surge current-proof up to 3 kA. For system components where protection against unwanted tripping is needed to avoid personal injury and damage to property. Also for systems involving long lines with high capacitive reactance. Some versions are sensitive to pulsating DC. Some versions are available in all-current sensitive design.
	RCD of type S (selective, min 40 ms time delay) surge current-proof up to 5 kA. Mainly used as main switch, as well as in combination with surge arresters. This is the only RCD suitable for series connection with other types if the rated tripping current of the downstream RCD does not exceed one third of the rated tripping current of the device of type S. Some versions are sensitive to pulsating DC. Some versions are available in all-current sensitive design.

Kind of residual current and correct use of RCD Types

Kind of current	Current profile	Correct use / application field of RCCB types						Tripping current
		AC	A	F	B	/ B+		
Sinusoidal AC residual current							0.5 to 1.0 $I_{\Delta n}$	
Pulsating DC residual current (positive or negative half-wave)		-					0.35 to 1.4 $I_{\Delta n}$	
Cut half-wave current		-					Lead angle 90°: 0.25 to 1.4 $I_{\Delta n}$ Lead angle 135°: 0.11 to 1.4 $I_{\Delta n}$	
Half-wave with smooth DC current of 6 mA		-					max. 1.4 $I_{\Delta n}$ + 6 mA	
Half-wave with smooth DC current of 10 mA		-	-				max. 1.4 $I_{\Delta n}$ + 10 mA	
Smooth DC current		-	-	-			0.5 to 2.0 $I_{\Delta n}$	

Tripping time

Break time and non-actuating time for alternating residual currents (r.m.s. values) for type AC and A RCCB


Classification	$I_{\Delta n}$ mA		$I_{\Delta n}$	$2xI_{\Delta n}$	$5xI_{\Delta n}$	$5 x I_{\Delta n}$ or 0.25A	500A
Standard RCD Conditionally surge current-proof 250 A	≤30	Max. tripping time (s)	0.3	0.15		0.04	0.04
Standard RCD Conditionally surge current-proof 250 A	>30	Max. tripping time (s)	0.3	0.15	0.04		0.04
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	30	Min. non actuating time(s) Max. tripping time (s)	0.01 0.3	0.01 0.15		0.01 0.04	0.01 0.04
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	>30	Min. non actuating time(s) Max. tripping time (s)	0.01 0.3	0.01 0.15	0.01 0.04		0.01 0.04
RCCB Type S (Selective) Surge current-proof 5 kA	>30	Min. non actuating time(s) Max. tripping time (s)	0.13 0.5	0.06 0.2	0.05 0.15		0.04 0.15

Break time for half-wave pulsating residual currents (r.m.s. values) for type A RCCB

Classification	$I_{\Delta n}$ mA		$1.4xI_{\Delta n}$	$2xI_{\Delta n}$	$2.8xI_{\Delta n}$	$4xI_{\Delta n}$	$7 x I_{\Delta n}$ 0.35 A	0.5 A	350A
Standard RCD Conditionally surge current-proof 250 A	<30	Max. tripping time (s)		0.3		0.15		0.04	0.04
Standard RCD Conditionally surge current-proof 250 A	30	Max. tripping time (s)	0.3		0.15		0.04		0.04
Standard RCD Conditionally surge current-proof 250 A	>30	Max. tripping time (s)	0.3		0.15		0.04		0.04
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	30	Max. tripping time (s)	0.3		0.15		0.04		0.04
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	>30	Max. tripping time (s)	0.3		0.15		0.04		0.04
RCCB Type S (Selective) Surge current-proof 5 kA	>30	Max. tripping time (s)	0.5		0.2		0.15		0.15

Tripping Characteristics (IEC/EN 61008)

Tripping characteristics, tripping time range and selectivity of instantaneous, surge current-proof „G“ and surge current-proof - selective „S“ residual current devices.

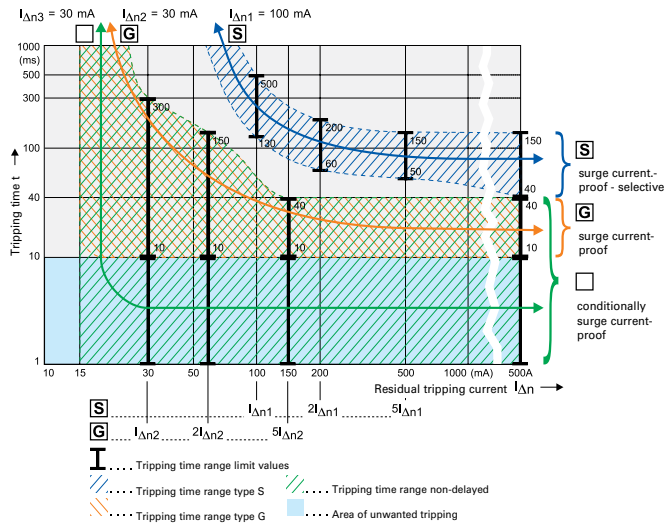

IEC 60364-4-41 deals with additional protection: The use of RCDs with a rated residual operating current not exceeding 30 mA, is recognized in a.c. systems as additional protection in the event of failure of the provision for basic protection and/or the provision for fault protection or carelessness by users.

This means when using RCDs for fault current/residual current protection two RCDs must be connected in series.


Testing:

RCDs with tripping time delay (Types -G and -S) may be function tested with conventional testing equipment which must be set according to the instructions for operation of the testing device. Due to reasons inherent in the measuring process, the tripping time determined in this way may be longer than expected in accordance with the specifications of the manufacturer of the measuring instrument.

However, the device is ok if the result of measurement is within the time range specified by the manufacturer of the measuring instrument.

Applications with frequency converters:


Due to the currents flowing off through the filters (designated IF), the sum of currents through the RCD is not exactly zero, which causes unwanted tripping.

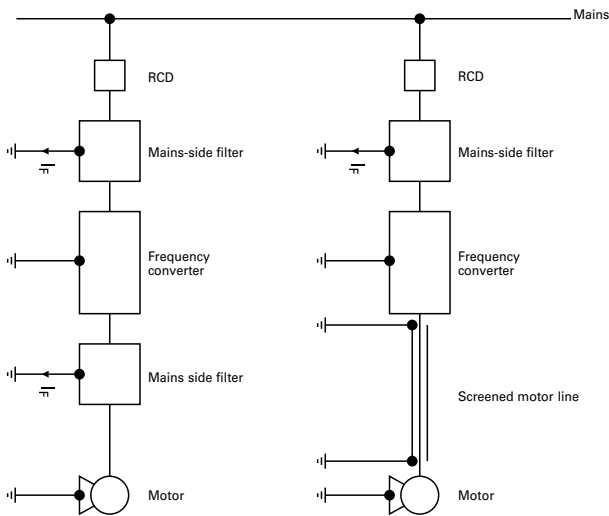

Frequency converters are used in a wide variety of systems and equipment requiring variable speed, such as lifts, escalators, conveyor belts, and large washing machines. Using them for such purposes in circuits with conventional residual current devices causes frequent problems with unwanted tripping.

The technical root cause of this phenomenon is the following: Fast switching operations involving high voltages cause high interference levels which propagate through the lines on the one hand, and in the form of interfering radiation on the other. In order to eliminate this problem, a mains-side filter (also referred to as input filter or EMC-filter) is connected between the RCD and frequency converter. The anti-interference capacitors in the filters produce discharge currents against earth which may cause unwanted tripping of the RCD due to the apparent residual currents. Connecting a filter on the output side between frequency converter and 3-phase AC motor results in the same behaviour.

Tripping characteristic

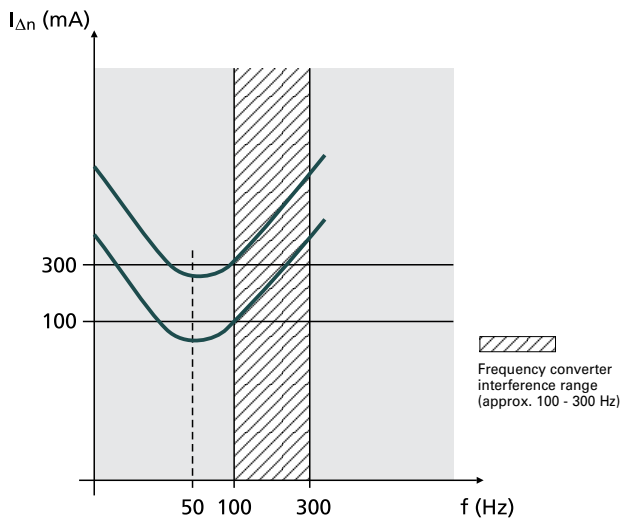

This sample tripping characteristic of a 100 mA RCD and a 300 mA RCD shows the following: In the frequency range around 50 Hz, the RCDs trip as required (50 - 100 % of the indicated $I_{\Delta n}$). In the range shown hatched in the diagram, i. e. from approx. 100 to 300 Hz, unwanted tripping occurs frequently due to the use of frequency converters. Type F RCCBs are designed to reliably sense higher frequency residual currents, which leads to an enormous increase in the reliability and availability of electrical systems.

Therefore, we recommend to use RCDs designed for applications with frequency converter!

These special residual current devices can be recognised by an extension of the type designation („-F“). They meet the requirements of compatibility between RCDs and frequency converters with respect to unwanted tripping.

Eaton stands for highest availability of your system also in applications where frequency drives are used. Therefore a full suite of Type F RCCBs (mechanical and digital assisted) are available in all feasible ratings to assist you in your application needs.

Our RCDs of type „-F“ are characterized by:

- Improved capabilities of reliably sensing residual currents up to 1 kHz
- Improved capabilities of withstanding 10 mA DC offset
- 10 ms short time delay minimum (G/F)
- Surge current proofness of 3 kA (G/F) and 5kA (S/F)

SG49612



Description

- Line voltage independent RCCB for fault protection, additional protection as well as fire protection
- Certified according UL 1053 and IEC/EN 61008 to be used in applications worldwide
- Comprehensive range of RCCBs available to fulfil most application needs
- Fault current tripping indicator enables to determine the tripping reason
- Comprehensive accessories available
- Suitable to be put into rail rolling stock applications due to additional certification

$I_n/I_{\Delta n}$
(A)

Type
Designation

Article No.

Units per
package

Type A

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A 

SG48612



2-poles

25/0.03	FRCmM-25/2/003-A-NA	167113	1/60
25/0.3	FRCmM-25/2/03-A-NA	167116	1/60
40/0.03	FRCmM-40/2/003-A-NA	167114	1/60
40/0.3	FRCmM-40/2/03-A-NA	167117	1/60
63/0.03	FRCmM-63/2/003-A-NA	167115	1/60
63/0.3	FRCmM-63/2/03-A-NA	167118	1/60

SG49612



4-poles

25/0.03	FRCmM-25/4/003-A-NA	167125	1/30
25/0.3	FRCmM-25/4/03-A-NA	167104	1/30
40/0.03	FRCmM-40/4/003-A-NA	167102	1/30
40/0.3	FRCmM-40/4/03-A-NA	167105	1/30
63/0.03	FRCmM-63/4/003-A-NA	167103	1/30
63/0.3	FRCmM-63/4/03-A-NA	167106	1/30

Type G/A

Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A (ÖVE E 8601) 

SG48612



2-poles

25/0.03	FRCmM-25/2/003-G/A-NA	167119	1/60
25/0.3	FRCmM-25/2/03-G/A-NA	167122	1/60
40/0.03	FRCmM-40/2/003-G/A-NA	167120	1/60
40/0.3	FRCmM-40/2/03-G/A-NA	167123	1/60
63/0.03	FRCmM-63/2/003-G/A-NA	167121	1/60
63/0.3	FRCmM-63/2/03-G/A-NA	167124	1/60

SG49612



4-poles

25/0.03	FRCmM-25/4/003-G/A-NA	167107	1/30
25/0.3	FRCmM-25/4/03-G/A-NA	167110	1/30
40/0.03	FRCmM-40/4/003-G/A-NA	167108	1/30
40/0.3	FRCmM-40/4/03-G/A-NA	167111	1/30
63/0.03	FRCmM-63/4/003-G/A-NA	167109	1/30
63/0.3	FRCmM-63/4/03-G/A-NA	167112	1/30

Specifications | Residual Current Devices FRCmM-NA

Description

Design

- Residual Current Circuit Breakers (RCCBs) for worldwide industrial and commercial applications
- Designed and suitable to be put into an xEffect-System
- Twin-purpose terminal (lift/open-mouthed) above and below
- Contact position indicator red - green
- Tripping indicator white - blue
- Additional safety due:
 - possibility to seal the toggle
 - possibility to lock the toggle
- The device functions irrespective of the position of installation

Accessories

- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Auxiliary contacts to be mounted onto the device:
 - Universal tripping signal switch, also suitable for FAZ, FRBmM-1N
 - Auxiliary switch Z-HK can be mounted subsequently

Additional information for the application

- Delayed types suitable for being used with standard fluorescent tubes with or without electronical ballast
 - 30 mA-RCCBs: 30 units per phase conductor
 - 100 mA RCCBs: 90 units per phase conductor

Note: Depending on the fluorescent lamp manufacturer, partly more units possible. Symmetrical allocation of the fluorescent lamp ballasts on all phases favorably. Please still consider the technical data provided by the manufacturer of the lamps.
- Tripping is line voltage independent (VI) and therefore suitable for all BA-classes.

The RCD is suitable for fault protection, additional protection, fire protection within the regulations of the applicable wiring regulations (e.g.: IEC/EN 60364)
- The 4-pole device can also be used for 3-pole and 2 pole applications. Please refer to published connection diagrams

Test Button

- The test button "T" must be pressed once every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven.

Under special conditions (e.g.: damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltage due to switching of equipment and/or atmospheric discharges, portable equipment, ...), it's recommended to test in monthly intervals. Regulations according IEC/EN 60364 or wiring regulations still apply.
- The test button "T" tests the function of the RCCB itself. This test does not measure a "suitable" fault loop or if requirements of such are kept. Testing your fault loop (earth rod resistance, continuity of fault loop,...) requires special tests performed separately.
- **Type A** These types are capable of sensing pulsating residual currents and are not negatively affected by a DC overlay of up to 6 mA. These devices are also available as:
 - G/A short time delayed devices which are surge current proof up to 3 kA. These devices enable a reliable and safe installation with increased system availability
- **Type G**

G Types offer a 10 ms time delayed tripping curve and surge current proof capabilities up to 3 kA and are highly recommended to be used for applications and installations where system availability is an important factor.

Since "G" states a tripping curve and not a sensitivity, these devices can also be found as:

 - A Type RCCBs (-G/A-NA)

Accessories:

Auxiliary contact to be mounted on the left side *)	Z-HK	248432
Auxiliary contact to be mounted on the right side	Z-NHK	248434
Automatic restarting device *)	Z-FW/LP	248296
	Z-FW-LPD	265244
Remote control unit *)	Z-FW-MO	284730
Sets (Device + remote control unit) *)	Z-FW-LP/MO	290171
	Z-FW-LPD/MO	290172
IΔn testing module *)	Z-FW/003	248298
	Z-FW/010	248299
	Z-FW/030	248300
	Z-RC/AK-4TE	101062
Terminal cover 4-poles *)	Z-RC/AK-4TE	101062

*) without UL certification


Technical Data

		FRCmM-NA
Electrical according to IEC/EN 61008		
Design according to		IEC/EN 61008, ÖVE E 8601
Classified according to		IEC 61373, EN 45545-2
Current test marks as printed onto the device		
Tripping		instantaneous
Type G		10 ms delay at 50 Hz
Rated voltage	U_n	240/415 V; 50/60 Hz
Limits operation voltage test circuit		
2-poles		196 - 264 V~
4-poles 30 mA		196 - 264 V~
4-poles 300 mA		196 - 456 V~
Rated tripping current	$I_{\Delta n}$	30, 300 mA
Sensitivity		AC and pulsating DC
Rated insulation voltage	U_i	440 V
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50 μ s)
Rated short circuit capacity	I_{cn}	10 kA with back-up fuse
Peak withstand current		
Type A		250 A (8/20 μ s) surge current-proof
Type G/A		3 kA (8/20 μ s) surge current-proof, 10 ms delay
Rated breaking capacity	I_m	
or rated fault breaking capacity	$I_{\Delta m}$	
$I_n = 25-40$ A		500 A
$I_n = 63$ A		630 A
Endurance		
electrical components		$\geq 4,000$ operating cycles
mechanical components		$\geq 10,000$ operating cycles
Electrical according to UL1053		
Design according to		UL1053
Current test marks as printed onto the device		
Tripping		instantaneous
Type G		8 ms delay at 60 Hz
Rated voltage	U_n	480Y/277 V, 60 Hz
Limits operation voltage test circuit		
2-poles		196 - 305 V~
4-poles 30 mA		196 - 305 V~
4-poles 300 mA		196 - 528 V~
Pick-up current		
30 mA Types		22 mA
300 mA Types		200 mA
Sensitivity		AC and pulsating DC
Overvoltage tested		530 V
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50 μ s)
Rated short circuit capacity	I_{cn}	5 kA acc. to CSA
Rated breaking capacity	I_m	
or rated fault breaking capacity	$I_{\Delta m}$	
$I_n = 25-40$ A		500 A
$I_n = 63$ A		630 A
Endurance		
electrical components		$\geq 4,000$ operating cycles
mechanical components		$\geq 10,000$ operating cycles


Mechanical

Frame size	45 mm
Device height	80 mm
Device width	35 mm (2MU), 70 mm (4MU)
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Degree of protection in moisture-proof enclosure	IP54
Upper and lower terminals	lift terminals
Terminal protection	finger and hand touch safe, DGVV VS3, EN 50274
Terminal capacity	1.5 - 35 mm ² single wire 2 x 16 mm ² multi wire
Terminal screw	M5 (with slotted screw acc. to EN ISO 4757-Z2, Pozidriv PZ2)
Operation temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC/EN 61008
Humidity	5-95 %
Pollution degree	2
Contact position indicator	red / green
Tripping indicator	white / blue

Connection diagram




Dimensions (mm)

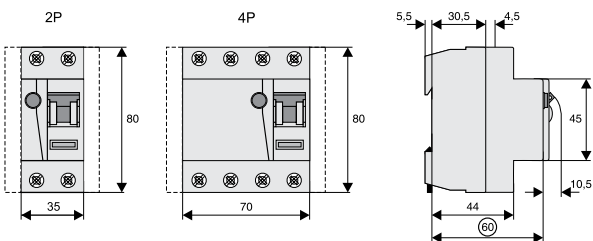

Correct connection


2-poles acc. to IEC61008/UL1053

30, 300mA Types:




4-poles acc. to IEC61008

30mA Types:

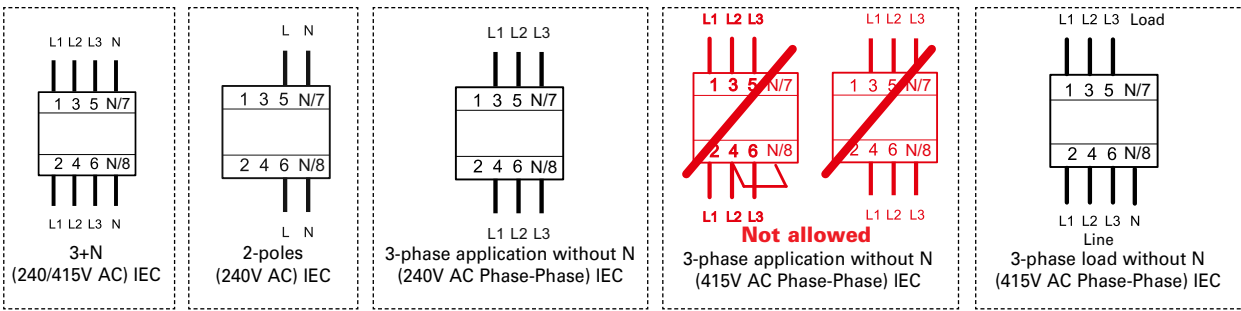


300mA Types:

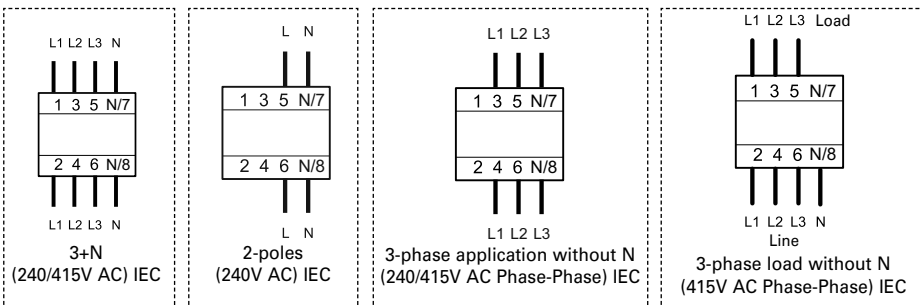

4-poles acc. to UL1053

30, 300mA Types:

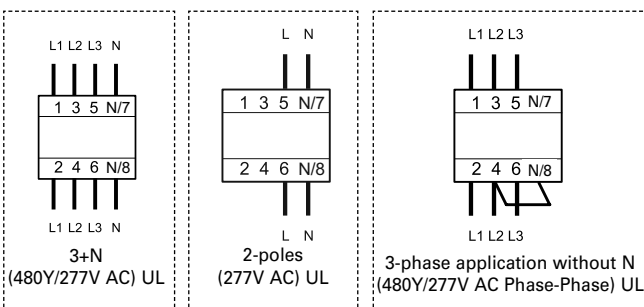

Impact of ambient temperature on the maximum permanent current allowed (A) FRCmM-NA

Ambient temperature	25A		40A		63A	
	2p	4p	2p	4p	2p	4p
40°	25	25	40	40	63	63
45°	21	22	37	37	59	59
50°	18	19	33	34	55	55
55°	14	16	30	31	50	50
60°	–	–	26	27	45	45
65°	–	–	20	24	40	41
70°	–	–	14	19	34	37
75°	–	–	8	15	28	31

Note: Please make sure that these values are not exceeded and that any upstream thermal overload protection switches off in time.

Max. back-up fuse FRCmM-NA (acc. to IEC)

Rating	Fuses		MCB's (Characteristic B/C)		
	In [A]	Short Circuit [A]	Overload [A]	Short Circuit [A]	Overload [A]
25	63 gG/gI	25 gG/gI	FAZ-C40	FAZ-C25	
40	63 gG/gI	40 gG/gI	FAZ-C40	FAZ-C40	
63	63 gG/gI	40 gG/gI	FAZ-C40	FAZ-C40	

Important:

In the case that the maximal possible operating current of the electrical installation don't exceed the rated current of the RCD only short circuit protection must be implemented. Overload protection must be implemented in the case if the maximal possible operating current of the electrical installation can exceed the rated current of the RCD.

Max. back-up fuse FRCmM-NA (acc. to UL)

Rating	Short Circuit [A]
25-63	70 J-Class Fuse

Important:

The maximal possible operating current of the electrical installation may not exceed the rated current of the RCD (VDE 0100-520 Bbl. 2).

1.12

Residual Current Devices

xEffect

Residual Current Devices FRCmM-NA-110 Type A according to UL1053 & IEC/EN 61008

SG49612



Description

- Line voltage independent RCCB for fault protection, additional protection as well as fire protection
- Certified according UL 1053 and IEC/EN 61008 to be used in 110V applications worldwide
- Comprehensive range of RCCBs available to fulfil most application needs
- Fault current tripping indicator enables to determine the tripping reason
- Comprehensive accessories available
- Suitable to be put into rail rolling stock applications due to additional certification

$I_n/I_{\Delta n}$
(A)

Type
Designation

Article No. Units per
package

Type A

Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A 

SG49612



4-poles

25/0.03	FRCmM-25/4/003-A-NA-110	167699	1/30
25/0.3	FRCmM-25/4/03-A-NA-110	167702	1/30
40/0.03	FRCmM-40/4/003-A-NA-110	167700	1/30
40/0.3	FRCmM-40/4/03-A-NA-110	167703	1/30
63/0.03	FRCmM-63/4/003-A-NA-110	167701	1/30
63/0.3	FRCmM-63/4/03-A-NA-110	167704	1/30

Type G/A

Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A (ÖVE E 8601) 

SG49612



2-poles

25/0.03	FRCmM-25/2/003-G/A-NA-110	167693	1/60
25/0.3	FRCmM-25/2/03-G/A-NA-110	167696	1/60
40/0.03	FRCmM-40/2/003-G/A-NA-110	167694	1/60
40/0.3	FRCmM-40/2/03-G/A-NA-110	167697	1/60
63/0.03	FRCmM-63/2/003-G/A-NA-110	167695	1/60
63/0.3	FRCmM-63/2/03-G/A-NA-110	167698	1/60

SG49612



4-poles

25/0.03	FRCmM-25/4/003-G/A-NA-110	167705	1/30
25/0.3	FRCmM-25/4/03-G/A-NA-110	167708	1/30
40/0.03	FRCmM-40/4/003-G/A-NA-110	167706	1/30
40/0.3	FRCmM-40/4/03-G/A-NA-110	167709	1/30
63/0.03	FRCmM-63/4/003-G/A-NA-110	167707	1/30
63/0.3	FRCmM-63/4/03-G/A-NA-110	167710	1/30

Specifications | Residual Current Devices FRcmM-NA-110

Description

Design

- Residual Current Circuit Breakers (RCCBs) for worldwide industrial and commercial applications which operate with 110V
- Designed and suitable to be put into an xEffect-System
- Twin-purpose terminal (lift/open-mouthed) above and below
- Contact position indicator red - green
- Tripping indicator white - blue
- Additional safety due:
 - possibility to seal the toggle
 - possibility to lock the toggle
- The device functions irrespective of the position of installation

Accessories

- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Auxiliary contacts to be mounted onto the device:
 - Universal tripping signal switch, also suitable for FAZ, FRBmM-1N
 - Auxiliary switch Z-HK can be mounted subsequently

Additional information for the application

- Delayed types suitable for being used with standard fluorescent tubes with or without electronical ballast
 - 30 mA-RCCBs: 30 units per phase conductor
 - 100 mA RCCBs: 90 units per phase conductor

Note: Depending on the fluorescent lamp manufacturer, partly more units possible. Symmetrical allocation of the fluorescent lamp ballasts on all phases favorably. Please still consider the technical data provided by the manufacturer of the lamps.
- Tripping is line voltage independent (VI) and therefore suitable for all BA-classes.

The RCD is suitable for fault protection, additional protection, fire protection within the regulations of the applicable wiring regulations (e.g.: IEC/EN 60364)
- The 4-pole device can also be used for 3-pole and 2 pole applications. Please refer to published connection diagrams

Test Button

- The test button "T" must be pressed once every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven.

Under special conditions (e.g.: damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltage due to switching of equipment and/or atmospheric discharges, portable equipment, ...), it's recommended to test in monthly intervals. Regulations according IEC/EN 60364 or wiring regulations still apply.
- The test button "T" tests the function of the RCCB itself. This test does not measure a "suitable" fault loop or if requirements of such are kept. Testing your fault loop (earth rod resistance, continuity of fault loop,...) requires special tests performed separately.

- **Type A:** These types are capable of sensing pulsating residual currents and are not negatively affected by a DC overlay of up to 6mA. These devices are also available as:
 - G/A short time delayed devices which are surge current proof up to 3kA. These devices enable a reliable and safe installation with increased system availability
- **Type G:** G Types offer a 10ms time delayed tripping curve and surge current proof capabilities up to 3kA and are highly recommended to be used for applications and installations where system availability is an important factor. Since "G" states a tripping curve and not a sensitivity, these devices can also be found as:
 - A Type RCCBs (-G/A-NA)

Accessories:

Auxiliary contact to be mounted on the left side	Z-HK	248432
Auxiliary contact to be mounted on the right side	Z-NHK	248434
Automatic restarting device	Z-FW/LP	248296
	Z-FW-LPD	265244
Remote control unit	Z-FW-MO	284730
Sets (Device + remote control unit)	Z-FW-LP/MO	290171
	Z-FW-LPD/MO	290172
IΔn testing module	Z-FW/003	248298
	Z-FW/010	248299
	Z-FW/030	248300
	Z-RC/AK-4TE	101062
Terminal cover 4-poles	Z-RC/AK-4TE	101062

Technical Data


		FRCmM-NA-110
Electrical according to IEC/EN 61008		
Design according to		IEC/EN 61008, ÖVE E 8601
Classified according to		IEC 61373, EN 45545-2
Current test marks as printed onto the device		
Tripping		instantaneous
Type G		10 ms delay at 50 Hz
Rated voltage	U_n	110/190 V, 50/60Hz
Limits operation voltage test circuit		
2-poles		94 - 121 V~
4-poles 30 mA		94 - 121 V~
4-poles 300 mA		94 - 210 V~
Rated tripping current	$I_{\Delta n}$	30, 300 mA
Sensitivity		AC and pulsating DC
Rated insulation voltage	U_i	440 V
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50µs)
Rated short circuit capacity	I_{cn}	10 kA with back-up fuse
Peak withstand current		
Type A		250 A (8/20 µs) surge current-proof
Type G/A		3 kA (8/20 µs) surge current-proof, 10 ms delay
Rated breaking capacity	I_m	
or rated fault breaking capacity	$I_{\Delta m}$	
$I_n = 25-40$ A		500 A
$I_n = 63$ A		630 A
Endurance		
electrical components		≥ 4,000 operating cycles
mechanical components		≥ 10,000 operating cycles
Electrical according to UL1053		
Design according to		UL1053
Current test marks as printed onto the device		
Tripping		instantaneous
Type G		8 ms delay at 60 Hz
Rated voltage	U_n	208/120 V, 60 Hz
Limits operation voltage test circuit		
2-poles		94 - 132 V~
4-poles 30 mA		94 - 132 V~
4-poles 300 mA		94 - 230 V~
Pick-up current		
30 mA Types		22 mA
300 mA Types		200 mA
Sensitivity		AC and pulsating DC
Overvoltage tested		530 V
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50µs)
Rated short circuit capacity	I_{cn}	5 kA acc. to CSA
Rated breaking capacity	I_m	
or rated fault breaking capacity	$I_{\Delta m}$	
$I_n = 25-40$ A		500 A
$I_n = 63$ A		630 A
Endurance		
electrical components		≥ 4,000 operating cycles
mechanical components		≥ 10,000 operating cycles

Mechanical


Frame size	45 mm
Device height	80 mm
Device width	35 mm (2MU), 70 mm (4MU)
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Degree of protection in moisture-proof enclosure	IP54
Upper and lower terminals	lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1.5 - 35 mm ² single wire 2 x 16 mm ² multi wire
Terminal screw	M5 (with slotted screw acc. to EN ISO 4757-Z2, Pozidriv PZ2)
Operation temperature	-25°C to +40°C
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC/EN 61008
Humidity	5-95 %
Pollution degree	2
Contact position indicator	red / green
Tripping indicator	white / blue

Connection diagram


2-poles



4-poles




Dimensions (mm)

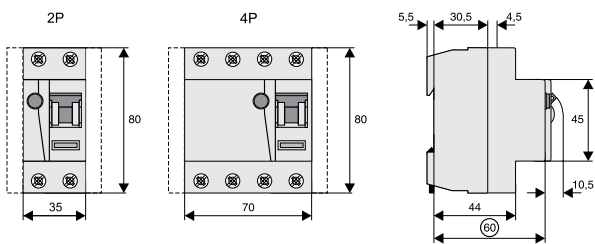

Correct connection


2-poles

30, 300mA Types:



4-poles

30, 300mA Types:

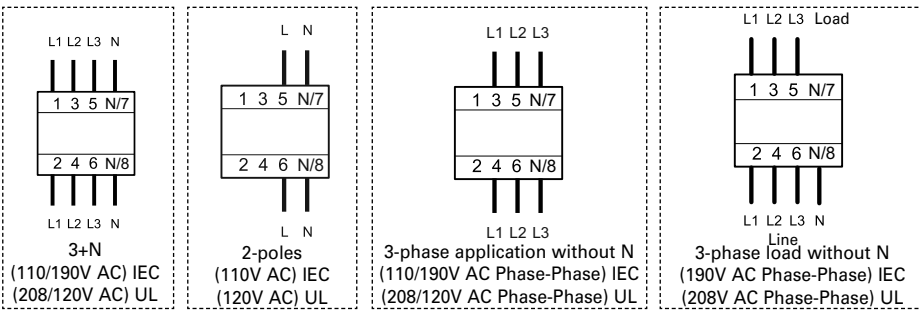

Impact of ambient temperature on the maximum permanent current allowed (A) FRCmM-NA-110

Ambient temperature	25A		40A		63A	
	2p	4p	2p	4p	2p	4p
40°	25	25	40	40	63	63
45°	21	22	37	37	59	59
50°	18	19	33	34	55	55
55°	14	16	30	31	50	50
60°	–	–	26	27	45	45
65°	–	–	20	24	40	41
70°	–	–	14	19	34	37
75°	–	–	8	15	28	31

Note: Please make sure that these values are not exceeded and that any upstream thermal overload protection switches off in time.

Max. back-up fuse FRCmM-NA-110 (acc. to IEC)

Rating In [A]	Fuses		MCB's (Characteristic B/C)	
	Short Circuit [A]	Overload [A]	Short Circuit [A]	Overload [A]
25	63 gG/gI	25 gG/gI	FAZ-C40	FAZ-C25
40	63 gG/gI	40 gG/gI	FAZ-C40	FAZ-C40
63	63 gG/gI	40 gG/gI	FAZ-C40	FAZ-C40

Important:

In the case that the maximal possible operating current of the electrical installation don't exceed the rated current of the RCD only short circuit protection must be implemented. Overload protection must be implemented in the case if the maximal possible operating current of the electrical installation can exceed the rated current of the RCD.

Max. back-up fuse FRCmM-NA-110 (acc. to UL)

Rating In [A]	Short Circuit [A]
25-63	70 J-Class Fuse

Important:

The maximal possible operating current of the electrical installation may not exceed the rated current of the RCD (VDE 0100-520 Bbl. 2).

Eaton's electrical business is a global leader with deep regional application expertise in power distribution and circuit protection; power quality, backup power and energy storage; control and automation; life safety and security; structural solutions; and harsh and hazardous environment solutions. Through end-to-end services, channel and an integrated digital platform & insights Eaton is powering what matters across industries and around the world, helping customers solve their most critical electrical power management challenges.

For more information, visit [Eaton.com](https://www.eaton.com).



Eaton Industries (Austria) GmbH
Scheydgasse 42
1210 Vienna
Austria

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland

© 2022 Eaton
All Rights Reserved
Publication No. CA003019EN
Article number 302005-MK
May 2022

Changes to the products, to the information contained in this document, and to prices are reserved; as are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

