KombiSIGN 40 / ClassicLOOK TwinLIGHT Classic 24VAC/DC BU

雪井	3111	-	AH	
33			1115	
劉			1115	
罰行				
黑汉			111	
图}				
333.				
复行				
潮				
副			1111	
黑沿				
4277	, <u>, , , , , ,</u> , , ,	1111	1111	THE

ļ

Part No.:	634.510.75			1		UK		
Series:	KombiSIGN 40		、て	RoHS2	c (UL) us	ĈÂ		
MECHAN	ICAL DATA							
Height		59 n	59 mm					
Diameter		40 n	40 mm					
Materials		PC	PC					
Dome colour		Blue	Blue					
Protection category			IP66 IP69K					
Working temperature minimum		-30°	-30°C					
Working temperature maximum		+609	+60°C					
Weight w	ith packaging		40 g					
Product weight		29 g	29 g					
ELECTRIC	AL DATA							
Operatin	g voltage		24V	24V				
Operatin	g voltage type		AC/	AC/DC				
Operating voltage frequency		50H:	50Hz					
Operating voltage tolerance		+/-	+/- 10%					
Rated op	erational voltage	е	24 V	24 VDC				
Rated operational current		30 n	30 mA					
Rated inrush current		500	500 mA					
Protection class		Prot	Protection class 3					
Pollution	degree		3	3				
Request t	to external PSU		SELV	SELV/PELV				
OPTICAL	DATA							
Light source		LED	LED					
Light colour		Blue	Blue					
Optical signal image		Perr	Blink Permanent TwinLight					
Blink frequency		1 Hz	1 Hz					
Service life optical		50,0	50,000 h maximum					
APPROVA	AL DATA							
Conform	s with CE		Yes	Yes				
WEEE			Yes	Yes				
Conform	s with ATEX-direc	tive	No	No				
Conform	s with CCC		No	No				
Conform	s with UL		cUL	CULus				
UL Type R	Rating		Туре	Type 12				
Conform	s with FCC		No	No				


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

i

KombiSIGN 40 / ClassicLOOK TwinLIGHT Classic 24VAC/DC BU

Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No
MTTF-value [years]	1695

DRAWING

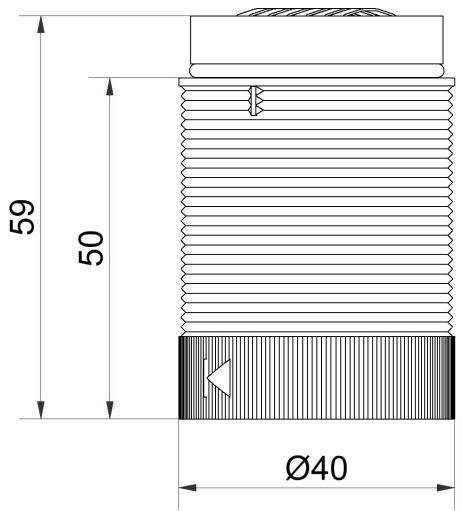

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.