

KombiSIGN 71 / LED Permanent Beacon 644  
**LED Perm. light element 24VAC/DC RD**



|           |              |
|-----------|--------------|
| Part No.: | 644.100.75   |
| Series:   | KombiSIGN 71 |



**MECHANICAL DATA**

|                             |                  |
|-----------------------------|------------------|
| Height                      | 66 mm            |
| Diameter                    | 70 mm            |
| Materials                   | PC               |
| Dome colour                 | Red              |
| Protection category         | IP65             |
| Service life optical        | 50,000 h minimum |
| Working temperature minimum | -20°C            |
| Working temperature maximum | +50°C            |
| UL Type Rating              | Type 12          |
| Weight with packaging       | 73 g             |
| Product weight              | 58 g             |

**ELECTRICAL DATA**

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 35 mA              |
| Rated inrush current        | 100 mA             |
| Protection class            | Protection class 2 |
| Pollution degree            | 3                  |

**OPTICAL DATA**

|                      |           |
|----------------------|-----------|
| Light source         | LED       |
| Light colour         | Red       |
| Optical signal image | Permanent |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 71 / LED Permanent Beacon 644

**LED Perm. light element 24VAC/DC RD**

## DRAWING

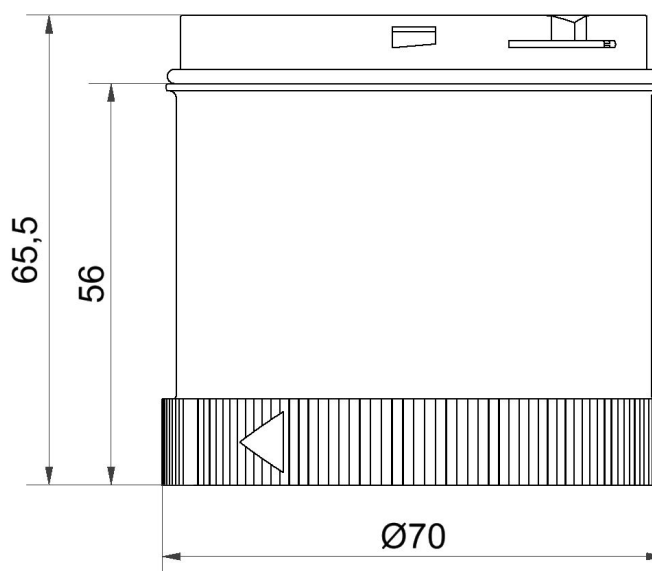

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.