



Sample image

Datasheet

Article number: 70001950

Designation: CA10.A178.FT2

Description: Switch

IEC 60947-3 EN 60947-3, VDE 0660 Teil 107

Tension assignée d'isolement Ui

Tension (V) AC / DC

690 AC / DC

Tension assignée de tenue aux chocs Uimp

Tension (KV) Classe de protection surcharges Degré de pollution

Type d'alimentation

Fonction

4 III

3

Valable pour un réseau triphasé avec le neutre à la terre

Switch disconnecter

Courant ininterrompu et thermique conventionnel Iu/Ith

Intensité (A)

Température Ambiante (°C)

Température Maxi (°C)

Spécification complémentaire

20

55

60 Température ambiante +55°C durant 24 heures avec point à +60°C

Courant assigné d'emploi Ie

Catégorie d'emploi

Tension (V)

Intensité (A)

AC-15 220 - 240 6

AC-15 380 - 440 4

Puissance assignée d'emploi

Catégorie d'emploi

Tension (V)

Nb de phases

Nb de pôles

Puissance (kW)

AC-3 220 - 240 3 3 3

AC-3 380 - 440 3 3 5,50

AC-3 660 - 690 3 3 5,50

AC-3 220 - 240 1 2 2,20

AC-3 380 - 440 1 2 3

AC-23A 220 - 240 3 3 3,70

AC-23A 380 - 440 3 3 7,50

AC-23A 660 - 690 3 3 7,50

AC-23A 220 - 240 1 2 2,50

AC-23A 380 - 440 1 2 3,70

Protection par fusible (IEC)

Caractéri

Nombre de fusible

Intensité (A)

gG 1 25

UL60947-4-1, UL508

Nominal Voltage

Tension (V) AC / DC

300 AC / DC

Tension assignée d'isolement Ui

Tension (V) AC / DC

300 AC

Rated thermal current

Intensité (A)

Température Ambiante (°C) Additional Text

20

0 - 40 --

Horsepower rating

Across-the-Line Motor Starting

Tension (V)

Nb de phases

Nb de pôles

Power (HP)

Ambient temperature [°C]

Reversing 110 - 120 1 2 0,17 40

Reversing 220 - 240 1 2 0,50 40

Reversing 277 - 277 1 2 0,60 40

Reversing 110 - 120 3 3 0,50 40

Reversing 220 - 240 3 3 1 40

DOL 110 - 120 1 2 0,50 40

DOL 220 - 240 1 2 1 40

DOL 277 - 277 1 2 2 40

DOL 110 - 120 3 3 1,50 40

DOL 220 - 240 3 3 3 40

Pilot duty rating code

Duty Code

A300

SCCR / Max. fuse rating

Conditions of acceptability

These devices are suitable for use on circuits capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by Class RK1 fuses. Manual Motor Controllers when intended for use as a motor disconnecter are suitable for use on a circuit capable of delivering not more than 5000 rms symmetrical amperes, 600V ac max. when protected by 30A Class J time delay fuses.

Temp. rating of wire

Temperature rating (°C)

Intensité (A) Text

60 - 75

-- Use copper wire only

Connecting instructions						
Markings						
When intended for use as a motor disconnecter the device shall be provided with a method of being locked in the OFF-position.						
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	300	20	1	2	1	
AC	300	20	3	3	1	
CSA						
Nominal Voltage						
			Tension (V) AC / DC			
			300 AC			
Tension assignée d'isolement Ui						
			Tension (V) AC / DC			
			300 AC			
Rated thermal current						
		Intensité (A)	Température Ambiante (°)		Additional Text	
		20	0 - 40		--	
Horsepower rating						
Across-the-Line Motor Starting			Tension (V)	Nb de phases	Nb de pôles	Power (HP)
DOL			110 - 120	1	2	0,50
DOL			220 - 240	1	2	1
DOL			277 - 277	1	2	2
DOL			110 - 120	3	3	1,50
DOL			220 - 240	3	3	3
Pilot duty rating code						
Duty Code						
A300						
Temp. rating of wire						
			Temperature rating (°C)	Intensité (A)		Text
			75			-- only
General Use						
AC / DC	Tension (V)	Intensité (A)	Nb de phases	Nb de pôles	No. of contacts in series	
AC	300	20	1	1	1	
GENERAL TECHNICAL INFORMATION						
Tightening torque of screws						
			tightening torque (Nm)		tightening torque (lb-in)	
			0,60		5	
Stripping length						
			Length (mm) --			
			8 STRIPPINGLENGTH			
Size of conductor						
composition of conductor	Min. / Max. value		No. of conductor per terminal		Cross section (mm²) or (AWG/kcmil)	
solid wire	Min.		1		0,5mm²	
solid wire	Min.		2		0,5mm²	
flexible wire	Min.		1		0,75mm²	
flexible wire	Min.		2		0,75mm²	
flexible wire	Max.		2		2,5mm²	
flexible wire	Max.		2		AWG 14	
Single-core or stranded wire	Max.		2		AWG 12	
Single-core or stranded wire	Max.		2		2,5mm²	
flexible wire with ferrule according to DIN 46228	Min.		1		0,5mm²	
flexible wire with ferrule according to DIN 46228	Max.		2		2,5mm²	
flexible wire with ferrule according to DIN 46228	Min.		2		0,5mm²	
Approbations						
Specification						Marking
EAC						
CE marking						
UK Directives						
CSA C.22.2 No.14						
GB/T14048.3						
Recommandations concernant le tournevis						
Type			Value			
Tournevis cruciforme			PH1			
Slot screwdriver according to DIN 5264			0,8x4			
General Information						
Text						
- Ne jamais lubrifier ou traiter les contacts.						
- Les commutateurs ne peuvent être montés, branchés et mis en service que par une personne qualifiée selon les règles techniques en vigueur.						

General Information

Text

- Use copper wire only. Do not coat the wire end with tin.
- Les bornes qui ne sont pas supposées être utilisées pour le raccordement de l'appareil sont livrées serrées et ne doivent pas être desserrées. Si toutefois ces bornes sont malgré tout ouvertes accidentellement, vérifier qu'aucun shunt n'est manquant. Le câblage terminé, s'assurer que toutes les bornes sont serrées.
- Après mise en place des les commutateurs l'espace entre bornes doit être suffisant pour répondre aux exigences des normes en vigueur.

Waste Electrical & Electronic Equipment (WEEE)

Picture name Description



Do not throw in the trash as care must be taken to ensure environmentally sound disposal and recycling. Please either use an environmentally friendly waste disposal company; return to the supplier for disposal; or return direct to the manufacturer, Kraus & Naimer. You can find local Kraus & Naimer offices at www.krausnaimer.com

Proposition 65

Picture name Description




WARNING: This product can expose you to chemicals including nickel and lead, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

Type de contacts: Rigid contact bridge

Revêtement des Contacts: Silver

Types de raccordement: Screw terminal


Fixation-FT2

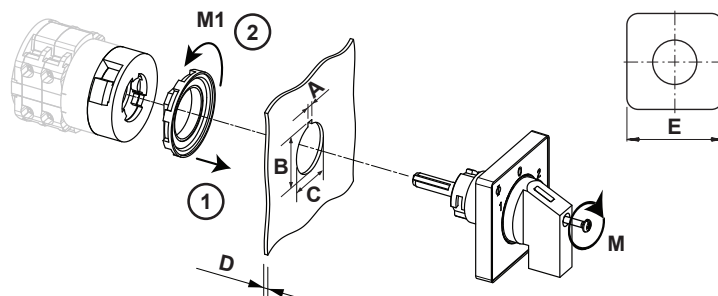

IP - Code front side		IP66, IP67, IP69k
Stages		1,00 - 12,00
A	H	3,20 mm
A+_tol.	H	0,20 mm
A-_tol.	H	0,00 mm
B	H	24,10 mm
B+_tol.	H	0,40 mm
B-_tol.	H	0,00 mm
C	Ø	22,30 mm
C+_tol.	Ø	0,40 mm
C-_tol.	Ø	0,00 mm
D	H	<= 6,00 mm
E	□	48,00 mm
M	↺	0,50 Nm
M1	↺	1,80 Nm

Wiring diagram

CA10.A178.FT2

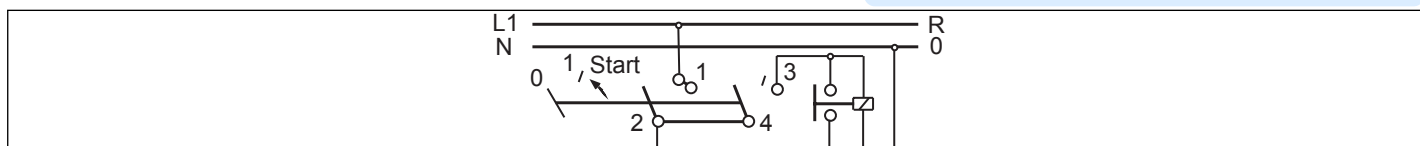


Switch program

CA10.A178.FT2



Kraus & Naimer


CA10
A178
Page 1 of 1

Face Plate															
		1	3	5	7	9	11	13	15	17	19	21	23		
															
Switching Angle 90 Total switching Angle 120		2	4	6	8	10	12	14	16	18	20	22	24		
	0	270													
	285														
	300														
	315														
	330														
	345														
	1	0													
	15														
	START	30													
	45														
	60														
	75														
	90														
	105														
	120														
	135														
	150														
	165														
	180														
	195														
210															
225															
240															
255															

Version: 131

Face plate

S0.F119/A10.E1L

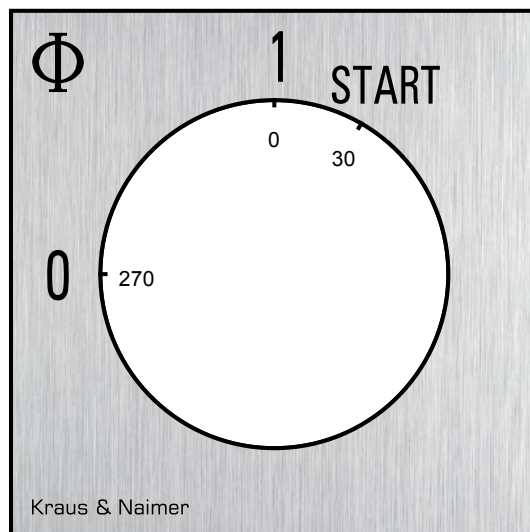

HANDLES

Designation: S0C.G251

Handle colour: "1" black

