## **SIEMENS**

Data sheet 3SK1220-2AB40



SIRIUS safety relay Input expansion Advanced Input expansion for an additional 2-channel or two 1-channel sensors Us = 24 V DC Spring-type terminal (push-in)

product brand name	SIRIUS
product category	Safety relays
product designation	Sensor extension
General technical data	
protection class IP of the enclosure	IP20
touch protection against electrical shock	finger-safe
insulation voltage rated value	50 V
ambient temperature	
during storage	-40 +80 °C
<ul> <li>during operation</li> </ul>	-25 +60 °C
air pressure according to SN 31205	900 1 060 hPa
relative humidity during operation	10 95 %
installation altitude at height above sea level maximum	4 000 m; Derating, see Product Notification 109792701
vibration resistance according to IEC 60068-2-6	5 500 Hz: 0.75 mm
shock resistance	10g / 11 ms
surge voltage resistance rated value	800 V
EMC emitted interference	IEC 60947-5-1, Class A
installation environment regarding EMC	This product is suitable for Class A environments only. In household environments, this device can cause unwanted radio interference. The user is required to implement appropriate measures in this case.
overvoltage category	3
degree of pollution	3
reference code according to EN 61346-2	F
reference code according to IEC 81346-2	F
power loss [W] maximum	1.2 W
number of sensor inputs 1-channel or 2-channel	1
type of the safety-related wiring of the inputs	single-channel and two-channel
product feature cross-circuit-proof	Yes
Safety Integrity Level (SIL) according to IEC 62061	3
Safety Integrity Level (SIL) according to IEC 61508	3
performance level (PL) according to ISO 13849-1	e
category according to EN ISO 13849-1	4
PFHD with high demand rate according to EN 62061	1E-9 1/h
PFDavg with low demand rate according to IEC 61508	7E-6
T1 value for proof test interval or service life according to IEC 61508	20 a
hardware fault tolerance according to IEC 61508	1
safety device type according to IEC 61508-2	Type B
Inputs/ Outputs	
number of outputs as contact-affected switching element  • as NC contact	

<ul> <li>for signaling function instantaneous contact</li> </ul>	0
<ul> <li>for signaling function delayed switching</li> </ul>	0
<ul> <li>— safety-related instantaneous contact</li> </ul>	0
<ul> <li>— safety-related delayed switching</li> </ul>	0
<ul> <li>as NO contact</li> </ul>	
<ul> <li>for signaling function instantaneous contact</li> </ul>	0
<ul> <li>for signaling function delayed switching</li> </ul>	0
<ul> <li>— safety-related instantaneous contact</li> </ul>	0
<ul> <li>— safety-related delayed switching</li> </ul>	0
number of outputs as contact-less semiconductor	
switching element	
<ul> <li>for signaling function</li> </ul>	
— delayed switching	0
stop category according to EN 60204-1	0
design of input start input	Yes
type of electrical connection plug-in socket	No
wire length between sensor and electronics evaluation device with Cu 1.5 mm² and 150 nF/km maximum	4 000 m
make time with automatic start	
• typical	60 ms
at DC maximum	60 ms
make time with automatic start after power failure	
• typical	6 500 ms
• maximum	6 500 ms
make time with monitored start	
maximum	60 ms
• typical	60 ms
backslide delay time after opening of the safety circuits	40 ms
typical	10 110
recovery time after opening of the safety circuits typical	30 ms
pulse duration	
	60 mg
<ul> <li>of the sensor input minimum</li> </ul>	60 ms
<ul><li> of the sensor input minimum</li><li> of the ON pushbutton input minimum</li></ul>	0.15 s
·	
of the ON pushbutton input minimum	
of the ON pushbutton input minimum  Control circuit/ Control	0.15 s
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage	0.15 s
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC	0.15 s  DC
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      rated value	0.15 s
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC	0.15 s  DC
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of	0.15 s  DC
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil	0.15 s  DC  24 V
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC	0.15 s  DC  24 V
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions	0.15 s  DC  24 V  0.8 1.2
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position	0.15 s  DC  24 V  0.8 1.2
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side	0.15 s  DC  24 V  0.8 1.2  any 5 mm
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side  fastening method  width	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side  fastening method  width  height	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side fastening method  width  height  depth	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage  at DC  — rated value  operating range factor control supply voltage rated value of magnet coil  at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side  fastening method  width  height  depth  Connections/ Terminals	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm 121.6 mm
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side fastening method  width  height depth  Connections/ Terminals  type of electrical connection	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side  fastening method  width  height  depth  Connections/ Terminals  type of electrical connection  type of connectable conductor cross-sections	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm 121.6 mm
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side fastening method  width  height  depth  Connections/ Terminals  type of electrical connection  type of connectable conductor cross-sections      solid	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm 121.6 mm
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side fastening method  width height depth  Connections/ Terminals  type of electrical connection  type of connectable conductor cross-sections      solid     finely stranded	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm 121.6 mm  spring-loaded terminal (push-in)  1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²)
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side fastening method  width height depth  Connections/ Terminals  type of electrical connection  type of connectable conductor cross-sections      solid     finely stranded     — with core end processing	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm 121.6 mm  spring-loaded terminal (push-in)  1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²)  1x (0.5 1.0 mm²), 2x (0.5 1.0 mm²)
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side  fastening method  width  height  depth  Connections/ Terminals  type of electrical connection  type of connectable conductor cross-sections      solid      finely stranded      — with core end processing      — without core end processing	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm 121.6 mm  spring-loaded terminal (push-in)  1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²)
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side fastening method  width height depth  Connections/ Terminals  type of electrical connection  type of connectable conductor cross-sections      solid     finely stranded     — with core end processing	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm 121.6 mm  spring-loaded terminal (push-in)  1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²)  1x (0.5 1.0 mm²), 2x (0.5 1.0 mm²)
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage      at DC      — rated value  operating range factor control supply voltage rated value of magnet coil      at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side  fastening method  width  height depth  Connections/ Terminals  type of electrical connection  type of connectable conductor cross-sections      solid      finely stranded      — with core end processing      — without core end processing  type of connectable conductor cross-sections for AWG	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm 121.6 mm  spring-loaded terminal (push-in)  1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²) 1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²) 1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²)
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage  at DC  — rated value  operating range factor control supply voltage rated value of magnet coil  at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side  fastening method  width  height  depth  Connections/ Terminals  type of electrical connection  type of connectable conductor cross-sections  solid  finely stranded  — with core end processing  — without core end processing  type of connectable conductor cross-sections for AWG cables	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm 121.6 mm  spring-loaded terminal (push-in)  1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²) 1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²) 1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²)
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage  at DC  — rated value  operating range factor control supply voltage rated value of magnet coil  at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side  fastening method  width  height  depth  Connections/ Terminals  type of electrical connection  type of connectable conductor cross-sections  solid  finely stranded  — with core end processing  — without core end processing  type of connectable conductor cross-sections for AWG cables  solid  stranded	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm 121.6 mm  spring-loaded terminal (push-in)  1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²) 1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²) 1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²)
of the ON pushbutton input minimum  Control circuit/ Control  type of voltage of the control supply voltage  control supply voltage  at DC  — rated value  operating range factor control supply voltage rated value of magnet coil  at DC  Installation/ mounting/ dimensions  mounting position  required spacing for grounded parts at the side  required spacing with side-by-side mounting at the side fastening method  width  height  depth  Connections/ Terminals  type of electrical connection  type of connectable conductor cross-sections  solid  finely stranded  — with core end processing  — without core end processing  type of connectable conductor cross-sections for AWG cables  solid	0.15 s  DC  24 V  0.8 1.2  any 5 mm 0 mm screw and snap-on mounting 17.5 mm 100 mm 121.6 mm  spring-loaded terminal (push-in)  1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²) 1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²) 1x (0.5 1.5 mm²), 2x (0.5 1.5 mm²)

	channel / 2-channel sensor connection, cross-circuit detection, startup testing, antivalent sensors, 2-hand switches
suitability for operation device connector 3ZY12	Yes
suitability for interaction press control	No
suitability for use	
<ul> <li>safety switch</li> </ul>	Yes
<ul> <li>monitoring of floating sensors</li> </ul>	Yes
<ul> <li>monitoring of non-floating sensors</li> </ul>	Yes
<ul> <li>magnetically operated switch monitoring</li> </ul>	Yes
<ul> <li>safety-related circuits</li> </ul>	Yes
Certificates/ approvals	
certificate of suitability	
<ul> <li>TÜV (German technical inspectorate) certificate</li> </ul>	Yes
UL approval	Yes
General Product Approval	EMC



Confirmation









**Functional** Safety/Safety of Machinery

**Declaration of Conformity** 

**Test Certificates** 

Marine / Shipping

Type Examination Certificate





Type Test Certificates/Test Report





Marine / Shipping

other

Railway





Confirmation

Confirmation

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SK1220-2AB40


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SK1220-2AB40


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax\_de.aspx?mlfb=3SK1220-2AB40&lang=en

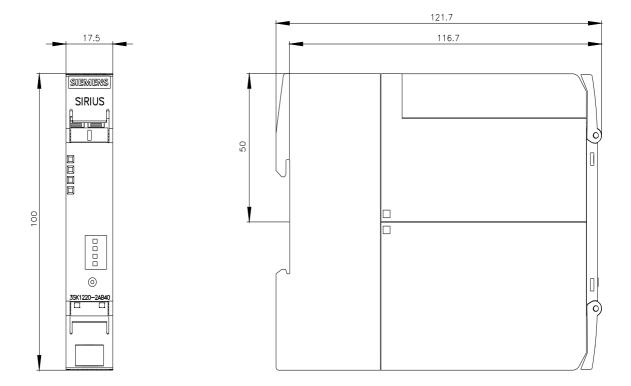

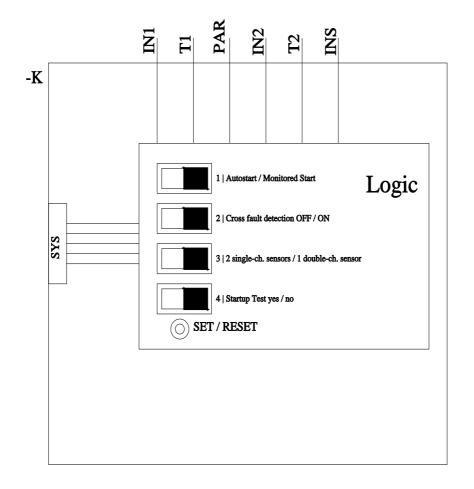

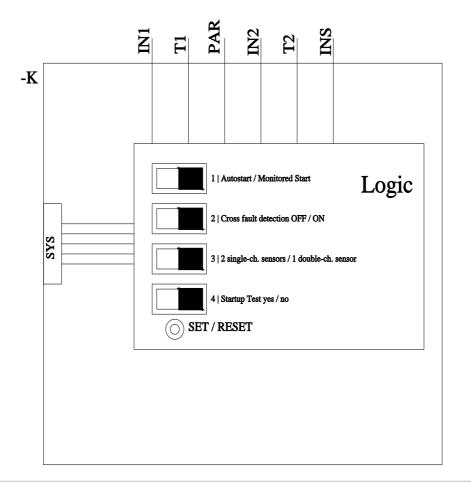

last modified: 8/11/2023 🖸