

Midi Horns and Sirens / Signal Horn 570

Signal horn WM Contin. tone 24VDC GY

Part No.: 570.052.55

MECHANICAL DATA

| | |
|------------------------------|-----------------------------|
| Length | 152 mm |
| Height | 360 mm |
| Diameter | 148 mm |
| Materials | PC/ABS |
| Housing colour | Grey |
| Protection category | IP55 |
| Connection | Screw terminals |
| cross-sectional area maximum | 2,50mm ² / 14AWG |
| Cable entry | Through hole |
| Cable entry maximum | d = 10 mm |
| Type of fixing | Wall mounting |
| Working temperature minimum | -20°C |
| Working temperature maximum | +60°C |
| Weight with packaging | 1065 g |
| Product weight | 880 g |

ELECTRICAL DATA

| | |
|-----------------------------|--------------------|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 350 mA |
| Rated inrush current | <5A |
| Protection class | Protection class 2 |
| Pollution degree | 3 |

ACUSTICAL DATA

| | |
|-----------------------------|-----------------|
| Volume (max) at 1m distance | 108,0 dB (A) |
| Acoustic signal image | Continuous tone |
| Acoustic service life | 250 h minimum |

APPROVAL DATA

| | |
|-----------------------------|------|
| Conforms with CE | yes |
| WEEE | yes |
| Conform with ATEX-directive | no |
| Conforms with CCC | no |
| Conforms with UL | nein |
| Conforms with FCC | no |
| Conforms with IC | No |

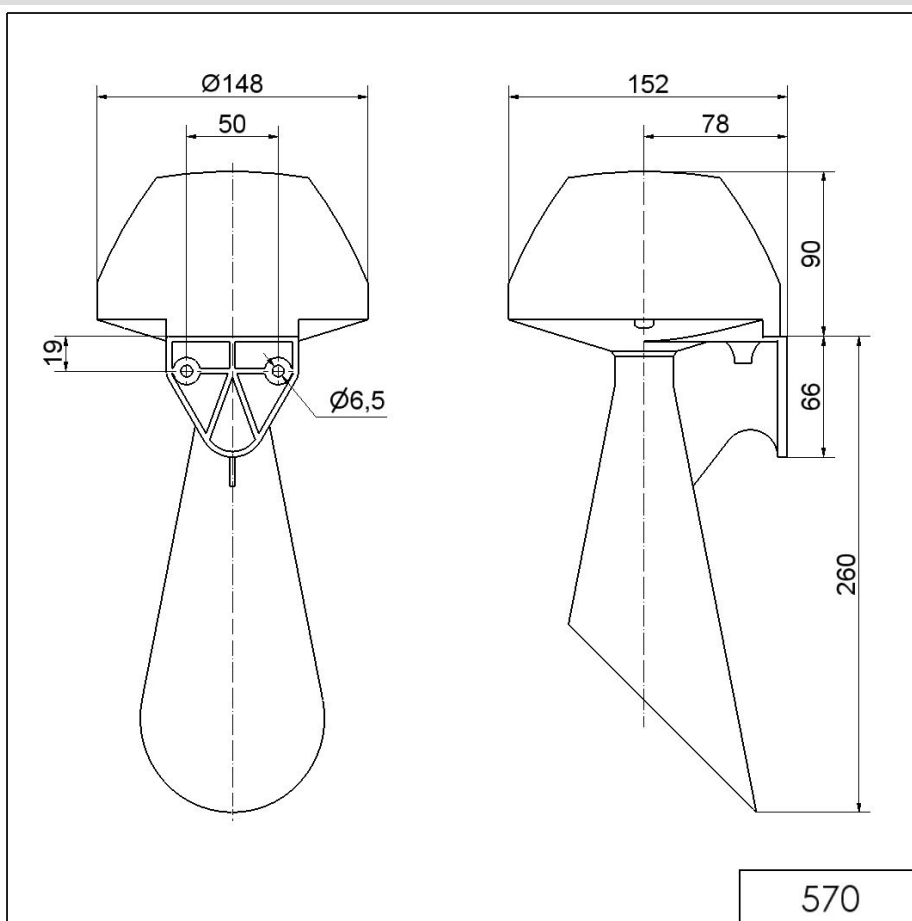

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Midi Horns and Sirens / Signal Horn 570

Signal horn WM Contin. tone 24VDC GY

| | |
|--------------------------|-----|
| EAC Zertifikat vorhanden | yes |
| Conforms with AS-I | no |
| ICAO Certification | No |
| Conforms with GL | no |
| Conforms with RoHS CN | no |
| Conforms with VdS | no |

DRAWING



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.