

Code (VP, VS, VPD)	Description
1305	Shaver Socket Dual Voltage with Neon

Vimark Series - Shaver Socket Dual Voltage

Features

- High grade urea frontplate with antimicrobial properties
- Neon indicator
- Dual voltage outlet 230V/115V
- 20VA power rating

Safety Instructions

1. These instructions should be read carefully and retained after installation for future reference and maintenance.
2. This product should be installed in accordance with current edition of IET wiring regulations, BS 7671 and local building regulations.
3. Always switch off the mains electrical supply at the consumer unit before commencing installation.
4. Use appropriate size metal, dry lining or pattress mounting boxes.
5. Metal mounting boxes must be earthed and plastic grommets must be used to protect cable insulation.
6. When preparing cables, strip insulation to correct length to allow the conductors to reach the terminals.
7. Shaver Sockets must be earthed and earth conductor must be sleeved with green/yellow insulation sleeving.

If in doubt, contact a qualified electrician

Environmental Instructions

This product may contain substances that can be hazardous to the environment if not disposed of properly. Waste electrical and electronic equipment (WEEE) should never be disposed of with general household waste but must be separated for its correct treatment and recovery. Where possible recycle your packaging.

Installation Instructions

Wiring colours

As of April 2004, twin and earth cable core colours for all new fixed wiring installation in the UK have been updated. Refer to table below for twin and earth wiring colours identification.


	Wiring colours	
	Pre April 2004	Post April 2004
Live	Red	Brown
Neutral	Black	Blue
Earth	Yellow/Green	Yellow/Green

SUGGESTED METHOD OF INSTALLATION

Read instructions and check you have all the tools and accessories to complete the installation safely and in compliance with current electrical regulations

1. Ensure the electrical supply is switched off.
2. Install a metal/pattress box on a wall and route the power cable through a knockout on the box.
3. Prepare the power cable by stripping the Live, Neutral and Earth wires to required length.
4. Take the new shaver socket and loosen the terminals at the back. Insert the Live, Neutral and Earth wires into their respective terminals and tighten the terminal screws. Follow diagrams on the left for typical wiring details.
5. If a metal mounting box is installed, it must be earthed; and bare earth conductors must be sleeved with green/yellow insulation sleeving.
6. Screw shaver socket onto the metal/pattress box on the wall.
7. Switch on the power supply and check the operation.

Shaver Socket Dual Voltage

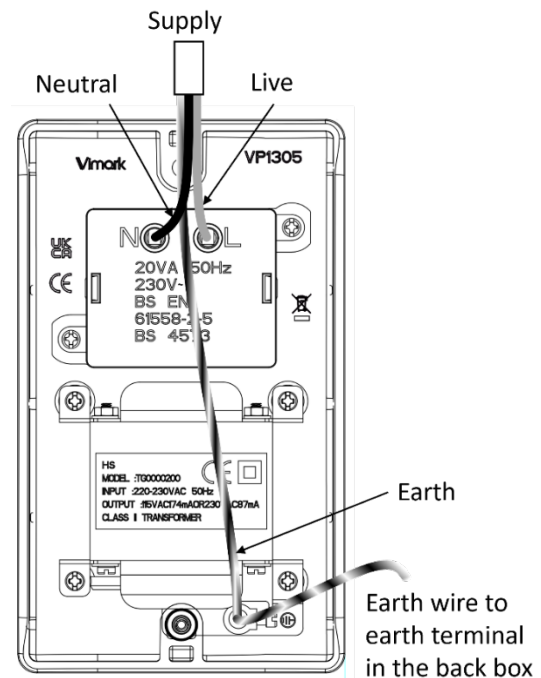

Note:

1. When using the shaver socket, ensure that the shaver plug is fully inserted into the socket.
2. The shaver socket is not intended for continuous use or loads exceeding 20VA.

Specification

Input Voltage	250V ac 50/60Hz	Mounting Box Recommended Depth	47mm
Output Voltage	230V/115V	Compliance	BS EN 61558-2-5

Deta Electrical Company Limited

UK: Panattoni Park Luton Road Chalton Bedfordshire LU4 9TT
 EU: Unit 16 Ashbourne Ind. Est. Ashbourne Co. Meath A84 W972
 deta.co.uk | Technical Helpline: +44(0)1582 544 548