




Color: ■ blue

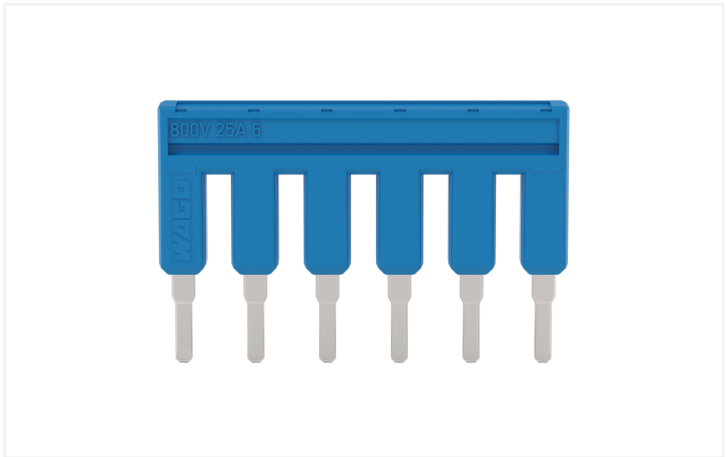

Technical data	
Number of spacings	6 -times
Electrical data	
Rated current	25 A
Physical data	
Width	29.5 mm / 1.161 inches
Height	4.1 mm / 0.161 inches
Depth	19 mm / 0.748 inches

Material data	
Color	blue
Fire load	0.019 MJ
Weight	3 g

Commercial data	
PU (SPU)	25 pcs
Packaging type	Bag
Country of origin	DE
GTIN	4055143687843
Customs tariff number	85366990990

Product Classification	
UNSPSC	39121421
eCl@ss 10.0	27-14-11-40
eCl@ss 9.0	27-14-11-40
ETIM 9.0	EC000489
ETIM 10.0	EC000489
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Environmental requirements			
Environmental Testing		Environmental Testing	
Test specification: Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06	Shock pulse form	Half sine
Test procedure: Railway applications – Rolling stock equipment – Vibration and shock tests	DIN EN 61373 (VDE 0115-0106):2011-04	Acceleration	5g (highest test level used for all axes)
Spectrum/Mounting location	Service life test, Category 1, Class A/B	Shock duration	30 ms
Functional test with noise-like oscillations	Test passed according to Section 8 of the standard	Number of shocks (per axis)	3 pos. und 3 neg.
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz	Test directions	X, Y and Z axes
Acceleration	0.101g (highest test level used for all axes)	Extended testing: Monitoring of contact faults and interruptions	Passed
Test duration per axis	10 min.	Extended testing: Voltage drop measurement before and after each axis	Passed
Test directions	X, Y and Z axes	Vibration and shock stress for rolling stock equipment	Passed
Monitoring of contact faults and interruptions	Passed		
Voltage drop measurement before and after each axis	Passed		
Simulated service life test through increased levels of noise-like oscillations	Test passed according to Section 9 of the standard		
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz		
Acceleration	0.572g (highest test level used for all axes)		
Test duration per axis	5 h		
Test directions	X, Y and Z axes		
Extended testing: Monitoring of contact faults and interruptions	Passed		
Extended testing: Voltage drop measurement before and after each axis	Passed		
Shock test	Test passed according to Section 10 of the standard		

Approvals / Certificates

Declarations of conformity and manufacturer's declarations



Approval	Standard	Certificate Name
Railway WAGO GmbH & Co. KG	-	Railway Ready

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 2002-406/000-006



Documentation

Bid Text
2002-406/000-006
19.02.2019
xml 2.52 KB
2002-406/000-006
27.04.2017
doc 24.00 KB



CAD/CAE-Data

CAD data
2D/3D Models 2002-406/000-006





CAE data
EPLAN Data Portal 2002-406/000-006
WSCAD Universe 2002-406/000-006
ZUKEN Portal 2002-406/000-006



Installation Notes

Commoning



Insert push-in type jumper bar and push down until it hits backstop.

Removing a push-in type jumper bar:
Insert the operating tool between the jumper and partition wall of the dual jumper slots, then lift up the jumper.
Place the operating tool in the center of jumpers for up to five contacts (see above), or alternately on both sides for jumpers with more than five contacts.


Commoning



Custom jumpers are created by breaking and removing jumper contacts (2000, 2001, 2002, 2004 Series).

Marking with a felt-tip pen.

Commoning




For example, colored push-in type jumper bars are used with sensor terminal blocks.


Commoning




Stepping down via push-in type jumper bar.



Stepping down via push-in type jumper bar:
Commoning via closed terminal side with end plate allows jumpering over two cross-section sizes, e.g., from 16 mm² (6 AWG) to 6 mm² (10 AWG) or from 6 mm² (10 AWG) to 2.5 mm² (14 AWG) (see illustration above).



Stepping down via push-in type jumper bar:
Commoning via open terminal side with end plate allows jumpering over two cross-section sizes for 16 mm² (6 AWG) and 10 mm² (8 AWG) and one cross-section size for 6/4/2.5 mm² (10/12/14 AWG). An example: from 16 mm² (6 AWG) to 6 mm² (10 AWG) (see illustration above) or from 10 mm² (8 AWG) to 4 mm² (12 AWG).



Note:
The total current of the outgoing circuits must not exceed the nominal current of the step-down jumper/push-in type jumper bar.