Data Sheet | Item Number: 224-112


2-conductor lighting connector; push-button on lighting side; Lighting side: for all conductor types; Inst. side: for solid conductors; 224 Series; max. 2.5 mm²; Surrounding air temperature: max 60°C; 2,50 mm²; white

https://www.wago.com/224-112





Color: white

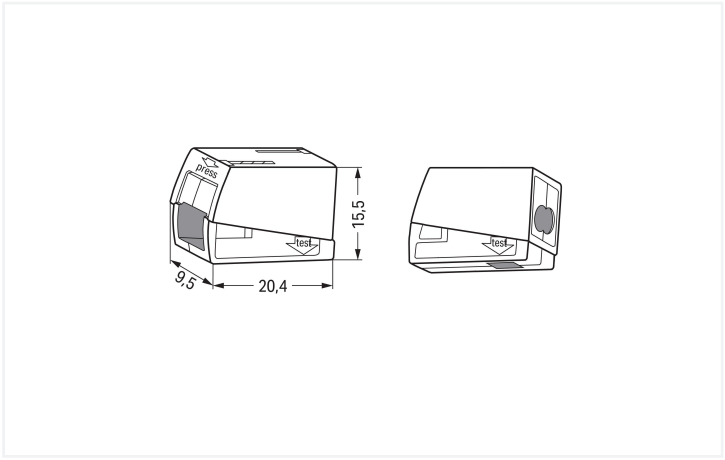

Dimensions in mm

Lighting connector, 224 Series, PUSH WIRE®

Connecting conductors is quick and easy with this lighting connector (item number 224-112). Our 224 Series lighting connectors make connecting lights a breeze—and completely safe. Light up any space quickly and reliably. If you need to connect a fine-stranded conductor with a solid conductor, choose the 224 Series for performance you can trust. Conductors should only be connected to this lighting connector if their strip length is between 9 and 11 mm . Our splicing connector is rated for 400 V and is designed to handle a rated current of up to 24 A. It is therefore suitable for high-load applications. This product incorporates conductor terminals and utilizes PUSH WIRE® and CAGE CLAMP®. Our trusted PUSH WIRE® connection offers the fastest method for clamping conductors. It utilizes the conductor's stiffness to overcome the clamping spring's contact force. Our renowned universal connection known as CAGE CLAMP® leads the way when it comes to connection technology and electrical interconnections. Dimensions: (9.5 x 15.5 x 20.5) mm (width x height x depth). Depending on the conductor type, this lighting connector is ideal for conductor cross sections ranging from 1 mm² to 2.5 mm² on one side and for conductor cross sections from 0.5 mm² to 2.5 mm² on the other side.

PUSH WIRE® – the most reliable way to terminate a conductor

- Actuation via push-in
- Ready to install, immediately usable
- Compact sizes

Notes

Safety Information	in grounded power lines

Electrical data

Ratings per

		EN 60664	
Overvoltage category	III	III	II
Pollution degree	3	2	2
Nominal voltage	-	-	400 V
Rated impulse withstand voltage	-	-	4 kV
Rated current	-	-	24 A

General information

Wiring direction	Side-entry wiring

Connection Data

Clamping units	3
Total number of potentials	1

Connection 1

Connection type	Installation side
Connection technology	PUSH WIRE®
Number of connection points	2
Actuation type	Push-in
Connectable conductor materials	Copper Aluminum
Connectable conductor materials (note)	**Terminating Aluminum Conductors (not for use in North America)** WAGO Spring-Clamp Terminal Blocks are also suitable for solid aluminum conductors up to 4 mm²/12 AWG if WAGO Aluminum Contact Paste 249-130 is used for termination. Aluminum Contact Paste Advantages: ▪ Automatically destroys the oxide film during clamping. ▪ Prevents fresh oxidation at the clamping point. ▪ Prevents electrolytic corrosion between aluminum and copper conductors (in the same terminal block). ▪ Provides long-term protection against corrosion. Using terminal blocks with CAGE CLAMP® Spring Pressure Connection Technology, **aluminum conductors must first be cleaned with a blade** and then immediately inserted into the clamping units filled with aluminum contact paste. For spring clamp connections with PUSH WIRE® connection technology, **WAGO recommends that the aluminum conductor first be cleaned** and then immediately inserted into the clamping unit filled with aluminum contact paste. It is also possible to apply WAGO Aluminum Contact Paste **additionally** on the whole surface of the aluminum conductor before termination. Please note that the nominal currents must be adapted to the reduced conductivity of the aluminum conductors:: 2.5 mm² = 16 A 4 mm² = 22 A
Solid conductor	1 … 2.5 mm² / 16 … 14 AWG
Strip length	9 … 11 mm / 0.35 … 0.43 inches
Wiring direction	Side-entry wiring

Connection 2

Connection type	Lighting side
Connection technology	CAGE CLAMP®
Number of connection points	1
Solid conductor	0.5 … 2.5 mm² / 20 … 14 AWG
Fine-stranded conductor	0.5 … 2.5 mm² / 20 … 16 AWG

Physical data

Width	9.5 mm / 0.374 inches
Height	15.5 mm / 0.61 inches
Depth	20.5 mm / 0.807 inches

Material data

Note (material data)	Information on material specifications can be found here
Color	white
Fire load	0.042 MJ
Weight	2.1 g

Environmental requirements

Ambient temperature (operation)	+60 °C
Continuous operating temperature	105 °C

Commercial data

Product Group	7 (Push Wire Conn.)
PU (SPU)	1000 (100) pcs
Packaging type	Box
Country of origin	CH
GTIN	4044918583596
Customs tariff number	85369010000

Product Classification

UNSPSC	39121409
eCl@ss 10.0	27-14-11-03
eCl@ss 9.0	27-14-11-03
ETIM 9.0	EC000446
ETIM 10.0	EC000446
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,No Exemption

Continued on next page

Approvals / Certificates

General approvals

Approval	Standard	Certificate Name
CSA DEKRA Certification B.V.	C22.2	154112
UL UL International Germany GmbH	EN 60998	CCA-2617-A1
UL UL International Germany GmbH	EN 60998	D-05895-A1 (EN60998-1 EN60998-2-2)
UL UL International Germany GmbH	UL 486C	E69654
VDE VDE Prüf- und Zertifizierungsinstitut	EN 60998	40022792

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications

Approval	Standard	Certificate Name
ABS American Bureau of Shipping	-	23-2417173-PDA
LR Lloyds Register	EN 60998	LR22207029TA
PRS Polski Rejestr Statków	EN 60998	TE/1093/880590/23

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 224-112

Documentation

Bid Text

224-112	19.02.2019	xml 3.46 KB	
224-112	21.02.2019	docx 15.55 KB	

Continued on next page

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 224-112	EPLAN Data Portal 224-112
	WSCAD Universe 224-112
	ZUKEN Portal 224-112

1 Compatible Products

1.1 Optional Accessories

1.1.1 Tool


1.1.1.1 Aluminum contact paste




Item No.: 249-130
Syringe; Contents: Aluminum Contact Paste, 20 ml

Installation Notes

Conductor termination




Lighting Connectors (2.5 mm²), 224 Series




Strip conductor to 9 … 11 mm (0.35 … 0.43 inch).

Conductor termination






To connect: Press button fully, insert stripped conductor into square entry and release.




To remove: Press button and withdraw conductor.

Conductor termination





To connect: Insert stripped solid conductor into circular entry and push until it hits the backstop.



To remove: Hold conductor to be removed and twist alternately left and right while slightly pulling the connector.

Continued on next page

Testing



Testing via separate test ports.